POPULAR SCIENCE Monthly

Sept., 1948 • 25c

How Dual-Fuels Pep Up Cars

NEW! ONE Giant Encyclopedia

to answer your questions in

All 15 Practical Sciences

15 BIG BOOKS IN ONE for Amazingly Low Price of only 1 only $4.95

Prepared by 15 Leading Authorities at Stevens Institute of Technology

EVERY one of the thousands of subjects in this New Practical and Technical Encyclopedia has been newly edited by the famous authorities at the Stevens Institute of Technology, headed by John Damm, Assistant Dean of the Institute. These men are outstanding experts in their various technical fields. They have covered for you the entire range of practical knowledge, from basic principles to the newest methods and discoveries. You may turn to this book with assurance that you will find the simplest, clearest, most up-to-date help available on your subject and on every related subject.

6 Ways This Book Will Quickly Repay You Its Small Price

1. It will repay its tiny cost over and over in newest time and money saving facts and methods you need on every job you tackle.
2. It will widen your practical knowledge with thousands of facts in other fields related to yours.
3. It will improve the **quality** of your work and help you get more pay for it.
4. It will help increase the **scope** of your work and speed your advancement to a more responsible job.
5. It will help you lick problems that stump others; help you gain a reputation as a 'trouble-shooter.'
6. It will multiply a thousand-fold the fun you get in your own Hobby workshop.

From A to Z, from Basic Principles to Newest Methods—Here's Reliable Help on Every Technical Problem

NOW yours for the first time, in this 15 books-in-one, a brand new illustrated encyclopedia of information covering the whole range of ALL 15 Practical Sciences—prepared for every day use. Here are instant, reliable, time-saving answers to questions on planning and estimating technical jobs; on engineering, construction, installation, maintenance and repair. Here is everything you want to know about the practical details of Automobile Work, Electricity, Aeronautics, Building, Painting, Plumbing, Carpentry. Here are thousands of needed facts in the fields of Chemistry, Physics, Metallurgy, Sheet Metal, Foundry Work, Radio, Television, Printing, Plastics, Etc.

Thousands of articles cover ALL 15 fields in alphabetical arrangement so that you quickly find what you need. If you work or study in technical fields, you will save time and money by referring to the thousands of facts and figures, formulas and methods, principles and short cuts that are packed in this book! Cross references give you the benefit of complete courses of study in ALL 15 fields.

OVER 1000 ILLUSTRATIONS

Simple Text and Pictures Make Every Fact Instantly Understandable

The huge number of drawings, diagrams, cross-sections and plans makes the information explicit and easy to follow. They show you "how-to-do-it"—step by step. They make every mechanical and scientific process crystal-clear. They make the meaning of every term understood at a glance. The inside of a clutch assembly, the layout of a drainage system; details of roof design, types of mechanical gears; cross-section of a foundry furnace, details of a wiring plan; workings of a steam engine, a fuel pump, a generating station—these are just a few of hundreds of explanatory illustrations provided. Included are pictures of hand and machine tools with instructions for getting best results with them.

In addition there are scores of quick-reference tables that are packed with valuable data to save you guessing or hours of figuring.

A Gold-Mine of Information!

Never before have all 15 Practical Sciences been covered in a single volume like this one! Here are the answers to thousands of questions like these:

How is an aerofoil constructed? How do I connect a drainpipe to a back inlet gulley? What is bonderizing? How do I install hydraulic brakes? How do I make a multi-core electric cable? How do I keep impurities out of a welding job? How is gold leaf made? How do I grind the proper angle on a cutting tool? What types of construction joints are there? Which type of lathe should I use? What sand mixtures are required for various types of foundry moulding? What is the wave length of long infra-red rays? What is the method of stippling and texturing paint? How can I make a projection drawing?

Whether you earn your living in a technical field or have techincal hobbies; whether you're a home-owner, inventor or student you'll find this book a priceless daily help. Covering the scope of 15 volumes in ONE, it's a truly amazing value at only $4.95!

Examine It a Week FREE!

You would gladly pay $4.95 for an encyclopedia covering a single one of these 15 practical fields. Here's a bargain virtually 15 times as great—15 Encyclopedias-in-one at the price of only one! Prove to yourself that this is the most helpful, most comprehensive volume of its kind you have ever seen at anything like its low price! Just mail the coupon on next page and we will ship you a copy for *7 days Free Trial.*

You need send no money now. If you don't feel it's one of the most valuable books you've ever seen, simply return it and owe nothing. Or, if you're completely pleased with it, pay the small price of only $4.95, plus a few cents postage, in easy monthly installments if you wish. Act now—just mail the coupon. Wm. H. Wise & Co., Inc., 50 West 47th Street, New York 19, N. Y.

TRY IT 7 DAYS FREE!

MAIL FREE-TRIAL COUPON ON OPPOSITE PAGE

PACKED WITH INSTANT "HOW-TO-DO-IT" INFORMATION, FORMULAS, DIAGRAMS, for

Inventors, Engineers, Carpenters Metal Workers, Electricians, Painters, Plumbers, Chemists, Radio & Auto Mechanics, etc.

OVER 1000 HOW-TO-DO-IT PICTURES!

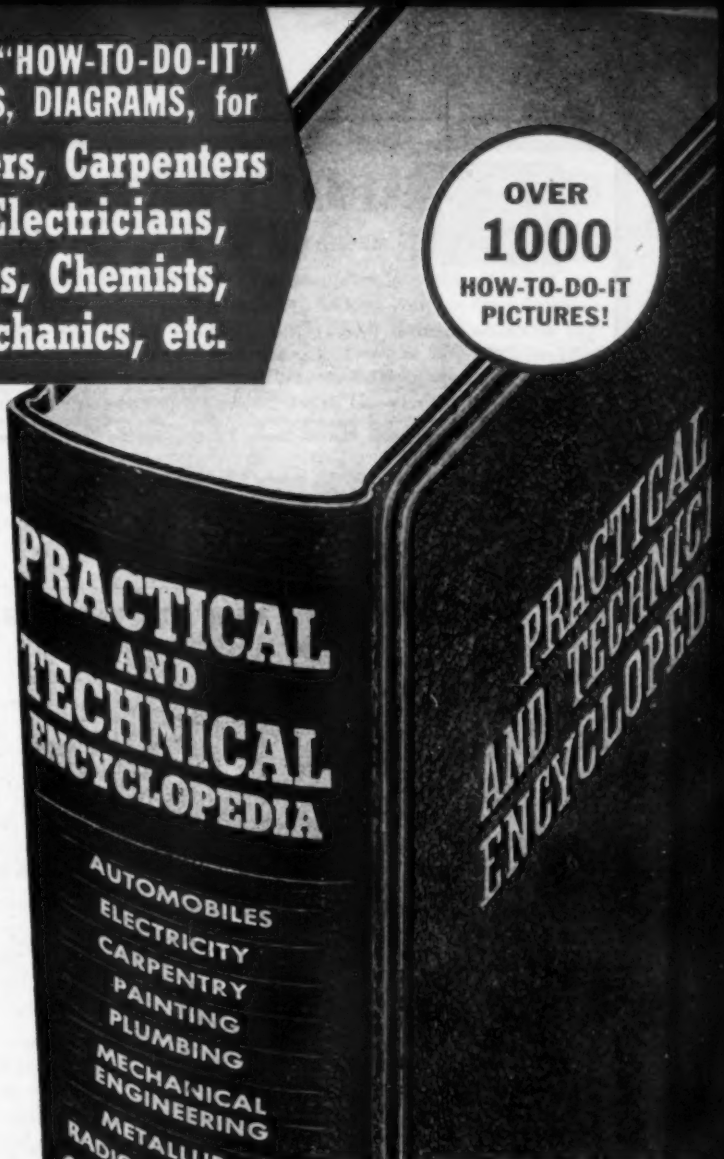

COVERS THESE 15 FIELDS:

MECHANICAL ENGINEERING Cams, gears, bearings, pulleys, machines, mechanical drawing, steam engines, turbines, viscosity, etc.

AUTOMOBILES Carburetor, clutch, transmission, starter, generator, motors, cooling systems, lubrication, chassis, etc.

ELECTRICITY Electro-magnetism, wiring circuits, inductors, insulators, rectifiers, motors, instruments, transformers, etc.

AERONAUTICS Cooling systems, directional gyro, fuselage, jet propulsion, propellers, airfoils, etc.

BUILDING Foundations, doors, windows, dormers, stairs, roofs, floors, concrete, lumber waterproofing, etc.

PAINTING & DECORATING Enamels, paints, gilding, varnishes, shellac, spraying, plastering, brushes, filling knives, etc.

PLUMBING Heating systems, water and drainage systems, pipe jointing and fixing, ventilation, etc.

CARPENTRY Tools, clamps, drills, glues, joints and fastenings, grinding, sanding, etc.

CHEMISTRY AND PHYSICS Atomic energy, neutrons, elements, plastics, radio activity, synthesis, cellulose compounds, etc.

METALLURGY Bonderizing, casting, coslettizing, notched-bar testing, open-hearth process, shepardizing, transverse test, etc.

SHEET METAL Drop stamping, continuous rolling, hydraulic press, spinning, welding, pattern-making, riveting, etc.

FOUNDRY Molds, die casting, furnaces, types of ingot, molding sands, plate molding, pouring temperatures, etc.

RADIO AND TELEVISION Condensers, iconoscopes, aerial systems, loud speakers, microphones, radar, radio servicing, broadcasting, etc.

PRINTING Letterpress, lithography, proofing, paper-making, printing inks, typesetting, collotypes, bookbinding, etc.

—these are merely suggestive of the wealth of detailed information contained all in this one book!

Copyrighted by Wm. H. Wise & Co., Inc.

MAIL THIS FREE TRIAL COUPON

Wm. H. Wise & Co., Inc., 50 West 47th Street, New York 19, N.Y.

I wish to examine, without cost or obligation, a copy of **THE NEW PRACTICAL AND TECHNICAL ENCYCLOPEDIA,** complete in one volume of 640 pages, with more than 1,000 illustrations, in handsome, sturdy novelex binding. When it is ready, ship it prepaid. After a week's free examination, I will either return the book and owe nothing, or I will keep it and send you only $1.00 as first payment, and the balance at the rate of $1.00 a month, until the total price of only $4.95, plus a few cents postage, is paid.

DO NOT WRITE IN BOXES

154

809

SAVE MORE: Send only $5.00 with this coupon and we will stand all shipping charges. Same return privilege; refund guaranteed.

Mr.
Mrs.
Miss
Address
City & Zone No. State

☐ Check here if you want De Luxe Edition, bound in genuine Morocco Grained Artcraft, with Thumb-Notch Index, for only $1. extra.

☐ **COMPANION VOLUME:** Initial here to reserve Companion Volume "Complete Home Handyman's Guide." 512 pages packed with expert "how-to-do-it" instructions and 1,200 graphic pictures on home repairs, decorating, building, and improvements. **ONLY $3.95 PLUS POSTAGE.** Free Trial and same easy terms.

FOUNDED 1872

POPULAR SCIENCE

MECHANICS AND HANDICRAFT REG. U. S. PAT. OFF. *Monthly*

VOL. 153: NO. 3

EDITOR: Perry Githens

MANAGING EDITORS: Fred O. Newman, Volta Torrey. **ART EDITOR:** Howard C. Jensen.

MECHANICS & HANDICRAFT EDITOR: Harry Walton.

ASSISTANT MANAGING EDITORS: Hartley E. Howe, Frank Rowsome, Jr.

ASSOCIATE EDITORS: Howard Allaway, Alden P. Armagnac, Devon Francis, Robert Gorman, Sheldon Gallager, Herbert Johansen, Martin Mann, Denis Sneigr, Robert P. Stevenson.

STAFF PHOTOGRAPHERS: W. W. Morris (Chief), Hubert Luckett, Orlando Guerra (Darkroom).

WESTERN EDITOR: Andrew R. Boone (Los Angeles).

ART DIRECTOR: Harry Samuels. **ART ASSOCIATES:** Herbert Anthony, Eric Karminski, Jr., Richard Meyer, Saverio Rada, Frances Cooper (Production).

EDITORIAL ASSISTANTS: Mae G. Dyer (Assistant to the Editor), Julia Charnif, Carol Ennis, Charlotte Korch, Georgette Sparks, Ruth Westphal.

WASHINGTON CORRESPONDENT: John F. Loosbrock

PUBLISHER: Godfrey Hammond

CONTENTS FOR SEPTEMBER, 1948

Cover Painting by Reynold Brown

Science News

Meter Analyzes Colors....105
Sound Times Tin Fish....128
Army Tries Water Wings....131
Camera Snaps Jet Flaws....142
Glass Tube Samples Steel....145

Science at Work

Inside Looking Up.... 97
350-Ton Building Moved 70 Miles....108
Air Motor Twirls Huge Pipe Wrench....121
Hydraulic Giant Bends 5-Ft. Pipe....121
Soft Shoes Save Soldiers....133

PS Features

Wiring the UN for World Listening....122
Toys Dramatize Science....143
Dagwood Splits the Atom....146
How an Electric Shaver Works....166
Water Starts a Fire....234

Aviation

'Copter Makes Good as Oil Detector....106
Map Tells Weather at a Glance....109
'Chuting Motorboat for Sea Rescues....111
Flexing Air Giants' Muscles....130
Rockets on Wires Hit 125 m.p.h....132
40-Ton Flying Wing to Carry 80 People..137
What's New in Aviation....150
Air Races 4 Times Sound....152
Your First Trip in a Stratocruiser....160

Automobiles

How Dual-Fuels Pep Up Cars.... 98
Jump into the Jeepster....110
Tractor Does New Jobs....131
Bouncer Tests Springs....145
Your Tire May Be "Lucky Wonder"....153
"Train" Rides Road....159
Care of Motorcycle Battery....169
Hints from the Model Garage....170
Gus Plugs for Cupid....172

Inventions

Box Sends Telegrams....105
New Ideas from the Inventors....134
Turbine Designed for a Car....138

New Products

Rubber Makes Casting Mold....129
"Y" Strengthens Chair....133
Phone Aid Frees Hands....145
Wheel Does Many Jobs....159
Vibrating Sander Waxes and Polishes....212
Hearing-Aid Batteries Recharged....229
Grill Packs Up for Carrying....237
Front-Wheel Drive Tractor....240

Photography

Camera Snaps Flying Shot....140
Tester Saves Photo Paper....218
Flashlight Makes Color Projector....222
Subjects Snap Selves....223

Ⓣ *This mark in text indicates Trade Name.*

Continued on page 4

Popular Science Monthly is published monthly at 353 Fourth Avenue, New York 10, N. Y., by Popular Science Publishing Co., Inc., Godfrey Hammond, President and Treasurer; R. C. Wilson, Raymond J. Brown, Stephen P. Glennon, Vice-Presidents; F. W. Briggs, Secretary. Entered as second-class matter Dec. 28, 1918, re-entered as second-class matter February 11, 1948, at the Post Office in New York, N. Y., under the act of March 3, 1879; additional entry as second-class matter at Dayton, Ohio. Entered as second-class matter at the Post Office Department, Canada. Printed in U.S.A. Copyright, 1948, by Popular Science Publishing Co., Inc. All rights reserved in the United States, Great Britain, and in all countries participating in the International Copyright Convention and Pan-American Copyright Convention. Yearly subscriptions to United States, its possessions and Canada, $3.00 (2 years, $5.50; 3 years, $7.50); foreign countries $1 per year extra. Subscribers must notify us of change of address four weeks in advance of the next publication date. Be sure to give both old and new addresses, including zone numbers. Vol. 153: No. 3.

FREE 7-DAY TRIAL

JUST MAIL COUPON

HOW TO BUILD A BETTER HOME

If You Are Undecided Whether You Should Build or Buy—
If You Are Leery of 'Cheap' Building, Shoddy Work or Poor Design—
If You Are Fed-Up With DREAMING About Your New House and Want to Get STARTED—Then This Will Prove a GOD-SEND to YOU!

HERE is the answer to how to build your own home. Here is the WORKS—how to plan, how to construct, how to supervise—simply, clearly explained step-by-step. Jam-packed with everything you need to know about building your own home yourself, or having a contractor build it for you. Hundreds of clear-cut, **complete** diagrams. You will be able to build a home that will amaze everyone!

Everything You Need to Know to Get Started

Some of the Things This Book Explains:
Here at Your Fingertips, the Secrets that Produce Fine Small Homes — Completely Revealed in this Great-Easy-Reference Book!
How to Get Started; Deciding Upon Home Ownership; How to Select Professional Service; How to Finance Your Home; How to Select a Building Lot; How to Plan the Home; How to Fill Out Contract Documents; How to Obtain Good Construction; How to Prevent Termites; How to Prevent Decay; How to Prevent Corrosion; How to Lay Out Building, Excavate, Grade; Monolithic Concrete Construction; Masonry Construction; Footings for Foundation Walls, Chimneys, Piers; How to Build Piers, Foundation Walls; Basement Construction; How to Waterproof Basements and Foundation Walls; How to Build Chimneys and Fireplaces; How to Select the Proper Species and Grades of Wood; House Framing Methods and Details; Finish Carpentry and Millwork; How to Insulate; Sheet-Metal Work, Roofing, Stucco, Lath and Plaster; How to Paint and Finish; Tile Work, Electrical Work, Plumbing, Heating; List of Publications for the Home Builder (10c Free); Where to Get Stock Plans; Taxes, Insurance, Interest, Maintenance, Assessments; How to Choose a Bank, Real Estate Dealer, Contractor; Locating Lot, Tax Searches, Comparative Costs, Designs; Prefabricated Houses, Bungalows, List of Usual Mistakes; Architectural "Don'ts" and over 300 additional paragraphs of important information.

QUICK REFERENCE INDEX TO SPECIAL PAGE-SIZE PLATES (HUNDREDS OF ILLUSTRATIONS)
Footings — foundation walls — basements; Garage floor, footings, etc. — septic tank—grease trap—area for basement window; Concrete porches, steps, automobile runways and driveways and walks; Brick steps, walks and terraces; Brick, tile and stone wall details—flagstone and stepping stone walks; Masonry dwellings—brick veneer walls; Chimney and fireplace details; Balloon framing details (minimum-shrinkage type); Balloon framing details (box sill type); Roof framing details; Basement columns and girders—framing of openings—bridging; Miscellaneous framing details; Waterables—exterior sidewalls of siding or shingles—cornices—porch columns; Double-hung wood window details; Door frame details—points for millwork—stock doors and windows—sash details; Paneling—stairwork—baseboard details; Termite shields—miscellaneous flashings; Flashing details; Gutters and leaders (downspouts); Roofing details.

Nothing Like It Before! One Simple Fact May Repay you a HUNDRED Times Its Small Cost. A Book You Will Refer to for Years to Come!

Provides you with all the facts. Whether you are going to spend $2,000 or $20,000 for your home—whether you are going to employ an architect or use stock plans—or whether you are going to buy a house instead of building, this book will help you. Before you build you should know the difference between good and bad construction.

Now—in these days of shortages—just *one* of the hundreds of diagrams can save you hundreds of dollars. You will get a thrill out of being "in the know," being "wise" to the game, being able to talk to building people in their own language. You'll be respected, admired, and get better workmanship on your home. You'll get a feeling of pride as your friends admire the home being built. Here, in one clear-cut volume is *all* the basic information you will need!

Where to Begin
No matter what your building problem may be, you will find the answer in this amazing volume. No truth is kept from you. You are told the disadvantages of home ownership as well as the advantages. You are told of the precautions you will need to safeguard your investment. You are shown how to select a lending institution, a lawyer, a real estate dealer, an architect, a contractor. Your questions on methods of buying are fully answered. Just a quick glance at the partial table of contents on this page will show you some of the thousands of **facts** on building which this **complete** volume contains. Those who have bought a copy write that they have never seen so thorough a work on this subject for **any price, anywhere!**

Hundreds of Construction Details
Explains all the "mysteries" of permits, contract forms, and construction. Tells you how to build the right kind of home, how to avoid "cheap," cracker-box construction, how to get a house that is suitably located, beautiful to look at and priced within your means—a house you will be proud to call your **home.**

How to Build—from Plans to Paint
Not one important step is missing from this volume. See for yourself. Every conceivable thing you would want to know about building will be found in this wonderful new book!

Read What Great Building Authorities Say About This Amazing Book (names on request)
Excerpts from typical letters of praise:
". . . the best book on the subject that has been published to date." . . . "was thrilled" . . . "valuable information for the new home-builder."
". . . an excellent piece of work" . . . "helped us decide our building plans" . . . "well worth price."
". . . very much impressed . . . an excellent reference book."
". . . the writing is clear and compact . . . complete and unbiased information."
". . . most interesting and complete." "You are to be congratulated. Contains more information than any volume seen . . . Everything you said."
". . . One of the best works of its kind I have ever seen. Send me 10 more for presents."
And from an amateur:
"From this book, I did the plans myself! Had never done anything like it before . . . A neighboring architect said I was an up-and-coming designer and he found not one fault with my plans . . . The building is now finished and everyone says it's *beautiful!* . . . I saved $1900!"

SEND NO MONEY
Examine it for 7 Days FREE!
You don't even risk a cent to examine "How to Build a Better Home." Just mail coupon. Study book for a week, FREE! See how easy it is to supervise or build a better home, YOURSELF—even if you know nothing about construction NOW! Then, if you are THRILLED with this amazing volume, send only $3.98 (plus postage). If you are not thrilled, return book and pay nothing! This is your chance to build not just a house, but a BETTER HOME! Mail FREE EXAMINATION COUPON NOW, to The Westport Publishing Company, Dept. P89, Westport, Conn.

FREE Examination Coupon—Mail Now

The Westport Publishing Company,
"Books of Merit," Dept. P89
Westport, Conn.

Please send me, for one week's FREE EXAMINATION, a copy of "How to Build a Better Home." After 7 days I will either return this book and owe you nothing, or I will keep it and send you $3.98 (plus shipping charges).

Name.....Age.....
(please print)
Address.....
City & Zone.....State.....

☐ Save postage. Check here if you enclose full payment of $3.98 (check or money order) WITH coupon. WE will then pay shipping charges. If not thrilled with book, return it and we will refund your money by AIR MAIL! Foreign Orders $4.50 Cash.

SIX WINNERS

out of the first 10 at the 500 mile MEMORIAL DAY RACE at Indianapolis

USED PYROIL

To men who know auto performance best, PYROIL is a *must*. Year after year, winners of the gruelling 500 mile Memorial Day races have relied upon Pyroil.

Pyroil will add miles to your car by maintaining a constant film of oil on cylinder walls and by preventing sludge and carbon formation. Ask your gas station attendant to add Pyroil.

PYROIL FOR AIRCRAFT ENGINES

Use Aircraft Pyroil B for lubricating oil, Aircraft Pyroil A for gasoline.

GIVEN!

An attractive Pyroil metal savings bank—takes coins up to 50c pieces—is yours for the asking—sent postage paid.

Manufactured and Guaranteed by Pyroil Company, 347 Main Street, La Crosse, Wisconsin.

Canadian Distributors: Central Purchasing Agencies, Ltd., Toronto, Ontario

PYROIL COMPANY
347 Main Street, La Crosse, Wisconsin

I want my car to last and run properly. Please tell me more about Pyroil and how it can accomplish this for me.

Name .....

Address .....

City or Town ..... *State* .....

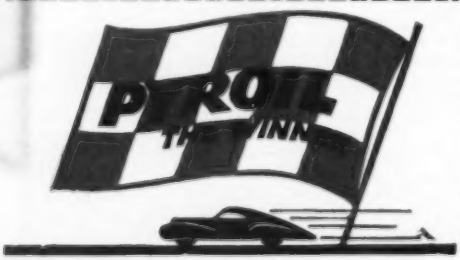

Mechanics & Shopwork

Movable Fence for Pattern Cuts.....201
Cutting Holes With Power Tools.....202
Three-Tool Holder for Small Parts.....207
Hand Chuck Stops Centerdrill Breaks....209
Telescopic Glass for Front-Row Seat.....213
Bench Holder Controls Soldering Iron....216
Revolving Blade Cuts Toy Wheels.....217
Arc Method of Finding Scale.....233
You Can't Forget the Goggles.....239
Pen Makes Carving Tool.....239

Home Mechanics & Handicraft

Navajo Makes Jewelry.....141
Dresser Box Shaped with Bandsaw.....178
Jigsawed Ship Model.....179
Aluminum Rack Holds Hot Dishes.....180
Tilt-Top Table Fits Small Space.....182
Gooseneck Lamp for Wall or Desk.....183
Scoop Server Carved from Redwood.....184
Chess Set Carved from Steatite.....185
Turning Radiators Into Furniture.....186
Twisted Candlesticks.....190
Driving Nails Under Water.....191
Gadgety Box Amuses Children.....191
How to Repair Tile Walls.....194
Collector Rings Feed Cord Reel.....198
Clear-Plastic Pipe Rack.....200
Carved Crocodile Makes Letter Opener..205
Wrench Serves as File Holder.....208
Oil Can Is Shop Drawer.....212
Wood-Burning Pencil.....216
Jig Duplicates Model-Plane Ribs.....217
Quarter-Round Conceals Wires.....231
Hinge Locks Sliding Window.....232
Uses for Old Garden Hose.....238

Radio & Electricity

This Capsule Challenges Vacuum Tubes..117
Taxi Gives Tele Shows.....142
Mine Radios to Send SOS From Depths..168
Midget Portable Is on the Ball.....224
Recharger Peps Up Flashlight Cells.....228
Photometer Checks Circuits.....231

Departments

Letters 16
The Voice of Science..... 95
I'd Like to See Them Make.....107
Projects Built by PS Readers.....189
Keeping the Home Shipshape.....192
What's Your Ingenuity Quotient?.....197
New Tools.....206
New Shop Ideas.....210
Photo Ideas & Equipment.....220
News in Electronics.....230
Aids to Modern Living.....298
To: Reader—From: Editor.....302

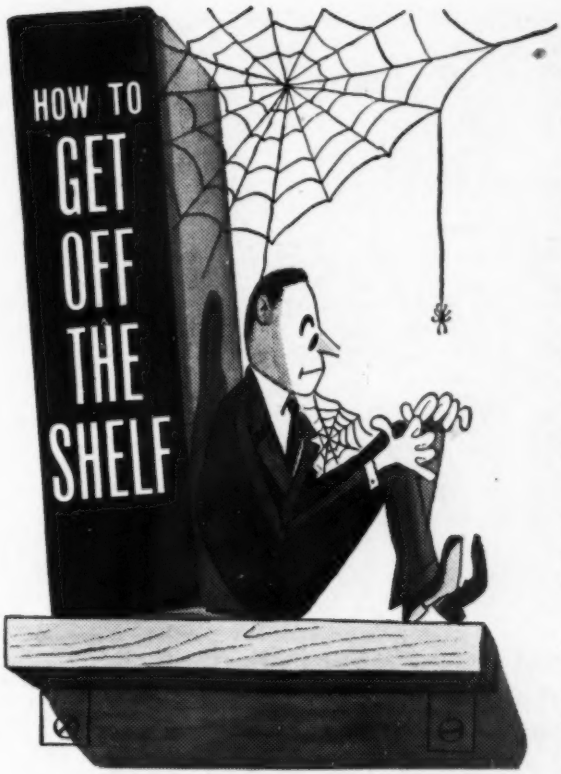

ONE or two promotions . . . several pay raises . . . and then that long, long stretch "on the shelf." You want to keep on climbing. You want to feel that you are getting somewhere. But how?

I. C. S. can show you. A little more training could be all you need to get back in the *upswing*. An advanced course or a "refresher" —studied in your spare time—will help prepare you for the next step, will show that you are ready to handle more responsibility, a better job.

Trained men get the "breaks"! That's a fact proved over and over again by the records of former I. C. S. students.

You don't want to bog down in your job. You don't want to remain "on the shelf" with the untrained. Mail the coupon today for complete information on how you can join the steady climbers.

INTERNATIONAL CORRESPONDENCE SCHOOLS

ICS

BOX 7613-M, SCRANTON 9, PENNA.

Without cost or obligation, please send me full particulars about the course BEFORE which I have marked X:

Business and Academic Courses
- ☐ Accounting ☐ Advertising
- ☐ Bookkeeping
- ☐ Business Administration
- ☐ Business Correspondence
- ☐ Certified Public Accounting
- ☐ Commercial
- ☐ Commercial Art
- ☐ Cost Accounting
- ☐ Federal Tax
- ☐ First Year College
- ☐ Foremanship ☐ French
- ☐ Good English ☐ High School
- ☐ Higher Mathematics
- ☐ Motor Traffic ☐ Postal Civil Service
- ☐ Retailing ☐ Retail Store Management
- ☐ Salesmanship ☐ Secretarial
- ☐ Sign Lettering
- ☐ Spanish ☐ Stenography
- ☐ Traffic Management

Air Conditioning and Plumbing Courses
- ☐ Air Conditioning
- ☐ Heating ☐ Plumbing
- ☐ Refrigeration ☐ Steam Fitting

Chemistry Courses
- ☐ Chemical Engineering
- ☐ Chemistry, Analytical
- ☐ Chemistry, Industrial
- ☐ Chemistry, Mfg. Iron & Steel
- ☐ Petroleum Refining ☐ Plastics
- ☐ Pulp and Paper Making

Civil Engineering, Architectural and Mining Courses
- ☐ Architecture
- ☐ Architectural Drafting
- ☐ Building Estimating
- ☐ Civil Engineering ☐ Coal Mining
- ☐ Contracting and Building
- ☐ Highway Engineering
- ☐ Lumber Dealer
- ☐ Reading Structural Blueprints
- ☐ Sanitary Engineering
- ☐ Structural Drafting
- ☐ Structural Engineering
- ☐ Surveying and Mapping

Communications Courses
- ☐ Electronics
- ☐ Practical Telephony
- ☐ Radio, General ☐ Radio Operating
- ☐ Radio Servicing
- ☐ Telegraph Engineering

Electrical Courses
- ☐ Electrical Drafting
- ☐ Electrical Engineering
- ☐ Electric Light and Power
- ☐ Lighting Technician
- ☐ Practical Electrician
- ☐ Power House Electric
- ☐ Ship Electrician

Internal Combustion Engines Courses
- ☐ Auto Technician ☐ Aviation
- ☐ Diesel-Electric
- ☐ Diesel Engines ☐ Gas Engines

Mechanical Courses
- ☐ Aeronautical Engineer's, Jr.
- ☐ Aircraft Drafting ☐ Flight Engineer
- ☐ Forging ☐ Foundry Work
- ☐ Heat Treatment of Metals
- ☐ Industrial Engineering
- ☐ Industrial Metallurgy
- ☐ Machine Shop
- ☐ Machine Shop Inspection
- ☐ Mechanical Drafting
- ☐ Machanical Engineering
- ☐ Mold-Loft Work
- ☐ Patternmaking—Wood, Metal
- ☐ Reading Shop Blueprints
- ☐ Sheet-Metal Drafting
- ☐ Sheet-Metal Worker
- ☐ Ship Drafting ☐ Ship Fitting
- ☐ Tool Designing ☐ Toolmaking
- ☐ Welding—Gas and Electric
- ☐ Welding Engineering

Railroad Courses
- ☐ Air Brake ☐ Car Inspector
- ☐ Diesel Locomotive
- ☐ Locomotive Engineer
- ☐ Locomotive Fireman
- ☐ Locomotive Machinist
- ☐ Railroad Section Foreman

Steam Engineering Courses
- ☐ Boilermaking
- ☐ Combustion Engineering
- ☐ Engine Running
- ☐ Marine Engineering
- ☐ Steam Electric ☐ Steam Engineer

Textile Courses
- ☐ Cotton Manufacturing ☐ Loom Fixing
- ☐ Rayon Weaving ☐ Textile Designing
- ☐ Woolen Manufacturing

Name_____ Age_____ Home Address_____

City_____ State_____ Working Hours_____ A.M. to_____ P.M.

Present Position_____ Employed by_____

Special tuition rates to members of the Armed Forces. Enrollment under G.I. Bill and P.L. 16 approved for World War II Veterans.
Canadian residents send coupon to International Correspondence Schools Canadian, Ltd., Montreal, Canada.

HERE IS YOUR JOB in AVIATION

We have hundreds of urgent requests for Embry-Riddle ground and flight graduates -- 40 times the graduates we had available could have been placed in the last 3 months. Never has there been such opportunity for you in aviation. Begin your career now. A few short months at Embry-Riddle and you're ready for a good job with best pay.

EMBRY-RIDDLE OFFERS

Complete training in minimum time for A&E Mechanics and all fundamental flight, specialist and technical positions • Modern airline-size hangars, classrooms, shops and airplanes • Experience gained over a quarter-century of aviation training • Living facilities on the airport.

INDUSTRY NEEDS

Mechanics, technicians, specialists, engineers, pilots—many, many more men than all aviation schools together can supply. The shortage of trained personnel is becoming more acute. Get in on the ground floor... Embry-Riddle students are spoken for well ahead of graduation. Don't delay. Write for proof of job opportunities TODAY. Begin your aviation career at Embry-Riddle NOW.

Authorized training under the G. I. Bill of Rights

Please rush me complete information on Embry-Riddle training and details of job opportunities for Embry-Riddle graduates.

Dean of Enrollments - Dept. 81
Embry-Riddle School of Aviation
Miami 30, Florida

Name _____ *Age* _____

Address _____

City _____ *State* _____

CHECK ONE:

Veteran ☐

Non-Veteran ☐

Embry Riddle International SCHOOL OF AVIATION MIAMI 30 FLORIDA

TRAIN IN MIAMI -- AIR CAPITAL OF THE WORLD

IF you're that man, here's something that will interest you.

Not a magic formula—not a get-rich-quick scheme—but something more substantial, more practical.

Of course, you need something more than just the desire to be an accountant. You've got to pay the price—be willing to study earnestly, thoroughly.

Still, wouldn't it be worth your while to sacrifice some of your leisure in favor of interesting home study—over a comparatively brief period? Always provided that the rewards were good—a salary of $3,000 to $10,000?

An accountant's duties are interesting, varied and of real worth to his employers. He has *standing!*

Do you feel that such things aren't for you? Well, don't be too sure. Very possibly they *can* be!

Why not, like so many before you, investigate LaSalle's modern Problem Method of training for an accountancy position?

Just suppose you were permitted to work in a large accounting house under the personal supervision of an expert accountant. Suppose, with his aid, you studied accounting principles and solved problems day by day—easy ones at first—then more difficult ones. If you could do this—and could turn to him for advice as the problems became complex — soon you'd master them all.

That's the training you follow in principle under the LaSalle Problem Method.

Over 2800 Certified Public Accountants among LaSalle alumni

You cover accountancy from the basic Principles right up through Accountancy Systems and Income Tax Procedure. Then you add C. P. A. Training and prepare for the C. P. A. examinations.

As you go along, you absorb the principles of Auditing, Cost Accounting, Business Law, Statistical Control, Organization, Management and Finance.

Your progress is as speedy as you care to make it—depending on your own eagerness to learn and the time you spend in study.

Will recognition come? The only answer, as you know, is that success *does* come to the man who is really *trained*. It's possible your employers will notice your improvement in a very few weeks or months. Indeed, many LaSalle graduates have paid for their training—with increased earnings—before they have completed it! For accountants, who are trained in organization and management, are the executives of the future.

Write For This Free Book

For your own good, don't put off investigation of *all* the facts. Write for our free 48-page book, "Accountancy, The Profession That Pays." It'll prove that accountancy offers brilliant futures to those who aren't afraid of serious home study. We'll also include "Ten Years' Promotion in One" — a book which has helped many men. Send us the coupon *now*.

LASALLE EXTENSION
CHICAGO 5, ILL.

Other LaSalle Opportunities

- ☐ Higher Accountancy
- ☐ C.P.A. Coaching
- ☐ Bookkeeping
- ☐ Law: LL.B. Degree
- ☐ Business Management
- ☐ Salesmanship
- ☐ Traffic Management
- ☐ Foremanship
- ☐ Industr'l Management
- ☐ Stenotypy (Machine Shorthand)

LASALLE EXTENSION UNIVERSITY
A CORRESPONDENCE INSTITUTION

417 S. Dearborn St. Dept. 983-H Chicago 5, Ill.

I want to be an accountant. Send me without obligation, "Accountancy, the Profession that Pays" training program—also "Ten Years' Promotion in One."

Name.....*Age*.....

Address.....

City, Zone & State.....

$1.50 A VOL.

HERE ARE THE ANSWERS

Audels Electric Library gives thousands of answers to your electrical problems. Every Electrician, Engineer, Mechanic, Maintenance Man and Student should know about these very helpful books.

The 12 volumes contain 9500 clear, simplified illustrations of the Theories and Applications of Electricity, and 7200 interesting pages of Practical Trade Information relating to Construction, Operation and Maintenance. Valuable for Ready Reference or Home Study. Price only $1.50 a volume, sold separately.

Audels Electric Library is truly a progressive home study course in Practical Electricity. Devote 15 to 30 minutes a day to its easy reading — acquire a practical working knowledge of Electricity in all its branches. Written in plain language.

AS A REFERENCE LIBRARY it is valuable. The Quick Finder Index helps you locate the desired information quickly. These books have helped thousands of men by giving them a broader knowledge of the whole field of Electricity. Take this opportunity to use our Book-A-Month Plan; mail the coupon today. No obligation unless satisfied.

AUDELS BOOK-A-MONTH PLAN

You will receive your first book for 7 days' Free Trial and Examination. If you are satisfied, send us only $1.50. If not O.K., return the book to us and you owe us nothing. When we receive your payment for the first book, we send you the second book.

REMEMBER: You can Start Your Subscription with Any Number you choose or Stop at Any Time. Not a cent to pay until you get the books. No obligation to buy unless satisfied.

MAIL THIS COUPON TODAY

AUDEL, PUBLISHERS
49 West 23rd St., New York 10, N.Y.

Please enter my subscription for AUDELS ELECTRIC LIBRARY, price $1.50 a volume. Mail one volume each month, for which I will remit $1.50 promptly.

Start with Volume Number_____

Name

Address

Occupation

Employed by

PSM

AUDEL, PUBLISHERS, 49 WEST 23rd ST., NEW YORK 10, N. Y.

AUDELS CARPENTERS & BUILDERS GUIDES—(4 Book Set).....$6

A practical illustrated trade assistant on modern construction for carpenters, joiners, builders, mechanics and all woodworkers. 4 vols., 1600 pages, 3700 illustrations. Fully indexed, flexible covers. Each volume sold separately $1.50 a vol.

AUDELS PLUMBERS & STEAMFITTERS GUIDES—(4 Book Set).....$6

A Practical Trade Assistant & Ready Reference. Explains in plain language & by clear illustrations, diagrams, charts, graphs, pictures principles of modern plumbing practice including Marine Pipe Fitting and Air Conditioning. 4 Vols.—1670 Pages—3642 Diagrams & Illustrations. Each Vol. Sold Separately $1.50 a Vol.

AUDELS OIL BURNER GUIDE.....$1

384 Pages Covering Installation, Servicing & Repairs All Types Domestic & Industrial Burners. Illustrated. Highly Endorsed.

AUDELS HOUSE HEATING GUIDE..$4

1000 Pages Covering Working Principles, Installation, Service of All Modern House Heating, Ventilating & Air Conditioning Systems. Explains New Radiant Heating. Fully Illustrated & Indexed.

AUDELS REFRIGERATION & AIR CONDITIONING GUIDE.....$4

New from Cover to Cover—1280 Pages, Fully Illus. Covering basic principles, servicing, operation & repair of household, commercial & industrial refrigeration & air conditioning. A gold mine of essential important facts for engineers, servicemen, users.

AUDELS SHEETMETAL WORKERS HANDY BOOK.....$1

Practical inside information. Fundamentals of Sheet Metal Work. 388 pages. Illustrated. 11 sections. Clearly written. Essential & important facts, figures, pointers in everyday language. Ref. Index.

AUDELS SHEETMETAL PATTERN LAYOUTS $4

Developed by Experts for Sheet Metal Workers, Layout Men & Mechanics. A Practical Encyclopedia in 10 Sections, size 7 x 10 x 2—1125 Pages—350 Layouts—1600 Illustrations. 1001 Key Facts. Fully indexed for ready reference in answering your layout problems. Covers all phases of sheet metal work including Pattern Cutting, Pattern Development & Shop Procedure.

AUDELS BLUE PRINT READING.....$2

For Mechanics & Builders. Covers all types of blue print reading including ship & airplane. 416 pages, fully illustrated.

AUDELS MATHEMATICS & CALCULATIONS FOR MECHANICS $2

Mathematics for home study or reference. 700 pages, 550 illus. Practical mathematics from beginning. How to figure correctly. Easy, correct methods covering complete review. Illus. & Indexed.

AUDELS AUTOMOBILE GUIDE.....$4

A practical quick ready reference book for auto mechanics, service men, operators & owners. Explains theory, construction & servicing of modern motor cars, trucks, buses & auto type Diesel engines. 1700 pages, fully illustrated. 55 chapters. Indexed. A standard book for mechanics. New Hydraulic drive covered.

AUDELS DIESEL ENGINE MANUAL....$2

A practical, concise treatise with questions and answers on the theory, operation and maintenance of modern diesel engines. Over 400 pages, fully illus. All details plainly brought out, this book is of extreme value to engineers, operators & students.

AUDELS WELDERS GUIDE.....$1

A concise, practical text on operation & maintenance of all welding machines for all mechanics. Over 400 pages, illustrated. Covers all methods of electric and acetylene welding including airplane work.

AUDELS MACHINIST & TOOLMAKERS HANDY BOOK $4

Covers modern machine shop practice in all its branches. Tells how to set up & operate lathes, screw and milling machines, shapers, drill presses & all other machine & hand tools. 1600 pages, fully illustrated. Indexed. 5 sections. 1—Modern Machine Shop Practice. 2—Blue Print Reading & How to Draw. 3—Calculations & Mathematics for Machinists. 4—Shop Physics. 5—How to Use the Slide Rule. 60 chapters. Easy to read and understand. A shop companion that answers your questions.

AUDELS ELECTRIC MOTOR GUIDE $4

Practical Information Covering Construction, Control, Maintenance & Wiring Hookups of All Types Electric Motors also Armature Winding. 1000 Pages Fully Illustrated & Indexed.

AUDELS ELEC. WIRING DIAGRAMS $1

210 Pages. Illustrated. Gives practical facts on wiring of electrical apparatus. It shows clearly how to wire apparatus for practically all fields of electricity. Each diagram is complete & self-explanatory. Highly Endorsed Pocket Companion.

AUDELS PRACTICAL ELECTRICITY $4

A key to a practical understanding of Electricity. For maintenance engineers, electricians & all electrical workers. 1440 Pages, 2600 Illus. Covers important electrical information in handy form—including wiring for Light & Power. Indexed.

AUDELS RADIOMANS GUIDE $4

A key to the practical understanding of radio including Frequency Modulation, Television, etc., Aircraft & Marine Radio. For radio engineers, servicemen, amateurs, 914 Pages, 633 Illustrations & Diagrams. Photos. Review Questions & Answers. Reference Index.

AUDEL, Publishers, 49 W. 23 St., N.Y. 10

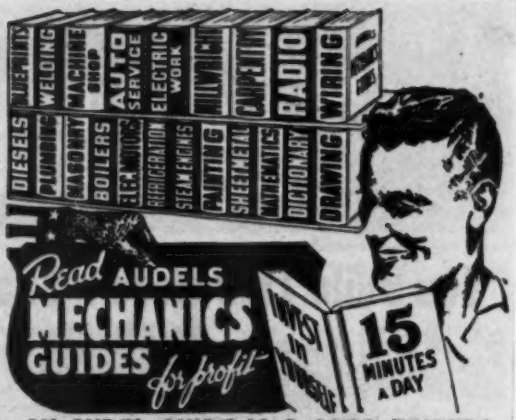

AN AUDEL GUIDE IS A GOOD FRIEND!

Step Up Your Own Skill with the Practical Facts and Figures of Your Trade. Save time and money with right methods, short cuts, labor saving ideas. CHECK NOW! You can look over any Audel Guide in your home. Start the Easy Payments if satisfied.

CUT HERE

MAIL ORDER

AUDEL, Publishers, 49 W. 23 St., New York 10, N. Y.

Please mail me for 7 days' free examination the books marked (X) below. I agree to mail $1 in 7 days on each book or set ordered, and to further mail $1 a month on each book or set ordered until I have paid the purchase price. If I am not satisfied with Guides I will return them.

- ☐ AUTOMOBILE GUIDE, 1700 Pages $4
- ☐ DIESEL ENGINE MANUAL, 400 Pages 2
- ☐ WELDERS GUIDE, 400 Pages 1
- ☐ CARPENTERS & Builders Guides (4 Book Set) . . . 6
- ☐ PLUMBERS & Steamfitters Guides (4 Book Set) . . 6
- ☐ MASONS and Builders Guides (4 Book Set) . . . 6
- ☐ BLUE PRINT READING, 416 Pages 2
- ☐ MASTER PAINTER & Decorator, 320 Pages 2
- ☐ GARDENERS & GROWERS GUIDES (4 Book Set) . . 6
- ☐ OIL BURNER GUIDE, 384 Pages 1
- ☐ HOUSE HEATING GUIDE, 1000 Pages 4
- ☐ REFRIGERATION & Air Conditioning Guide, 1280 Pages 4
- ☐ SHEET METAL WORKERS Handy Book, 388 Pages . 1
- ☐ SHEET METAL PATTERN LAYOUTS, 1100 Pages . . 4
- ☐ AIRCRAFT WORKER, 240 Pages 1
- ☐ MECHANICAL DRAWING GUIDE, 160 Pages . . . 1
- ☐ MECHANICAL DRAWING & DESIGN, 480 Pages . . 2
- ☐ MATHEMATICS and CALCULATIONS, 700 Pages . . 2
- ☐ MECHANICAL DICTIONARY, 968 Pages 4
- ☐ MACHINISTS & Toolmakers Handy Book, 1600 Pages . 4
- ☐ MILLWRIGHTS & Mechanics Guide, 1200 Pages . . 4
- ☐ POWER PLANT ENGINEERS GUIDE, 1500 Pages . . 4
- ☐ ENGINEERS & FIREMANS EXAMINATIONS, 528 Pages 1
- ☐ PUMPS, HYDRAULICS & Air Compressors, 658 Pages 4
- ☐ MARINE ENGINEERS Handy Book, 1280 Pages . . 4
- ☐ ENGINEERS and Mechanics Guides (8 Book Set) . . 12
- ☐ Answers on Practical ENGINEERING, 254 Pages . . 1
- ☐ ELECTRIC WIRING DIAGRAMS, 210 Pages 1
- ☐ ELECTRICIANS EXAMINATIONS, 250 Pages . . . 1
- ☐ ELECTRIC DICTIONARY, 9000 Terms 2
- ☐ ELECTRIC MOTOR GUIDE, 1000 Pages 4
- ☐ PRACTICAL ELECTRICITY Handy Book, 1440 Pages. 4
- ☐ ELECTRICAL POWER CALCULATIONS, 425 Pages . 2
- ☐ RADIOMANS GUIDE, 914 Pages. 4
- ☐ ELECTRONIC DEVICES, 216 Pages. 2
- ☐ NEW ELECTRIC LIBRARY, 7000 Pages (12 Book Set). 18

Vols. I, II, III, IV, V, VI, VII, VIII, IX, X, XI, XII—$1.50 Each

Name _____

Address _____

Occupation _____

Employed by _____ PSM

I Will Show You How to Learn RADIO

You Build This Modern Superheterodyne Receiver

As part of my Course, I send you the Speaker, Tubes, Chassis, Transformer, Loop Antenna—EVERYTHING you need to build this modern, powerful Radio Receiver. You also get parts to build many other real Radio circuits like those pictured here. Mail coupon for complete information.

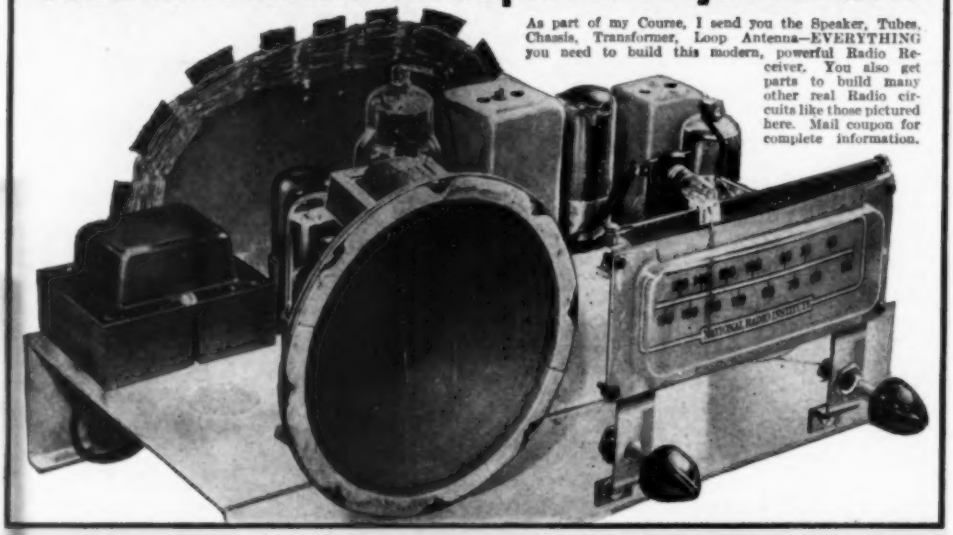



You build this Radio Circuit early in Course with Soldering Equipment and Radio parts I send; practice mounting, connecting, soldering Radio parts.



You practice Radio Servicing with this Tester built from parts I send. Also use it to help earn EXTRA MONEY fixing neighbors' Radios.



You practice "FM" Servicing on this Frequency Modulation (FM) Signal Generator, built with parts I supply; learn by repairing circuit defects.

MEN I TRAIN AT HOME GET GOOD JOBS LIKE THESE

MADE $1500 WHILE LEARNING

"By the time I finished my NRI training I had made $1500. When I started the Course I did not know a resistor from a condenser. I have bought my home. My income from Radio work, etc., is about $3,000 a year." — WILLIAM THOMAS, Baldwyn, Mississippi.

ASSISTANT TO CHIEF ENGINEER AT STATION WHJB

"Have been employed for the past two years as assistant to the chief engineer at Radio Station WHJB. Knew nothing about Radio when I enrolled for the NRI Course."—CECIL J. GIUNIPERO, Greensburg, Pennsylvania.

KNEW NOTHING ABOUT RADIO

"I knew nothing about Radio when I enrolled. At present I am doing spare time work. I have more than paid for my Course and I have about $300 worth of equipment which has paid for itself." — RAYMOND HOLTCAMP, Vandalia, Illinois.

FULL-TIME JOB BEFORE FINISHING COURSE

"After completing about two-thirds of my Course I entered a Radio Repair shop. Later I branched out for myself and opened a shop in my own home. I am much pleased with the work I had during my first year of business."—A. H. AYERS, Washington 16, D. C.

by Practicing in Spare Time

I Send You Big Kits of Radio Parts



YOU BUILD Vacuum Tube Power Pack; make changes which give you experience with packs of many kinds. Learn how to correct Power Pack troubles.



YOU BUILD this A. M. Signal Generator for more valuable experience. It provides amplitude-modulated signals for many tests and experiments.



YOU PRACTICE FM (Frequency Modulation) experiments, get more experience with this Superheterodyne Receiver Circuit you build with parts I send.

KNOW RADIO

Win Success

I Will Train You at Home

Want a good-pay job in the fast-growing Radio and Television-Electronics industries? Want to be boss of your own money-making Radio shop? I've trained hundreds of men *with no previous experience* to be Radio technicians. I can do the same for you! My train-at-home method gives you practical experience with BIG KITS OF PARTS I send. You get Radio and Television principles from easy illustrated lessons. All equipment yours to keep.

VETERANS

You Can Get This Training Under G. I. Bill. Mail Coupon.

Make EXTRA MONEY in Spare Time

The day you enroll, I send EXTRA MONEY booklets. Use your know-how to make EXTRA MONEY fixing Radios in spare time. The next step is your own Radio shop or a good-pay Radio job.

N.R.I.—Trained Men Face Bright Future

Think of money-making opportunities in Police, Aviation, Marine Radio, Broadcasting, Radio Manufacturing, Radio Repairing, Public Address work . . . think of even greater opportunities in booming Television, FM, Electronic fields!

Our 34th Year of Training Men for Success in Radio

See What N.R.I. Can Do For You

My special DOUBLE FREE OFFER gives you actual lesson on Radio repairing short-cuts absolutely free. You also get my 64-page book, "HOW TO BE A SUCCESS IN RADIO-TELEVISION-ELECTRONICS." See how quicky, easily you can get started. Send NOW! J. E. SMITH, Pres., Dept. 8JP3, National Radio Institute, *Pioneer Home Study Radio School*, Washington 9, D. C.

SAMPLE LESSON FREE Gives hints on Receiver servicing, locating defects, repair of Loudspeaker, I. F. Transformer, Gang Turner, Condenser, etc. Mail coupon.

My Radio Course Includes

TELEVISION • ELECTRONICS
FREQUENCY MODULATION

Good for Both—FREE

MR. J. E. SMITH, Pres., Dept. 8JP3
National Radio Institute, Washington 9, D. C.

Mail me FREE, your Sample Lesson and 64-page book. (No salesman will call. Please write plainly.)

Name.....Age.....

Address.....

City.....Zone.....State.....

☐ Check If Veteran

Approved for Training under GI Bill

KNOWLEDGE
THAT HAS
ENDURED WITH THE
PYRAMIDS

A SECRET METHOD FOR THE MASTERY OF LIFE

WHENCE came the knowledge that built the Pyramids and the mighty Temples of the Pharaohs? Civilization began in the Nile Valley centuries ago. Where did its first builders acquire their astounding wisdom that started man on his upward climb? Beginning with naught they overcame nature's forces and gave the world its first sciences and arts. Did their knowledge come from a race now submerged beneath the sea, or were they touched with Infinite inspiration? From what concealed source came the wisdom that produced such characters as Amenhotep IV, Leonardo da Vinci, Isaac Newton, and a host of others?

Today it is known that they discovered and learned to interpret certain *Secret Methods* for the development of their inner power of mind. They learned to command the inner forces within their own beings, and to master life. This secret art of living has been preserved and handed down throughout the ages. Today it is extended to those who dare to use its profound principles to meet and solve the problems of life in these complex times.

AMENHOTEP IV
Founder of Egypt's
Mystery Schools

This Sealed Book—FREE

Has life brought you that personal satisfaction, the sense of achievement and happiness that you desire? If not, it is your duty to yourself to learn about this rational method of applying natural laws for the mastery of life. To the thoughtful person it is obvious that everyone cannot be entrusted with an intimate knowledge of the mysteries of life, for everyone is not capable of properly using it. But if you are one of those possessed of a true desire to forge ahead and wish to make use of the subtle influences of life, the Rosicrucians (not a religious organization) will send you A Sealed Book of explanation without obligation. This Sealed Book tells how you, in the privacy of your own home, without interference with your personal affairs or manner of living, may receive these secret teachings. Not weird or strange practices, but a rational application of the basic laws of life. Use the coupon, and obtain your complimentary copy.

Use this coupon for **FREE** *copy of book*

SCRIBE H.Q.R.
The Rosicrucians (AMORC)
San Jose, California

Please send free copy of Sealed Book, which I shall read as directed.

NAME_____

ADDRESS_____

CITY_____

The ROSICRUCIANS
SAN JOSE (AMORC) CALIFORNIA

Prepare for Success Quickly . . . in the

GREAT SHOPS OF COYNE

Conditions today are different. Many "one-operation" jobs that pay well will not last. Plan for steady pay and advancement by training NOW. Come to the great shops of COYNE in Chicago, for "all-around" training in **Electricity or Radio-Television**—the 2 great opportunity fields.

NOT "HOME-STUDY" COURSES

Our famous **"Learn-by-Doing"** method gives you practical experience on a massive outlay of equipment. Not by correspondence, but actual shop work plus necessary theory. You are trained right here in the great **Coyne** shops that has been training men and young men for over 49 years.

ELECTRICITY

INCLUDING INDUSTRIAL ELECTRONICS

Big future in Power Plant Work, Motors, Armature Winding, Home and Factory Wiring, Appliances, Refrigeration, Maintenance, Illumination, etc. Electricians are in demand everywhere —lifetime job service to Coyne graduates. Send for BIG FREE BOOK.

RADIO TELEVISION and F.M.

A great field now, even greater growth ahead. Here at COYNE you're trained for Construction, Testing, Trouble-Shooting on Radio, Public Address, Sound Picture Units. Training includes FM, Photo-cells, Television, etc. Our training is quick, easy, practical. Many **Coyne** trained men own well-paying radio businesses of their own.

LARGEST, OLDEST, BEST EQUIPPED SCHOOL OF ITS KIND IN THE U.S.

Pick Field You Like —Mail Coupon for Big FREE Book

Whether you prefer Electricity, or Radio, train on actual equipment, at **Coyne.** We have a big, fully illustrated book on each course, and we'll send you the one you want, without obligation. Mail coupon — TODAY.

ELECTRIC REFRIGERATION

Added training in Electrical Refrigeration now included with either our Electrical or Radio Course.

NON-VETERANS who are short of cash can finance most of their tuition and pay in easy monthly payments after graduation. Many earn while learning.

VETERANS

COYNE is authorized to train those who qualify for training under G. I. Bill of Rights. Coupon brings Special G.I. Bulletin.

COYNE Founded 1899 B. W. COOKE, President **ELECTRICAL AND RADIO SCHOOL**

500 So. Paulina Street, Dept. 68-73H, CHICAGO 12, ILL.

B. W. COOKE, President
COYNE ELECTRICAL AND RADIO SCHOOL
500 S. Paulina St., Dept. 68-73H, Chicago 12, Ill.

Send me your BIG FREE BOOK — for the course checked below. This does not obligate me and no salesman will call.

☐ ELECTRICITY ☐ RADIO — TELEVISION

NAME.....

ADDRESS.....

CITY.....STATE.....

I Put You to Work with Your Hands to LEARN RADIO! You Build Receivers! You Make Typical Defects Occur and Make Tests to Prove the Theory!

LEARN RADIO to MAKE MONEY!

LOW COST TRAINING — EASY PAYMENT PLAN!

F. L. SPRAYBERRY, PRESIDENT of the SPRAYBERRY ACADEMY OF RADIO. This is the man who directs your study. His years of experience and Radio "know-how" assure you of the finest in home Radio Training!

YOU GET 8 BIG KITS OF RADIO PARTS & EQUIPMENT including 2-BAND SUPER RECEIVER! and 16 RANGE METER FOR TESTING

You Learn at Home How to Build and Test Dozens and Dozens of Circuits — Simple and Complex!

YOU DO OVER 175 INSTRUCTIVE EXPERIMENTS

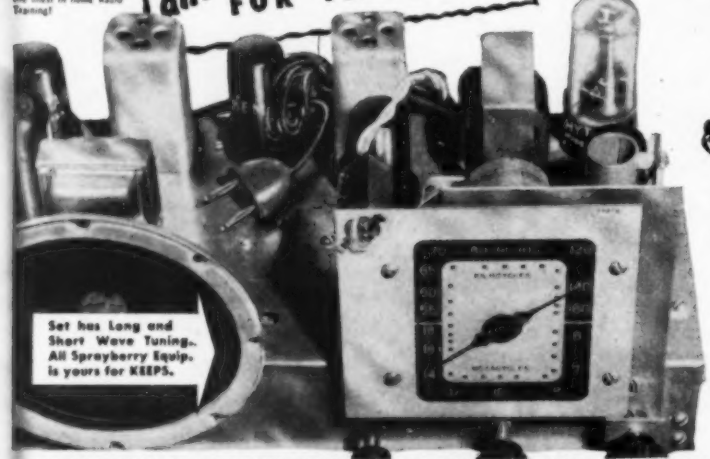

Set has Long and Short Wave Tuning. All Sprayberry Equip. is yours for KEEPS.

YOU BUILD ALL THESE TESTERS ..... AND MORE!

I give you a fine, moving-coil type Meter Instrument on Jewel Bearings — with parts for a complete Analyzer Circuit Continuity Tester. You learn how to check and correct Receiver defects with professional speed and accuracy.

You'll get valuable experience and practice building this Signal Generator and multi-purpose Tester. Makes a breeze out of fixing Radios and you don't have to spend money on ready-made Equipment.

Soldering, wiring, connecting Radio parts . . . building circuits with your own hands — you can't beat this method of learning. When you construct this Rectifier and Filter, Resistor and Condenser Tester, etc., you get a really practical slant on Radio that leads to a money-making future.

SPRAYBERRY HOME TRAINING is PLANNED to MAKE MONEY for you FAST!

I train you with regular professional Radio Equipment. I tell you exactly what to do . . . how to do it. You handle Radio Parts, see them operate, learn what they're for. With the fine Kits I supply, you learn how to build Radio Circuits, construct your own Test Equipment. I'll show you how to cause typical Radio defects so you can watch and see how they act. You learn the latest methods for trouble-shooting and repair. All this adds up to the finest kind of "bench" experience. And you get it right in your own home. In no time at all, you'll be ready for a business of your own or a good job in Radio, FM, Television, Radar, Industrial Electronics, etc. Now's the time to get started!

READ WHAT GRADUATE SAYS:

"One Job Nets About $26.00" . . . "Since last week I fixed 7 radios, all good-paying jobs, and right now I am working on an amplifier system. This job alone will net me about $26.00. As long as my work keeps coming in this way, I have only one word to say and that is 'Thanks' to my Sprayberry training and I am not afraid to boast about it." ADRIEN BENJAMIN, North Grosvenordale, Conn.

SEND FOR MY VALUABLE FREE BOOKS!

"How To Read Radio Diagrams and Symbols"

A wonderfully complete new book, which explains in simple English how to read and understand any Radio Set Diagram. Includes translation of all Radio symbols. Send for this volume at once! It's free! With it I'll send you another Big Free Book, describing in detail my Radio Electronic Training!

SPRAYBERRY ACADEMY OF RADIO
F. L. Sprayberry, President
Room 5598 Sprayberry Building, Pueblo, Colorado

Please rush my FREE copies of "How to MAKE MONEY in RADIO, ELECTRONICS and TELEVISION" and "How to READ RADIO DIAGRAMS and SYMBOLS."

Name _____ Age _____

Address _____

City _____ State _____

(Mail in envelope or paste on penny postcard)

INVENTORS

Learn how to protect your invention. The U. S. Patent Laws provide that any new and useful art, machine, article of manufacture, or composition of matter, or any new and useful improvement thereof, may be patented if the act of invention is involved. Therefore, every inventor with a valuable invention should take advantage of the Patent Laws and proceed for patent protection in order to safeguard his rights.

A patent gives the inventor the exclusive right to prevent others from making, using, or selling the invention claimed in the patent for a period of seventeen years.

The Patent Laws were enacted for the benefit of the inventor to give him protection for the features of his invention which are patentable. These features must be properly and concisely set forth and claimed in a formal application for patent, in order to comply with the requirements of the Patent Laws. For that reason, unless the inventor is familiar with patent matters, he should engage a competent registered patent attorney or agent to represent him. We are registered to practice before the U. S. Patent Office and are prepared to serve you in the handling of your patent matters.

A specially prepared booklet entitled "Patent Guide for the Inventor", containing detailed information with respect to patent protection and procedure, together with a "Record of Invention" form will be promptly forwarded to you without obligation upon request.

CLARENCE A. O'BRIEN & HARVEY JACOBSON

Registered Patent Attorneys

82-J DISTRICT NATIONAL BUILDING • WASHINGTON 5, D. C.

Patents

Trademarks

Copyrights

CLARENCE A. O'BRIEN & HARVEY JACOBSON
Registered Patent Attorneys
82-J District National Bldg., Washington 5, D. C.
Please send me copy of "Patent Guide for the Inventor" and also "Record of Invention" form. This request does not obligate me.

Name_____

Address_____

City_____ State_____
(Please write or print plainly.)

BE A CLERK
all my life?
NOT ME!!

Of course you say you won't.

But you may be unless you do something about it.

Hoping and wishing won't get you a better job and more money.

You must prepare for that step ahead—be ready to make promotion come.

We have helped thousands of ambitious men and women get ahead in the business world—perhaps we can help you.

At least you should investigate. It may be the turning point in your life to a better job and more money. So send the coupon without delay. Check the field of your choice and we'll send you without obligation the requirements and opportunities in that field—plus "Ten Years' Promotion in One"—a book which has helped many men.

LASALLE EXTENSION UNIVERSITY
A Correspondence Institution
Dept. 983R Chicago 5, Ill.

LASALLE Extension University
A Correspondence Institution

417 S. Dearborn St., Dept 983-R Chicago 5, Ill.

I want to know whether you can help me get ahead in the field I have checked below. Send free 48-page booklet and full information about your home-study training—plus "Ten Years' Promotion in One."

- ☐ Higher Accountancy
- ☐ C.P.A. Coaching
- ☐ Bookkeeping
- ☐ Law: LL.B. Degree
- ☐ Business Management
- ☐ Salesmanship
- ☐ Traffic Management
- ☐ Foremanship
- ☐ Industrial Management
- ☐ Stenotypy (Machine Shorthand)

Name..... *Age*.....

Address.....

City..... *Zone*..... *State*.....

Letters

Keep Right On Trying

Sir:

For the past few months, I have been trying to find a very technical mistake in your magazine, so that my letter might be with those printed in the magazine.

In the July, 1948 issue I found a mistake on page 86 ["The Inside Story of the New Ford"] in the picture on the lower right hand corner. The speedometer shows that the car has gone ½ mile. The gas gauge shows nothing, probably because the ignition is off. The oil is o.k. and the battery is o.k. . . . but the temperature shows the car as being extremely hot. How come?

WALLY HERMAN

Los Angeles, Calif.

This one shouldn't have fooled you. It's the same thing that happens in the Lincoln. When the ignition is turned off, the temperature-indicating needle falls over to the hot side of the gauge.

Condon—Pro and Con

Sir:

I want to congratulate you and PS for the editorial in the June issue. You are one of the few editors of popular literature in this country honest enough with yourself to warn the public of the dangers which free science faces today in the United States.

I am majoring in chemistry here at Lehigh and I had begun wondering if it were worthwhile continuing my studies, with American scientists, even those not engaged in secret work, being investigated and intimidated as they are today.

Your editorial, giving me evidence that all Americans are not blind to the danger, has given me new hope. Thanks again for a great editorial.

HENRY GATES

Bethlehem, Pa.

Sir:

The letter [Editorial, June '48, p. 71] in the current issue of PS isn't a very smart letter. It sounds very much like preorganization blather of a CIO drive and a *Daily Worker* editorial.

Because Condon is a Doctor of Science

INVENTORS

Patent laws encourage the development of inventions.

We recommend that an inventor employ a registered Patent Attorney or agent, if the inventor is not familiar with patent matters. This is because the value of a patent depends largely upon the skillful preparation of the specification and claims in the patent application.

The firm of McMorrow, Berman and Davidson is registered to practice before the United States Patent Office. Additionally it engages patent attorneys able to readily understand inventors' disclosures, to advise concerning patentability, and to prepare appropriate specifications and claims.

If an inventor believes he has an invention, a search of the most pertinent prior U. S. patents should be made and a report obtained relative to its patentability. Where such report indicates that the invention appears patentable, in order to secure protection, diligence should be exercised in making application for a patent.

Send for a copy of Patent Booklet entitled "How To Protect Your Invention." This booklet contains information on patent protection and procedure. You will also receive an "Invention Record" blank. This will be promptly forwarded to you upon request—no obligation.

McMORROW, BERMAN & DAVIDSON

Registered Patent Attorneys

PATENTS • TRADE MARKS • COPYRIGHTS

142-M VICTOR BUILDING, WASHINGTON 1, D. C.

McMORROW, BERMAN & DAVIDSON

Registered Patent Attorneys

142-M Victor Building, Washington 1, D. C.

Send me your Patent Booklet, "How To Protect Your Invention", and also "Invention Record" form at once. I understand this request does not obligate me.

Name.....

Address.....

City.....

(WRITE OR PRINT NAME CLEARLY)

DIESEL OPERATING ENGINEERS and MECHANICS ARE in DEMAND

Train at Home in Spare Time

OR **in HEMPHILL SCHOOL'S shops in New York, Memphis and Los Angeles**



Get your copy of the book "MARCH OF DIESEL"

It shows you in pictures and words the great and growing Diesel Industry with its many opportunities for trained men.

HEMPHILL TRAINED MEN KNOW DIESEL

America's oldest and largest Diesel schools have many graduates successfully employed or in own businesses. In construction, farming, marine, oil, power plant and other industries using Diesel engines, you'll find Hemphill trained men.

GET INTO DIESEL

REMEMBER—In a national emergency, trained Diesel men, and those in training, will be in a favored position to render an important service to our nation.

APPROVED FOR VETERANS—NON-VETERANS
CLIP AND MAIL COUPON TODAY!

HEMPHILL DIESEL AND AUTOMOTIVE SCHOOLS
1601 S. WESTERN AVE., DEPT. PS-98, LOS ANGELES 6, CALIF.

Gentlemen: Please send me FREE BOOKLET and information on your Diesel Courses. Home Study ☐ Shop Training ☐ at

New York (31-28 Queens Blvd., L. I. City, N. Y.) ☐

Memphis, Tenn. (311 S. Main St.) ☐ Los Angeles ☐

NAME _____ AGE _____

STREET _____ ZONE _____

CITY _____ STATE _____

VETERAN _____ NON-VETERAN _____

doesn't make him sacrosanct and as a government employee who has, to be charitable, been indiscreet he should be investigated.

Just a little word of advice:

Don't let any well informed, non-scientific person hear you call the Condon investigation a smear or they will laugh in your face. . . .

ART BLUM

Waterford, N. Y.

The U. S. Atomic Energy Commission, after a new investigation of Dr. Condon under its security standards, has since described his loyalty as "unquestionable" and continued his clearance for handling restricted information on atomic research.

Answer from the Alps

Sir:

I take the liberty of sending you from here in Switzerland an example of mustard in a tube [shown below], described in Popular Science, April 1948, page 110 ["I'd like to See Them Make"] "Mustard in Tubes."

HUGO MARTHALER

Lucerne, Switzerland.



More About Cosmic Rays

Sir:

I am very intrigued by one part of your article "You Can't Escape Cosmic Rays" in the July issue. In the article you state that the neutrino is one of the two ultimate residual particles of a decayed meson. . . . When was this primordial particle discovered, by whom, who named it, and where can I obtain further information about it?

M. E. SHERMAN

Des Moines, Iowa

The neutrino was invented, rather than discovered, by W. Pauli, and named by Enrico Fermi. No one has ever seen or meas-

(Continued on page 22)

INVENTORS

A patent is a valuable right. On the basis of a constitutional provision Congress has established a system under which inventors may secure the exclusive right to prevent the unauthorized use, manufacture and sale of their inventions for periods of seventeen years. The inventor secures this protection by obtaining a patent.

Unless an inventor is thoroughly familiar with such matters, he is advised to employ a competent registered patent attorney, as the value of patents depends largely upon the skillful preparation of the specification and claims.

We recommend that you authorize us to conduct a search through the United States patents pertinent to your invention and to submit a report setting forth our opinion with respect to its patentability.

This firm is registered to practice before the U. S. Patent Office and is available to assist inventors in the preparation and prosecution of their cases. Detailed information and the preliminary steps to take to obtain patent protection will be furnished upon request. *Form below for mailing convenience.*

VICTOR J. EVANS & Co. *Merlin M. Evans* REGISTERED PATENT ATTORNEY

340-K MERLIN BUILDING, WASHINGTON 6, D. C.

Please send me without obligation a copy of your booklet "Patent Protection For Inventors" together with your convenient "Evidence of Invention" form.

Name.....

Address.....

City and State.....

PATENTS TRADEMARKS COPYRIGHTS

NOW-YOU CAN GET

BIG MONEY FOR LITTLE IDEAS

CRYING NEED FOR 2100 INVENTIONS

BIG money waiting for people with ideas for new inventions, improvements, novelties! Thousands of manufacturers looking for new products to meet hundreds of post-war demands. YOU can cash in—if you KNOW which inventions are really needed!

It's often the *littlest* things that make the *biggest* money! The rubber pencil tip, ordinary paper clip, clamp fruit-jar top made fortunes for their inventors. The Kiddie Kar brought a cool million. A 70-year-old grandmother made $350,000 with an overall buckle idea.

This Book Will Get You Started

Don't waste time and work on something nobody wants! The big secret is in *knowing WHAT to invent!* That's just what this book gives you. Its author, Raymond F. Yates, noted science editor and inventor, lists and describes over 2100 PRACTICAL, money-making ideas that are crying aloud to be invented!

These 2100 needed inventions are the things *most needed* and *surest to make money* in EVERY field. For quick reference, you get them under 34 different headings: Electrical, Radio, Automotive, Agricultural, Mechanical, Building, Household, Clothing, Food, Toys, Time-Savers, etc., etc.

This book ALSO tells how to think inventively; how to PROTECT your ideas; how to develop an invention STEP-BY-STEP; the most needed inventions in *everyday* life, etc.

FREE EXAMINATION OFFER

See for yourself what this amazing book can do for you. It doesn't cost a penny to find out! Simply mail coupon below without money—now. The book will be sent to you for 5 days' FREE examination. If you're not convinced that it's jam-packed with money-making ideas for YOU, return it in 5 days, pay nothing. Otherwise send only $2.50, plus few cents actual postage, as payment in full.

Would YOU like a slice of the $280,000,000 in royalties that is paid out to American inventors every year? Then you owe it to yourself to get started with this book NOW! Don't break your heart working on things that there's no eagerly-waiting market for! Any ONE of the 2100 "self-starting" ideas fully described in this great book will bring somebody a fortune—and it may as well be YOU! So mail coupon at once! WILFRED FUNK,™ Inc., Publishers, Dept. T599, 227 East 44 Street, New York 17, N. Y.

FREE 5-DAY EXAMINATION

WILFRED FUNK, Inc., Publishers, Dept. T599
227 East 44 Street, New York 17, N. Y.

Please send me 2100 NEEDED INVENTIONS for FREE EXAMINATION. If I keep the book I will send you $2.50 plus few cents actual postage. Otherwise I will return it within 5 days, without further obligation.

Name .....

Address .....

Zone No.

City ..... (if any) ..... State .....

☐ Check here if enclosing $2.50 WITH this coupon, and we will pay all postage charges. Same 5-day return privilege, for full refund, applies. (Canadian Orders—25c extra for carrying charges. Only U. S. currency accepted.)

WALKIE-TALKIES!

Radio Telephone Sends And Receives Several Miles

This is the light weight battery-operated radio that was used so successfully by the Army. One knob tunes both transmitter and receiver. Sends and receives merely by pushing a button. Recommended for amateurs, explorers, police and Government services, etc. Shipped ready to operate, complete with tubes, telephone handset, telescoping antenna, and new batteries. Rebuilt by the Government and guaranteed. Price only **$45.00** each or **$90.00** per pair F. O. B. Chicago.

Extra Batteries (80 hours continuous service) $4.75 each.

Parts and Accessories for Walkie Talkies

We maintain complete stocks of replacement parts, batteries, antennas, chassis, etc., for Army Walkie Talkies and Handie Talkies. Write for Special Listing No. 20.

WELLS SALES, INC. 320 N. La Salle St., Dept. WT Chicago 10, Illinois

HEATHKIT 3-TUBE

ALL-WAVE RADIO

110-volt A.C. operation

$8.75

An ideal way to learn radio. This kit is complete ready to assemble, with tubes and all other parts. Operates from AC ..... Simple, clear detailed instructions make this a good radio training course. Covers regular broadcasts and short wave bands. Plug-in coils. Regenerative circuit. Operates loud speaker. Add postage for 3 lbs.

Headphones per set $1.00
2½" permanent magnet loudspeaker $1.95

INTERPHONE

2-WAY CALL SYSTEM KIT

Ideal call and communication system for homes, offices, factories, stores, etc. Makes excellent electronic baby watcher, easy to assemble with every part supplied including simple instructions. Distance up to 1/5 mile. Operates from 110-V A.C. 3 tubes, one master and one remote speaker. Shipping Wt. 5 lbs.

$14.50

HOME WORKSHOP GRINDER

$3.95

Easily assembled 110V AC or DC ball bearing fully enclosed motor from Army surplus dynamotor. Purchaser to make simple changes and shaft extensions, detailed instructions and all parts supplied. Motor approximately 1/30 H.P., 5,000 R.P.M. Ideal for tool-post grinder, flexible shaft tool, model drill press, saw. Shipping wt. 6 lbs.

HEATH CO. DEPT. S BENTON HARBOR, MICH.

Arthur Godfrey says:

"I.C.S. made the impossible—easy!"

YOU'VE often heard Arthur Godfrey, famed "Huck Finn of Radio," now winning new renown with his coast-to-coast "Talent Scouts" and other CBS programs. But this is the first time you've heard the star on the subject of I. C. S.:

> *"I had to quit high school before the end of my second year. Later in life, at the U. S. Naval Materiel School at Bellevue, D. C., I had to master a working knowledge of math, all the way from simple decimals and fractions through trigonometry, in the first six weeks or be dropped from the course. So I took an I. C. S. Course and finished at the head of the class! I. C. S. made the impossible—easy!"*

As usual, the former Navy radio operator and present Lt. Commander in the U. S. Naval Reserve knows what he's talking about. As an I. C. S. graduate, Mr. Godfrey is in the best of all positions to tell you about the educational system that's served so long as talent scout for American industry.

Study his statement. Then mark your interest on the coupon and mail it today for full information on what I. C. S. can do for *you!*

INTERNATIONAL CORRESPONDENCE SCHOOLS

ICS

BOX 7614-M, SCRANTON 9, PENNA.

Without cost or obligation, please send me full particulars about the course *before* which I have marked X:

Air Conditioning and Plumbing Courses
- ☐ Air Conditioning
- ☐ Heating ☐ Plumbing
- ☐ Refrigeration ☐ Steam Fitting

Chemistry Courses
- ☐ Chemical Engineering
- ☐ Chemistry, Analytical
- ☐ Chemistry, Industrial
- ☐ Chemistry, Mfg. Iron & Steel
- ☐ Petroleum Refining ☐ Plastics
- ☐ Pulp and Paper Making

Civil Engineering, Architectural and Mining Courses
- ☐ Architectural Drafting
- ☐ Architecture
- ☐ Bridge and Building Foreman
- ☐ Building Estimating
- ☐ Civil Engineering
- ☐ Coal Mining
- ☐ Contracting and Building
- ☐ Highway Engineering
- ☐ Lumber Dealer
- ☐ Reading Structural Blueprints
- ☐ Sanitary Engineering
- ☐ Structural Drafting
- ☐ Structural Engineering
- ☐ Surveying and Mapping

Communications Courses
- ☐ Electronics
- ☐ Practical Telephony
- ☐ Radio, General
- ☐ Radio Operating
- ☐ Radio Servicing
- ☐ Telegraph Engineering

Electrical Courses
- ☐ Electrical Drafting
- ☐ Electrical Engineering
- ☐ Electric Light and Power
- ☐ Lighting Technician
- ☐ Practical Electrician

Internal Combustion Engines Courses
- ☐ Auto Technician ☐ Aviation
- ☐ Diesel-Electric
- ☐ Diesel Engines ☐ Gas Engines

Mechanical Courses
- ☐ Aeronautical Engineering
- ☐ Aircraft Drafting
- ☐ Flight Engineer
- ☐ Foundry Work
- ☐ Heat Treatment of Metals
- ☐ Industrial Engineering
- ☐ Industrial Metallurgy
- ☐ Machine Shop
- ☐ Mechanical Drafting
- ☐ Mechanical Engineering
- ☐ Mold-Loft Work
- ☐ Patternmaking—Wood, Metal
- ☐ Reading Shop Blueprints
- ☐ Sheet-Metal Drafting
- ☐ Sheet-Metal Worker
- ☐ Ship Drafting ☐ Ship Fitting
- ☐ Tool Designing
- ☐ Toolmaking
- ☐ Welding—Gas and Electric

Railroad Courses
- ☐ Air Brake ☐ Car Inspector
- ☐ Diesel Locomotive
- ☐ Locomotive Engineer
- ☐ Locomotive Fireman
- ☐ Railroad Section Foreman

Steam Engineering Courses
- ☐ Boilermaking
- ☐ Combustion Engineering
- ☐ Engine Running
- ☐ Marine Engineering
- ☐ Steam Electric ☐ Steam Engines

Textile Courses
- ☐ Cotton Manufacturing
- ☐ Rayon Weaving
- ☐ Textile Designing
- ☐ Woolen Manufacturing

Business and Academic Courses
- ☐ Accounting ☐ Advertising
- ☐ Arithmetic ☐ Bookkeeping
- ☐ Business Correspondence
- ☐ Business Management
- ☐ Certified Public Accounting
- ☐ Commercial
- ☐ Cost Accounting
- ☐ Federal Tax
- ☐ First Year College
- ☐ Foremanship ☐ French
- ☐ Good English ☐ High School
- ☐ Higher Mathematics
- ☐ Illustrating ☐ Motor Traffic
- ☐ Postal Service
- ☐ Salesmanship ☐ Secretarial
- ☐ Sign Lettering
- ☐ Spanish ☐ Stenography
- ☐ Traffic Management

Name _____ *Age* _____ *Address* _____ *Home*

City _____ *State* _____ *Present Position* _____

Working Hours _____ *A.M. to* _____ *P.M.* **Length of Service in World War II** _____

Special tuition rates to members of the Armed Forces. Enrollment under the G.I. Bill of Rights approved for War II Veterans. Canadian residents send coupon to International Correspondence Schools Canadian, Ltd., Montreal, Canada.

GROBAN'S SURPLUS BARGAINS!

WESTINGHOUSE AIR COMPRESSOR

Brand New

War Surplus Bargain Special!

2 CYLINDER PISTON TYPE

IDEAL FOR

- Paint Spraying
- Industrial Uses
- Tire Inflating
- Spraying Insecticide
- Operating Air Tools



FOR THE HOME... FARM... FACTORY.

Designed for automotive truck or tractor mounting. Can be run off fan belt or power takeoff. Comes with automatic clutch. Can be installed for use on: farm trucks, jeeps, tractors tire or garage service trucks, contractor or road building machinery, pneumatic devices, etc.

Can be operated with ½ H.P. or more electric motor or equivalent portable gas engine.

Light weight, compact and versatile unit . . . delivers "oil free air" . . . simple in operation; requires minimum of maintenance; operates under all climatic conditions; suggested operating pressure 75 P.S.I.; equally efficient operation in either direction of rotation; approx. displacement 3.27 CFM at 600 RPM, 6.54 CFM displacement at 1200 RPM; 2" Bore—1½" Stroke. Overall dimensions: width 9", height 11⅞", depth 6⅝"; approx. wt. 23 lbs.

A REAL BUY . . . worth many times this price.... $26.95 F.O.B. Chicago

Send check or money order today.

SATISFACTION GUARANTEED.

37 Piece Manganese Bronze

LETTER STAMPING KIT

BRAND NEW

5/16" letters, 2½" length, can be used hot or cold—ideal for stamping or burning lettering on leather, wood, plastic and soft metals such as aluminum, lead, copper, brass, etc. Complete alphabet, numbers and punctuation. Available in veneer fitted case. Excellent for marking, identifying and stamping. Worth many times this unsurpassed price of ..... $6.95 Prepaid in U.S.

CLUTCH with UNIVERSAL JOINT

BRAND NEW

Formerly used on Amphibious Jeeps. Has 5 inch ball bearing pulley. Used on garden tractors, midget cars, lawn mowers, etc. Can be used for power take-off with winch and hoist. Ship. wt. 8 lbs. ONLY..... $4.95 F.O.B. Chicago

Worth a lot more!

GROBAN SUPPLY CO.

DEPT. PS-9 1507 S. MICHIGAN AVE., CHICAGO 5, ILLINOIS

ured a neutrino, but if it doesn't exist, something is apparently very wrong with the laws of conservation of energy and momentum. According to present theories, the neutrino is a very small particle, neutral in charge and weighing less than 1/20 as much as an electron. For further information see "Elementary Nuclear Theory" by H. A. Bethe (John Wiley & Sons, $2.50).

Sir:

I would like an explanation of the sentence that states, "The proton in the cloud chamber curves in the direction of positive charge. . . ." I was taught that "like charges repel and unlike charges attract."

NICK RESTAINO

Cresson, Pa.

The curved track a proton makes in a cloud chamber is caused by a magnetic field, not by other electric charges. The direction this track takes in the magnetic field indicates that the proton carries a positive electrical charge.

Sir:

I was led to believe that Einstein's quantum theory stated that photons were emitted from the shells of planetary electrons. However, you state that they come from the nucleus. Would you please inform me as to what the accepted theory is?

DONALD GLEASON

Brooklyn, N. Y.

"Photon" is a general name for the small unit, or package, of light energy and applies to all light regardless of its wave length or where it comes from. Photons of ordinary visible and ultraviolet light are emitted from the outer shell of planetary electrons. X-ray photons, of shorter wave length, come from the inner electron shells. Gamma-ray photons (those referred to in "You Can't Escape Cosmic Rays") have still shorter wave lengths and are emitted from the nucleus of the atom.

Cars Race on Orange Juice

MIDGET autos are racing on a tankful of orange juice at Culver City Speedway, in Calif. The juice is distilled from cull oranges and refined into alcohol for use as fuel.

Electric Lights Vs. Candles

SWITCHING on one 100-watt light bulb will brighten a room as much as lighting 129 candles.

GROBAN'S SURPLUS BARGAINS!

BRAND NEW

AIR OR OIL HYDRAULICS

Use hydraulics on arbor presses, hydraulic presses, hay lifts, manure loaders, lift trucks—push or pull, tilt or turn, press or squeeze, open or close, lift or lower—and other hydraulic and industrial applications. Use with either air or oil ... of finest precision workmanship.

1. Use these cylinders on farm trucks, bulldozers, hay lifts, manure loaders, etc. Double action, 1½" bore, 27" stroke. (Will lift 1760 lbs. in 2 seconds with Vickers Pump). Wt. 8 lbs. A $55.00 hydraulic cylinder value for only **$12.95** postpaid

2. Double action, 2¾" bore, 8" stroke. (Will lift 4400 lbs. in one second with Vickers Pump). Will withstand 1500 P.S.I. against wall. Wt. 7 lbs. A $65.00 value. available now at..... **$14.50** postpaid

3. Double action, 3" bore, 12" stroke. All steel hydraulic cylinder, will lift up to 12,000 lbs. (7000 lbs. in 3 seconds with Vickers Pump). Complete with fittings. Wt. 12 lbs. $78.00 value..... **$19.50** postpaid

4. Double action, 3½" bore, 11" stroke, will lift 9600 lbs. in 2 seconds using Vickers MF6 Pump. Complete with fittings. A $92.00 value. Wt. 15 lbs..... **$22.50** postpaid

Brand New HYDRAULIC CONTROL VALVES

Outlets are standard ½" pipe thread and inlet takes standard ¼" copper tubing fitting.

1. Four-way control valve for use with double action hydraulic cylinder, may be used with 1500 P.S.I. hydraulic system to open and close hydraulic cylinders. Brand new. Ship. wt. 4 lbs. $38.00 value..... **$7.95** postpaid

2. Four-way control valve for use with two hydraulic double action cylinders. Each cylinder may be operated independently of the other or in conjunction with the other. Oil may be locked in any of the cylinders to hold the piston at any required position. Brand New. Ship. Wt. 6 lbs. A $60.00 value..... **$10.95** postpaid

3. Same as valve item 2, except that unit is designed for three double action cylinders. Brand New. Ship. Wt. 8 lbs. A $72.00 value..... **$12.95** postpaid

4. A two cylinder double action valve with a unique arrangement, allowing the operator to raise both cylinders simultaneously, to lower them simultaneously or to raise one and lower the other at any predetermined rate and speed. Brand New. Ship. Wt. 8 lbs. A $75.00 value..... **$14.95** postpaid

VICKERS MF6 HYDRAULIC PUMP OR MOTOR

Compact, powerful, rated 1,000 P.S.I., .507 cu. in. per revolution, 8 gal. per min. at 3750 r.p.m. Change rotation by reversing flow. Delivers up to 6 H.P. BRAND NEW. Wt. 4½ lbs. $60.00 value for ..... **$14.95** Postpaid

VICKERS HEAVY DUTY HYDRAULIC PUMP

BRAND NEW

For tractors, bull-dozers, construction machinery, lift trucks, industrial applications, etc. Used on Ross Carriers. Delivers 18 gal. per minute at 1000 P.S.I. at 1200 R.P.M. using 10 H.P. Has 1½" intake; 1¼" outlet; threaded and keyed ¾" shaft for direct or pulley drive. Wt. 40 lbs. Dimensions: 5¾" diameter, 7½" high. Original value $148.00. NOW ..... **$39.50** F.O.B. Chicago

Self-Priming ELECTRIC PUMP



Compact brand new

Applications: oil burners, aquariums, fluid metering, fuel pump, tool post grinder, coolant pump, pressure lubricating pump, general industrial, etc.

Motor mfd. by Black & Decker; double ball bearing series wound, continuous duty, 1/30 H.P. electric motor, rated 12,000 R.P.M. Transformer included for use on 110 VAC current. Also applicable for 24-32 VDC.

Pump mfd. by Weldon Tool Co. with standard ¼" tubing ports; rated 2 G.P.H.; remove pump and use motor as high speed grinder.

Overall dimensions: 7¾" long x 3¼" wide x 3¼" high. Approx. wt. 3 lbs. $51.00 value.. **$12.95** Postpaid

ALL-PURPOSE WATER PUMP

BRAND NEW

Ready for use on any pumping need. Use it for:

DRAINING BASEMENTS • HOME WATER SYSTEMS • FIRE PROTECTION • PRESSURE BOOSTER • IRRIGATION • DRAINING PONDS, TANKS, etc. • SPRINKLING SYSTEMS • STOCK WATERING • INDUSTRIAL PUMPING •

Complete with pulley and mounting brackets, ready for use.

BELT DRIVEN Centrifugal Pump

An extraordinary value for all types of intermittent or continuous pumping in the home . . . farm . . . factory. Built to exact specifications of Packard Motor Car Co. for use in Rolls-Royce Merlin Aircraft Engines. May be run with electric motor, gas engine or power take-off on tractor. Delivers up to 25 gallons a minute with ¼ H.P. motor; 80 gal. a min. with one H.P. motor. Will deliver up to 44 ft. head or 25 ft. suction. Use 1" outlet hose; 1" or 1¼" inlet hose (recommended).

COMPLETE ENGINEERING REPORTS AND OPERATING INSTRUCTIONS FREE WITH PUMP

Has cast aluminum housing, accurately machined 5" bronze impeller; 3½" V belt pulley and mounting brackets. Shaft rotates on ball bearing; has grease gun fitting.

Original cost approx. $88.00. Shipping weight 10 lbs. A REAL BUY. SATISFACTION GUARANTEED. Mail orders filled promptly. **$21.50** F.O.B. Chicago

VACUUM-AIR HYDRAULIC GENERAL PURPOSE PUMP

Original Cost $45.00

Now Only $9.95

Prepaid in U. S. A.

BRAND NEW!

Use them for

OIL BURNERS — SPRAYING MACHINES — MILKING MACHINES — COMPRESSORS — VACUUM PUMPS — HYDRAULIC SYSTEMS — MANURE LOADERS — PRESSES, etc.

Worth Many Times This Low Sale Price

• Originally cost $45.00. May be used as air or fluid pump—for pressure or vacuum. Standard ¾ inch pipe thread with interchangeable ports. Will pump 7½ gal. SAE 30 oil per minute at 300 RPM. Builds air pressure of 30 lbs. per sq. in. at 1000 RPM. Vacuum will draw 26 inches of mercury at 1750 RPM. Develops up to 120 lbs. per sq. inch of hydraulic pressure, which in conjunction with a 3 inch hydraulic cylinder will lift 840 lbs. minimum. Runs forward or reverse. Self aligning shaft. Die cast aluminum housing 6x4x4 inches. Has stainless alloy steel vanes and impeller. Made by Bendix Avia. Corp. Spline terminal for direct drive—readily replaced with a pulley. Recommend a ¼ H.P. or stronger electric motor. Rated capacity 1500 RPM with high overload factor. Special price for quantity users. Complete illustrated engineering report and instruction booklet FREE with every pump. Send check or money order today! Postpaid in U.S.A. **$9.95**

GROBAN SUPPLY CO. DEPT. PS-9, 1507 S. MICHIGAN AVE., CHICAGO 5, ILL.

And to think they used to call me

SKINNY!

Give Me 15 Minutes a Day and I'll Give You a NEW BODY

PEOPLE used to laugh at my skinny 97 lb. body. I was ashamed to strip for sports or for a swim. Girls made fun of me behind my back. THEN I discovered my muscle-building system—*"Dynamic Tension."* It turned me into such a *complete* specimen of MANHOOD that today I hold the title "THE WORLD'S MOST PERFECTLY DEVELOPED MAN."

That's how I traded in my "bag of bones" for a barrel of muscle! And I felt so much on *top of the world* in my big new, husky body that I decided to devote my life to helping other fellows change themselves into "perfectly developed men."

What's My Secret?

When you look in the mirror and see a healthy, husky, strapping fellow smiling back at you—then you'll be astonished at how *short* a time it takes *"Dynamic Tension"* to GET RESULTS! *"Dynamic Tension"* is the easy, NATURAL method you can practice in the privacy of your own room—JUST 15 MINUTES EACH DAY—while your scrawny shoulder muscles begin to swell . . . those spindly arms and legs of yours bulge . . . and your whole body starts to feel "alive," full of zip and go!

Thousands are becoming marvelous physical specimens—my way. I give you no gadgets or contraptions to fool with. With *"Dynamic Tension"* you simply utilize the dormant muscle-power in your own body—watch it increase and multiply into real, solid LIVE MUSCLE.

FREE Book

Mail coupon right now for my illustrated book, "Everlasting Health and Strength." Tells all about my *"Dynamic Tension"* method. Shows actual photos of men I've made into Atlas Champions. It's a valuable book—and it's FREE. Mail coupon to me personally. CHARLES ATLAS, Dept. 1J, 115 East 23rd St., New York 10, N.Y.

CHARLES ATLAS, Dept. 1J.
115 East 23rd Street, New York 10, N. Y.

I want the proof that **"Dynamic Tension"** will help make a new man of me—give me a healthy, husky body and big muscle development. Send me your free book. "Everlasting Health and Strength."

Name_____ Age_____
(Please print or write plainly)

Address_____

City_____ State_____

Learn ELECTRIC MOTOR REPAIR

at home . . in spare time

Only $5 for the **COMPLETE TRAINING**
560 pages . . . 900 illustrations
Train for GOOD PAY in an uncrowded field

Based on what can be learned from this big **ELECTRIC MOTOR REPAIR** book you can train quickly for profitable repair, installation and maintenance service on practically any electric motor in common use! Explains motor trouble diagnosing, repair and complete motor rewinding. Covers A-C and D-C motors, synchronous motors and generators, etc., also all types of motor control systems. Quick reference guides show how to handle specific jobs. Contains over 900 special pictures and diagrams.

SEE BOOK ON TRIAL—NO MONEY DOWN

Just write name, address, and occupation plainly in margin and mail ad. We'll send book and after 10 days you can pay for it, plus few cents postage, or return it postpaid. (Postage paid on cash orders; same return guarantee.) Satisfy yourself. Write now.

Dept. PS-98, MURRAY HILL BOOKS, INC.
232 Madison Ave., New York 16, N. Y.

Learn to Write at Home in spare time

You can become a good **Business Writer,** and you can learn **Shaded Writing** also at home in spare time by my **Simplified Method,** without cost of going away to school. Write for my FREE BOOK, "How to Become an Expert Penman," which shows what others have learned. Send 10c for Special Penpoint and bird written on a card. Write TODAY.

Send for this FREE Book

T. M. TEVIS BOX 25R CHILLICOTHE, MO.

ELECTRICAL TRAINING

Intensive 32 weeks residence course in fundamentals of industrial electrical engineering, including radio, electronics. Prepares for technician, engineering aides. Approved for veteran training. 55th year. Enter Nov. 22, April 4. Write for catalog.

BLISS ELECTRICAL SCHOOL
7616 Takoma Ave., Wash. 12, D.C.

SCREWY-MIX BARGAINS

Handy Workshop Kits—All New Finest Quality

1—Assorted machine screws, sheet metal screws and bolts, sizes 2-56 to 3/8-24, various type heads. Three pounds $1.15. Five pounds $1.50.
2—Mixed Steel Rivets 1/16" to 1/4" diameter, various lengths round and flat heads—five pound pkg. $1.00.
3—Mixed aluminum rivets—50c lb. Mixed cotter pins 35c lb.

Minimum order one item $1.00—mixed items minimum $50. Add 15c postage per order.

JAY-CEE SALES CO., 4554 Grand River Ave., Detroit 8, Michigan

APTITUDE TESTS

discover the kind of work or studies best for your success! You get a personal report—a guide for life—more happiness—more prosperity. (for men, women, boys, girls.) Write for complete facts.

VOCATIONAL COUNSELING INSTITUTE
8057 Woodward Ave., Detroit 2, Michigan

Photography for PLEASURE or PROFIT

Learn at home. Spare time. Practical basic training. Long-established school. Many have earned while learning. Send coupon below for free booklet, "Opportunities in Modern Photography" and full particulars.

AMERICAN SCHOOL OF PHOTOGRAPHY
1315 Michigan Avenue Dept. 1366 Chicago 5, Illinois

Send booklet, "Opportunities in Modern Photography," full particulars and requirements. No salesman will call.

Name.....*Age*.....
Address.....
City.....*Zone*.....*State*.....

Do you want to:

1. Make Good Money?
2. Have a Real Job?
3. Build for Future Security?
4. Have Your Own Business?

THEN get the facts about

OUR GREATEST OFFER IN 17 YEARS . . . to help you learn TELEVISION.. RADIO..ELECTRONICS

IN YOUR OWN HOME

Here's good news...big news...our BIGGEST NEWS in 17 years. Now you get and keep many shipments of Radio-Electronic parts...work over 200 "Learn-By-Doing" Experiments...build and keep a quality 6-tube "Super" Receiver with Magic Tuning Eye... build and keep a commercial-type, jewel-bearing Multi-Meter . . . use fascinating, instructive HOME MOVIES to help you grasp important points faster, easier . . . get real Employment Service.

Mail coupon below. Get the complete story. See how we do BOTH—(1) Prepare, then (2) Help you get started in America's thrilling Radio-Television-Electronic field.

Using the many shipments of parts and assemblies (*left*), you build and keep this 6-tube "Superhet" Receiver and jewel-bearing Multi-Meter (*above*) to give you practical experience AT HOME in *ASSEMBLY...WIRING . . . SOLDERING . . . TESTING . . . TROUBLE SHOOTING!*

TRAIN IN CHICAGO LABS
If you prefer, you can get all of your training in our modern, well-equipped Chicago Laboratories. Write for all the details ...there is no obligation.

LEARN FASTER . . . EASIER

RIGHT: You receive the loan of a 16mm. Motion Picture Projector and many reels of "Learn-By-Seeing" film to speed your understanding of important points. You get this remarkably effective training aid ONLY from D.T.I.

DeFOREST'S TRAINING, INC.
CHICAGO, ILLINOIS
Associated with DeVry Corporation, Builders of Electronic and Movie Equipment

MAIL TODAY

DeForest's Training, Inc.
2533 N. Ashland Ave., Dept. PSE9
Chicago 14, Illinois

Send me complete details showing how I may make my start in Radio-Electronics-Television. No obligation.

Name_____ Age_____

Address_____ Apt._____

City_____ Zone_____ State_____

☐ If under 16, check here for special information.

☐ If a discharged veteran of World War II, check here.

YOUR KEY TO MORE MONEY

in electrical maintenance and repair work

WAS there ever such an opportunity to get started in electrical maintenance and repair—and at top-notch wages? Are you ready—with experience and ability—to cash in on it? Others are getting just the sort of background needed—quick! practical!—to handle the great variety of electrical maintenance and repair work TODAY—from this well-known electrical library. You can too!

THE LIBRARY OF ELECTRICAL MAINTENANCE AND REPAIR

5 vols., 1826 pages, 1724 illustrations

Gives you the "know-how" to tackle any wiring or motor job. Five books show you HOW—to install all types of motor and generator units—to inspect and repair motor starters and generators—to diagnose motor and generator troubles—to figure new windings for old cores—DC and AC windings—to test armature windings—test induction motors, etc., etc. One book is full of trouble-shooting charts that show quickly symptoms, causes, specific remedies, etc.

Take the first step toward improving YOUR future—Mail this coupon TODAY

No money down—special price—easy payments—FREE trial

McGraw-Hill Book Co., Inc., 330 W 42 St., N. Y. 18, N. Y.
Send me for ten days' free examination the Electrical Maintenance and Repair Library. If satisfactory I will send you $2.50 in 10 days and $3.00 monthly until the price of $17.50 is paid. If not wanted I will return books postpaid.

Name.....
Home Address.....
City and State.....
Company.....
Position..... PSM-9-48

INVENTORS

When you are satisfied that you have invented a matter of value—write me, without obligation, for full information as to what steps you should take to secure a Patent.

The usual first step is to have a search of the prior U. S. Patents conducted, so that I can report to you on the question of Patentability.

PATRICK D. BEAVERS
(Formerly RANDOLPH & BEAVERS)
Registered Patent Attorney
937 Columbian Building, Washington 1, D. C.

PATRICK D. BEAVERS, *Registered Patent Atty.*
937 Columbian Bldg., Washington 1, D. C.
Please send me full information on how to secure Patents & Trademark Registration.

Name.....
Street.....
City..... *State*.....

Approved for Veterans

GET FREE CATALOG H

Prepare NOW for a profitable career. Basic and Advanced Courses in Portrait, Commercial and Color work. Well-established, nationally-known school. Day or evening classes. Immediate enrollment if you hurry! Write today for details.

BALTIMORE INSTITUTE OF PHOTOGRAPHY
N. Charles at 24th St., Baltimore 18, Md.

BE A REAL ESTATE BROKER

PAYS BIG! **EASY TO LEARN**—Start and run your own business *quickly*. Many graduates report making up to $1000 a month. Course of study covers *Sales, Property Management, Appraising, Loans, Mortgages* and hundreds of related subjects. Course in home study or **classroom instruction in leading cities.** Big new illustrated catalog from this nationally known school. G. I. Approved. Send a Post Card Today.

FREE

WEAVER SCHOOL OF REAL ESTATE (Estab. 1906)
15 E. Pershing Road Dept. PC Kansas City, Mo.

BE AN ARTIST



Send for interesting picture book
"BUILDING A FUTURE"
Explains the unique position of the professional artist in American life. Gives examples of huge professional income. Tells definitely how YOU can acquire PROFESSIONAL skill—AND PROFESSIONAL INCOME—within one year—in spare time at home. No obligation. Book is free. Write name, address and age on penny postcard and mail TODAY to:

GRANT SCHOOL OF ART
Dept. 268, 53 W. Jackson Blvd., Chicago 4, Ill.

LEARN MONEY-MAKING CARTOONING

IN SPARE TIME — by Easy Picture Chart Method
Same Simplified Method that has helped train creators of "Terry & Pirates," "Freckles," "Out Our Way," "Winnie Winkle," "Reg'lar Fellers," "Strange As It Seems," "The Neighbors," and many others. Earn while learning. Send 10c for Picture Chart (to test your ability). Samples of successful students, and full details. (State age.)

The Landon School, 4829 Cleveland Transit Bldg., Cleveland, O.

Thrilling Work COLORING PHOTOS

Fascinating vocation learned at home by those with aptitude. Thrilling pastime. National method brings out life-like colors. Free booklet.
NATIONAL PHOTO COLORING SCHOOL
1315 S. Michigan, Dept. 1366, Chicago 5

TALK-SING *thru your own radio* *with* RADIO MICROPHONE

Be the life of the party. Put on your own broadcasts at home. Talk-Sing, make announcements from any room. Wonderful voice practice. Microphone easily attached to any radio. Follow enclosed instructions. SEND NO MONEY—pay Postman $1.98, plus postage. Send Money Order or check and save postage.

EMPIRE RADIO & TELEVISION CO. (Dept. S.S) 1521 Bedford Ave., Brooklyn 16, N. Y.

make your own *Gems* 29.50 F.O.B.

All necessary lapidary equipment is furnished, including a super-charged diamond blade for sawing, and all wheels for grinding, shaping and polishing; also complete instructions. The complete equipment as shown, less motor and belt, for only $29.50, f.o.b., Burlington, Wisconsin. Write today for information and literature.

B&I MANUFACTURING CO.
Dept. M — Burlington, Wis.

Learn RADIO

TELEVISION, ELECTRONICS by SHOP METHOD HOME TRAINING

Let NATIONAL SCHOOLS, of Los Angeles, a practical Technical Resident Trade School for almost 50 years, train you for today's unlimited opportunities in Radio

these two FREE books will tell you how

GOOD JOBS AWAIT THE TRAINED RADIO TECHNICIAN

You are needed in the great, modern Radio, Television and Electronics industry! Trained Radio technicians are in constant and growing demand at excellent pay—in Broadcasting, Communications, Television, Radar, Research Laboratories, Home Radio Service, etc. National Schools Master Shop Method Home Study Course, with newly added lessons and equipment, can train you in your spare time, **right in your own home,** for these exciting opportunities. Our method has been proved by the remarkable success of National Schools-trained men all over the world.

You Learn by Building Equipment with Standard Radio Parts We Send You

Your National Schools Course includes not only basic theory, but **practical** training as well—**you learn by doing.** We send you complete standard equipment of professional quality for building various experimental and test units. You advance step by step until you are able to build the modern superheterodyne receiver shown above, which is yours to keep and enjoy. You perform more than 100 experiments—build many types of circuits, signal generator, low power radio transmitter, audio oscillator, and other units. The Free Books shown above tell you more about it—send for them today!

Lessons and Instruction Material Are Up-to-date, Practical, Interesting

National Schools Master Shop Method Home Training gives you basic and advanced instruction in all phases of Radio, Television and Electronics. Each lesson is made easy to understand by numerous illustrations and diagrams. All instruction material has been developed and tested in our own shops and laboratories, under the supervision of our own engineers and instructors. A free sample lesson is yours upon request—use the coupon below.

YOU GET THIS AND OTHER VALUABLE INFORMATION IN THE FREE SAMPLE LESSON:

1. Basic Receiver Circuits and How They are Used.
2. Construction of the Antenna Circuit.
3. How Energy is Picked Up by the Aerial.
4. How Signal Currents are Converted into Sound.
5. How the Tuning Condenser Operates.
6. How the R-F Transformer Handles the Signal; and other data, with diagrams and illustrations.

Both Resident and Home Study Courses Offered

APPROVED FOR VETERANS

Check Coupon

NOW! NEW PROFESSIONAL MULTITESTER INCLUDED



This versatile testing instrument is portable and complete with test leads and batteries. Simple to operate, accurate and dependable. You will be able to quickly locate trouble and adjust the most delicate circuits. You can use the Multitester at home or on service calls. It is designed to measure AC and DC volts, current, resistance and decibels. You will be proud to own and use this valuable professional instrument.

NATIONAL SCHOOLS
LOS ANGELES 37, CALIFORNIA EST. 1905

MAIL OPPORTUNITY COUPON FOR QUICK ACTION

National Schools, Dept. PS-9
4000 South Figueroa Street
Los Angeles 37, California

(Mail in envelope or paste on penny postcard.)

Mail me FREE the books mentioned in your ad including a sample lesson of your course. I understand no salesman will call on me.

NAME.....AGE.....

ADDRESS.....

CITY.....ZONE.....STATE.....

☐ Check here if veteran of World War II
Approved for veterans

GET THE DETAILS—SEND THE COUPON ▶

AUTO BOOKS ON APPROVAL

CAN YOU FIX IT?

These wonder books tell step by step HOW to make difficult repairs and adjustments, how to keep a car at maximum efficiency, including latest improvements in car design and operation. Engine troubles and how to correct them well covered.

6 BIG, THICK VOLUMES

Over 2700 pages, 2000 illustrations, wiring diagrams, etc., including Diesel engines. Beautiful modernistic, washable cloth binding.

SEND NO MONEY. Just mail the coupon for a complete set of 4 Big, Thick Auto Books, 20th Edition. Over 2700 Pages! Whether you are a mechanic or helper, expert or apprentice, auto owner or driver, take immediate advantage of this FREE EXAMINATION OFFER.

MAKE GOOD MONEY NOW HOLD A PERMANENT JOB

America wants its automobiles kept in good repair. Men with "know how" are in demand, at big pay. These books will help you get and hold an important job, or give you a chance to go into business for yourself now or later. Any man who half tries to improve himself can learn auto servicing and repairing by this quick reference method. Use the JIFFY INDEX to find easily understood answer to any auto problem. These wonder books prepared by eleven of America's great automobile engineers. Many hundreds of valuable illustrations. Send the coupon TODAY.

A year's consulting privileges with our engineers now given with these books without extra charge.

Publishers Since 1898

AMERICAN TECHNICAL SOCIETY, Dept. A620
Drexel Ave. at 58th St., Chicago 37, Ill.

I would like to examine your 4 Volume Set of Auto Books. I will pay the delivery charges only, but if I choose I may return them express collect. If after 10 days' use I prefer to keep them, I will send you $2 and pay the balance at the rate of only $3 a month until $24.80 has been paid. Include consulting service as offered above.

Name .....

Address .....

City ..... State .....

Please attach letter stating age, occupation, employer's name and address, and name and address of at least one business man as reference. Men in service, also please give home address.

YOU CAN LEARN TO BE AN ARTIST

Start DRAWING At Home in Your SPARE TIME!

Draw for Money! Trained Artists are capable of earning $60, $75 and more a WEEK!

Your future is in your own hands. Prepare yourself now in COMMERCIAL ART, DESIGNING and CARTOONING—all in ONE complete home study course. No previous art experience necessary—we teach you step-by-step for a fascinating hobby and a profitable career. For 34 years WSA graduates have been "making good"—WHY NOT YOU? FREE BOOK, "Art for Pleasure & Profit" fully describes course, service and commercial opportunities. TWO ART OUTFITS included with training. Mail coupon today.

(VETERANS! Course approved under G. I. Bill.)

FREE BOOK gives details!

WASHINGTON SCHOOL OF ART,
Studio 130M, 1115 15th St., N. W., Washington 5, D. C.

NAME _____ AGE _____

Address _____

City _____ Zone ( ) State _____

☐ I am entitled to training under the G. I. Bill.

SHORTHAND IN 6 WEEKS

LEARN AT HOME—LOW COST

Write 120 words per minute. Easy for adults.

Famous Speedwriting system. No signs; no symbols; no machines; uses ABC's. Easy to learn and use. Fast preparation for a position. Nationally used in leading offices and Civil Service; also by executives, writers, speakers, lawyers, scientists, students at college. Over 100,000 taught by mail. The very low cost will surprise you. Also typing. 25th Year.

WRITE FOR FREE BOOKLET TO

Speedwriting

Dept. 2609-S, 55 W. 42 St., N. Y. 18

PHOTOGRAPHY

STUDY AT HOME. Photography offers ever-increasing opportunities for well-paid, fascinating careers. Success-proved N. Y. I. training qualifies you at home. Also resident courses. 36th year. Details FREE!

NEW YORK INSTITUTE OF PHOTOGRAPHY
Dept. 5, 10 West 33 St., New York 1, N. Y.

Learn to Service and Repair

ELECTRICAL APPLIANCES

Open your own electrical appliance service shop. Complete illustrated course covering washing machines, vacuum cleaners, elec. ranges, motors, house wiring and REFRIGERATION. Appliance tools included. Send today for FREE BOOKLET without obligation.

PACIFIC TRAINING SCHOOL
7217 So. Broadway, Dept. S-89, Los Angeles 3, Calif.

LEARN TO WRITE *a Good Hand!*

FOR BUSINESS AND SOCIAL SUCCESS!

Improve your handwriting at home quickly with my new instruction books just off the press. Master all the secrets of better penmanship. Simple and easy, fully illustrated, highly endorsed. Begin today. Write for: ☐ **New Free Book,** "How to Become a Good Penman", or check books wanted, $1.00 each. ☐ Business Writing ☐ Artistic Writing ☐ Card Writing ☐ Engrossing Alphabets ☐ Bird and Design Flourishing ☐ Complete Set $4.50 ☐ Enclose 10c for your name beautifully written and shading penpoint.

S. A. Zilier, President, TAMBLYN SCHOOL OF PENMANSHIP
439 Ridge Bldg. *In Business Over 50 Years* **Kansas City, Mo., U.S.A.**

RADIO

ENGINEERING Television, FM, Broadcasting, Servicing, Electronics, Aviation, Marine & Police Radio taught thoroughly. 72 weeks' Engineering course equivalent to 3 years' college radio work. Approved Veteran Training. Catalog upon request.

Valparaiso Technical Institute, Dept. 503, Valparaiso, Ind.

"YOU ARE UNDER ARREST!"

Help Bring Crooks to Justice Through Scientific

CRIME DETECTION!

We have taught thousands this exciting, profitable, pleasant profession. Let us teach you **in your own home.** Learn Finger Printing, Firearms Identification, Police Photography, Secret Service Methods thoroughly, quickly, at small cost. Over 800 of all American Bureaus of Identification employ I. A. S. students or graduates. We can prepare you for this fascinating work during spare time. Write today, **stating age,** for "Blue Book of Crime."

INSTITUTE OF APPLIED SCIENCE, 1920 Sunnyside Ave., Dept. 1368, Chicago 40, Ill.

SEND FOR THIS FREE!

Make money. Know how to break and train horses. *Write today for this book FREE,* together with special offer of a course in Animal Breeding. If you are interested in Gaiting and Riding the saddle horse, check here ( ) *Do it today—now.*

BEERY SCHOOL OF HORSEMANSHIP
Dept. S-29 **Pleasant Hill, Ohio**

AMERICA'S FOREMOST SCHOOL OF PRACTICAL TRAINING

IS READY TO PREPARE YOU NOW FOR A GOOD JOB IN—

REFRIGERATION AIR CONDITIONING



TRAIN BOTH AT HOME

AND IN ITI'S BIG SHOPS

What's YOUR ambition? Better pay? An interesting job? Your own business? They're all waiting for you **right now** in Refrigeration and Air Conditioning! The tremendous growth of this great industry is almost unbelievable ... and a growing industry needs trained men. If you're mechanically inclined and like to work with tools ... Refrigeration and Air Conditioning offers you a bright future. In a few short months Industrial Training Institute ... America's foremost school of practical training—will prepare you to step into a good paying job with plenty of opportunity to advance.

Home and Shop Training

Under the famous ITI 2-Way Plan you get all the fundamentals of Refrigeration and Air Conditioning at home ... during spare hours. Keep your present job and income while training. Upon completion of your ITI Home Study you come to Chicago, with transportation paid, for a FULL FOUR WEEKS of practical training in our great shops. You actually work with the same kind of equipment you'll meet on the job.

WARM AIR HEATING INCLUDED

ITI Training is best for you because it's really complete ... **including the huge field of Warm Air Heating to boost your income.** You learn *both* the "how" and the "why" of servicing, repairing, installing and rebuilding both home and commercial equipment. The ITI graduate is qualified to handle any practical job in the industry.

AN OLD ESTABLISHED SCHOOL

Established in 1916, ITI has given training to over 400,000 men. Thousands of its graduates hold key jobs at top income. This great school, occupying five large buildings with over $500,000.00 invested in training equipment and facilities, offers you the training you need for a flying start to success.

ITI TRAINING 100% PRACTICAL

You need no special schooling or experience. ITI training is easy to grasp, simple, 100% practical. No dull mathematics or complicated theory. ITI lesson Work Sheets are written in simple English. **After graduation, ITI's Job Placement Help Department will help you find the job you want.**

GET THE FACTS NOW—*Mail Coupon!*

Find out what's ahead for you in Refrigeration and Air Conditioning. See how simple it is to study at home and prepare yourself for a fine job with a splendid future. It's all in our fascinating, illustrated FREE book, "Your Future in Refrigeration and Air Conditioning." Just fill out and mail the coupon for your FREE copy. Take this first step today.

VETERANS: ITI residence training is fully approved under the GI Bill of Rights. Check coupon for special veterans' bulletin.

NON-VETERANS: get the facts about convenient ITI tuition terms.

INDUSTRIAL TRAINING INSTITUTE
Formerly the L. L. Cooke School of Refrigeration & Refrigeration & Air Conditioning
Dept. A-2 2150 LAWRENCE AVE., CHICAGO 25, ILL.

MAIL COUPON TODAY FOR YOUR

FREE BOOK!

Mr. C. H. Smith, President,
INDUSTRIAL TRAINING INSTITUTE
2150 Lawrence Ave.,
Dept. A-2. Chicago 25, Ill.

Please send me FREE the ITI book, "Your Future in Refrigeration and Air Conditioning" and information about the opportunities for trained men in this fast growing field. I understand I'm under no obligation.

NAME _____ AGE _____

ADDRESS _____

CITY _____ ZONE _____ STATE _____

ARE YOU A VETERAN? _____

NOW! Enjoy Learning to Speak SPANISH AT HOME

FRENCH-GERMAN-ITALIAN

COUNT CORTINA

BIG OPPORTUNITIES and JOBS waiting for those who can speak Spanish. Millions of dollars being invested in Mexico, Central and South America—BUSINESS and TRAVEL increasing.

Only 15 Minutes a Day

Learn to SPEAK Spanish like a NATIVE! The **CORTINAPHONE METHOD**, famous for **OVER 65 YEARS**, teaches you—**BY LISTENING** to these **30 NEW CORTINA** recordings. Right in your own home, relaxed and at ease.



Sent on 5 Days Approval

THOUSANDS have learned **SPANISH** this quick, easy way for **PLEASURE** and **BUSINESS.** Why not you? Free 32-page book, "The Cortina Short-Cut," describes this famous method fully and tells how you can try it in your own home for 5 days. **NO COST IF NOT DELIGHTED.** Mail coupon for free book—NOW!

Spanish Course Available Under **G. I. BILL OF RIGHTS** **Write NOW!**

CORTINA ACADEMY
(Established in 1882)
Dept. 129, 105 W. 40th St., New York 18, N. Y.

Please send me—without obligation—your free book. I am interested in (check)

☐ SPANISH ☐ French ☐ Italian ☐ German

Name _____

Address _____

City _____ State _____

☐ If VETERAN check here

TRAIN NOW FOR AN

AVIATION CAREER

IN SUNNY SOUTHERN CALIFORNIA

MAXIMUM TRAINING IN MINIMUM TIME

Specializing in AERONAUTICAL ENGINEERING and MASTER AVIATION MECHANICS since 1929 . . . America's Finest Aeronautical Institute . . . 7000 successful graduates . . . MAKE MORE MONEY . . . MAIL COUPON TODAY. APPROVED FOR VETERANS. Board and Room now available.

Without obligation, send free catalogue with full information.

PS-9

NAME _____ AGE _____

ADDRESS _____

CITY _____ ZONE _____ STATE _____

CAL-AERO TECHNICAL INSTITUTE

GRAND CENTRAL AIR TERMINAL • GLENDALE 1, CALIFORNIA

STUDY AT HOME

With An Educational Institution

Men with specialized training win higher positions, insure larger earnings, and are bigger successes in business and public life. Opportunities NOW greater than ever before. Send for our Catalog.

ARTS and SCIENCES

Courses in Philosophy; Education; Letters; Public Health; Medical Jurisprudence; Psychology; Sociology; Physics; Chemistry; Plastics; Geology; Political Science; Theology; Business and Commerce; Accounting; Mathematics; Statistics; Agriculture.

ENGINEERING

Courses in Electrical, Civil, Mechanical, Drafting, Architectural, Steam, Aeronautical, Radio, Structural, Mining, Industrial, Petroleum, Marine, Chemical, Diesel, Automobile, Refrigeration, and Air Conditioning Engineering.

LAW

Complete Professional Law Course includes 15 Hornbrook Series college grade textbooks. Courses also in Commercial Law, Patent Law and Medical Jurisprudence.

McKinley-Roosevelt Incorporated, 4610-AB, Sheridan Rd., Chicago 40, Ill.

THERE'S MONEY IN CARTOONS!

RAYE BURNS will teach you HOW to CREATE ORIGINAL CARTOONS **at home** that you may SELL! Course contains **26 lessons** and **over 600 illustrations.** All for *Only..* **$2.85**

Send name and address for free details.

RAYE BURNS SCHOOL, Dept. 8, Box 3583, CLEVELAND, OHIO

WATCHMAKING

Be a Watchmaker—Be Independent

Get practical training at the only school in Chicago accredited by the Horological Institute of America. Day and Evening Classes—Approved for Veterans

Write today for free information

CHICAGO INSTITUTE OF WATCHMAKING

7 So. Pulaski Road Dept. PS-9 Chicago, Illinois

Learn MECHANICAL DENTISTRY

A profession offering unlimited opportunities. Most modern and complete course embracing every branch from Plate to Porcelain Work, which prepares you to work for Dentists or start your own business. Individual instruction—practical training in day or night school. No books—no classes. Catalog upon request.

McCARRIE SCHOOL of Mechanical Dentistry, 207 N. Broad St., Dept. 875, Philadelphia, Pa.

"How to Make Money with Simple Cartoons"

A book everyone who likes to draw should have. It is free; no obligation. Simply address

FREE BOOK

CARTOONISTS' EXCHANGE

Dept. 199-D Pleasant Hill, Ohio

Learn BAKING At Home

Baking is one of America's high industries in wages. Nearly depression-proof. Thorough basic home course lays sound foundation. If you have aptitude, write for FREE BOOKLET, "Opportunities in Commercial Baking."

National Baking School, 1315 Mich. Ave., Dept. 1366, Chicago 5

COLOR AT A PRICE YOU CAN AFFORD TO PAY

"PHOT-O-CHROME" 2½ x 3½ **50c** (unmounted)

"SPARKLING COLOR PRINTS"

Made From Any Ansco, Ektachrome or Kodachrome Transparencies

5 x 7 . . . 2.50 8 x 10 . . . 4.00

CLEVELAND COLOR SERVICE

3974 EAST 131st STREET CLEVELAND 5, OHIO

LAFAYETTE CONCORD KIT-QUARTERS FOR RADIO BEGINNERS HAMS and PROFESSIONALS

AMERICA'S GREATEST RADIO VALUES

Easy 3 tube AC-DC Student's Kit



Get into fascinating educational radio with this easy-to-assemble kit. Contains all the parts needed to build complete radio. Full instructions. No special tools. Send for this bargain-buy now. Less tubes. *Only*..... $5.95

Exciting new 5 tube* AC-DC Kit

POPULAR SUPERHET . . . easy to assemble. Wonderful to listen to. All top features. Includes true tone reproduction, automatic volume control, streamlined airplane dial with wide tuning that covers 550 to 1600 Kc, built-in loop antenna, and a new Alnico V speaker. Handsome, modern plastic case and 5 tubes* (including rectifier) included at this low price. Kit contains all parts. Thrill to putting it together. Send for yours now while quantity lasts. *Only* $13.75

Build Your Own Hi-Fidelity Phono Amplifier



4 TUBE AC-DC KIT will bring you real high fidelity record enjoyment. Minimum of construction problems. Will provide long trouble-free operation. Quality of tone will amaze your friends. Built-in equalization network permits the use of a low gain pickup without the use of an additional preamplifier. Two twin triode 12SC7 tubes used as pre-amp and audio driver tubes. Pair of 50B5 beam power amplifiers in push-pull provide an audio output over 4 watts. Frequency response well over 12,000 cycles. Power supply consists of 2 selenium rectifiers in a voltage doubler circuit eliminating rectifier tubes. Order this fine kit—contains full instructions. *Great value at* $13.95

LAFAYETTE-CONCORD

100 SIXTH AVE., NEW YORK 13 — 229 W. MADISON ST., CHICAGO 6
265 PEACHTREE ST., ATLANTA 3 — 110 FEDERAL ST., BOSTON 10
24 CENTRAL AVE., NEWARK 2 — 542 E. FORDHAM RD., BRONX 58

SPECIAL INTERCOM VALUE

HOME • NURSERY • OFFICE
GARAGE • STORE • FACTORY

$12.95

A real 2-way system. Calls can originate at either station. Picks up your voice or a baby's whimper at 15'. Ready to operate, all you need is a screwdriver. Strong plastic cabinets. Saves time and effort. Ideal for nursery or general use in the home. Remote can be placed up to 2000' from master station. Eliminates needless climbing of stairs. Practical uses everywhere. Complete with 50' of wire. An unbeatable Lafayette value. Supply will be limited to readers of this magazine. So send coupon with order $12.95

BIG NEW 180 Page FREE CATALOG!

your copy is waiting . . . get it!

LAFAYETTE and CONCORD have combined to form the world's largest radio supply organization. Their new catalog — just off the press tells with terrific sock what this means to you. 180 pages jam packed with hundreds of thousands of items at absolute rock-bottom prices. Lists every part and kit you could possibly need for building television, home radio, ham, phonograph, high fidelity equipment, etc. *Make Lafayette your buying headquarters!* Half a million other radio men and hobbyists have done so! They don't miss up on these amazing values. Why should you? Shop in person at one of our outlets or order by mail—either way you'll save *big* money. Start now by rushing the coupon to us on a penny post card at once.

USE THIS COUPON NOW FOR FREE CATALOG AND ORDERING

LAFAYETTE-CONCORD, DEPT. KI-8
100 Sixth Ave., New York 13, *or*
901 W. Jackson Blvd., Chicago 7

MAIL NOW

☐ Please rush FREE catalog No. 89

☐ I enclose $..... Please fill attached order.

NAME.....

ADDRESS.....

CITY.....ZONE....STATE.....

BIG MONEY IN WATCH REPAIRING

LEARN AT HOME

Get into this top-pay, easy-to-learn, uncrowded field thru our unique 10-lesson home study course. Watch makers in big demand. You train step-by-step under experts. We furnish all tools and new 15 jeweled watch. No interference with present job. Get out of the rut—turn spare time into money. More jobs than men to fill them. We have students from 18 to 65 who have profited by our training. Low cost.

Write today for all the facts — NO OBLIGATION.

ILLINOIS SCHOOL OF WATCH REPAIRING Dept. PS-9 2870 Elston Ave. Chicago 18, Ill.

Now for EVERY WORK SHOP!

NEW Invention Electroplates by BRUSH

Easy to Plate CHROMIUM GOLD, SILVER, NICKEL, COPPER

. . . For Pleasure and Profit!

If you have a workshop—at home or in business—you need this new Warner Electroplater. At the stroke of an electrified brush, you can electroplate models and projects—you can replate worn articles, faucets, tools, fixtures, silverware, etc. with a durable, sparkling coat of metal . . . Gold, Silver, Chromium, Nickel, Copper or Cadmium. Method is easy, simple, quick. Everything furnished—equipment complete, ready for use. *By doing a bit of work for others, your machine can pay for itself within a week.* So make your shop complete by getting a Warner Electroplater right away. Send today for FREE SAMPLE and illustrated literature. ACT AT ONCE! *Mail Coupon.*

WARNER ELECTRIC CO., DEPT. T-15
1512 Jarvis Avenue, Chicago 26, Ill.

FREE *Details & Sample!*

WARNER ELECTRIC CO., 1512 Jarvis Avenue, Chicago 26, Dept. T-15
Gentlemen: Send Free Sample and Details to:

*Name*_____
*Address*_____
City *State*

SOUTH BEND

NEW SURFACE PLATE, V-BLOCKS, ANGLE PLATE

SURFACE PLATE for checking, laying out, etc. Precision ground to .001". 12" x 17" x 3", top 3/4" thick . $37.50



V-BLOCKS for holding cylindrical parts. Precision ground. 1-15/16" x 2-15/16" x 2-1/4". Cap. 1/4" to 2". Per matched pair . . $32.00

ANGLE PLATE. Precision ground. 3-1/4" x 3-1/4" x 4-1/4" $20.00

SOUTH BEND LATHE WORKS 456A E. Madison St. South Bend 22, Ind.

Pat. applied for

Start a NEW BUSINESS Or Add to Your Present Repair Business

Sharpen Dull Pipe Wrenches
Pipe Taps & Dies
"Gum" Circular Saws

Write for information.

J. C. MOORE INDUSTRIES P.O. Drawer 276 FREDONIA, PA.

HOW TO CUT RAFTERS

New vest pocket book gives lengths, side cuts, plumb cuts, deductions. For all rafters for any building from one inch to forty feet wide. Gives numbers to cut on square. Also degrees for same cuts for Radial Saws. All standard pitches from 1/8 to 5/8. Just open book to pitch page and there are your lengths, side cuts, etc. Anyone who knows what a jack rafter is can frame a roof if he has this great book. Price one dollar. ($1.25 in Canada). **Builders' Topics, Dept. 5, Lock Box 828, Seattle, Washington.** CARPENTERS, PLUMBERS, PLASTERERS, ELECTRICIANS, ETC. subscribe for Builders' Topics, the monthly magazine for HE-MAN CONSTRUCTION WORKERS. Only $1.00 per year. (In Canada—$1.25). Sample copies 25c.

CORRESPONDENCE COURSES IN RADIO and ELECTRICAL ENGINEERING

Tuition $25

ELECTRICAL ENGINEERING. Get good grasp of wide electrical field. Modern. Very understandable. Theory made easy. **RADIO ENGINEERING.** Extra fine course in radio, public address, photo-electric work. Trains you to be super-service man, real vacuum tube technician. Tuition ONLY $25, either course. Deferred payment plan. Servicemen needed badly.

FREE Write for free copies of school catalogs, student magazines, etc. **LINCOLN ENGINEERING SCHOOL, Box 931-S-117 LINCOLN, NEBR.**

FIX SEWING MACHINES

BIG MONEY. Spare or full time. Open your own neighborhood shop. Thousands need repairs. Send for complete Service Manual—only $1.98 postpaid. Money back guarantee.

SEWING MACHINE SERVICE CO. Hamilton 26-EE, Ohio

SHOE REPAIR OFFERS BIG INCOME

LEARN IN 12 WEEKS TIME

You can own your own shop or earn big income as skilled shoe repairman. Growing demand everywhere at top wages for men who know how. We teach you quickly by actually working on shoes and modern machines. Costs nothing under G.I. Bill of Rights. School open to all from 18 to 60 years of age. **Free Big 16 Page Book** explains everything. Send for your copy today.

MODERN SHOE REBUILDING SCHOOL
Established 1927
2937 Belmont Ave., Chicago, Ill. RUSH POSTCARD TODAY! 4577 Hollywood Blvd., Los Angeles 27, Calif.

New Designs in FRANZITE GRIPS

Modernize Your Gun! Improve Your Score!

Most durable grips made. Positively unbreakable! For Colt, Smith & Wesson, Hi-Standard, Ortgies, Luger & Mausers in a wide choice of beautiful designs in ivory, pearl, walnut, onyx, etc. Low prices. FREE CATALOG. Dealers Wanted.

SPORTS, INC., (Mfrs.) 5501 Broadway, Dept. S-9, Chicago 40, Ill.

MAIL THIS *Opportunity* COUPON TODAY!

SEND FOR THIS 30 PAGE *FREE* BOOK

RADIO TRAINING ASSOC. OF AMERICA, DEPT. PS1
5620 Hollywood Boulevard., Hollywood 28, Calif.

Send free illustrated book showing how I can make good in Radio and Television, through training direct from Hollywood.

Name_____ Age_____

Address_____

City_____

Zone_____ State_____

LEARN HOW YOU CAN MAKE GOOD IN

RADIO

TELEVISION-ELECTRONICS

through practical HOME-STUDY plus

10 BIG KITS of RADIO PARTS *R. T. A. GIVES YOU!*

YOU WILL DO SCORES OF PRACTICAL JOBS AND EXPERIMENTS

JUST A FEW OF THE JOBS YOU'LL DO...

With RTA's 10 BIG KITS you'll build a TRF Receiver, High-Frequency Converter, Complete 6 Tube AC-DC Superheterodyne plus more than a hundred other valuable and practical experiments. Thus RTA methods give you BALANCED TRAINING — Theory PLUS Real Shop Experience, right in your own home.

25 Years of Home Training Experience

Select your school carefully. Select a school like RTA, with more than a quarter century of practical experience in the home-training field, a school that is right "on-the-spot" in Hollywood, where newest technical improvements are introduced!

EARN EXTRA MONEY *while learning* AT HOME

Under RTA's easy, practical home-training plan, you study in SPARE TIME ONLY and RTA's Hollywood Experts show you how to earn WELCOME EXTRA CASH, even while learning! In fact, like many RTA students—you may actually get MORE SPARE TIME WORK than you can handle.

MASTER HOLLYWOOD TECHNICIANS *Guide You*

Direct from Hollywood, the very heart of America's Broadcasting, Television, Radio and Sound industries, RTA brings you practical "Time-Tested" Home Training. Because RTA is so favorably located in Hollywood, it is in an excellent position to bring you ACTUAL METHODS developed by the Radio-Television industry, leading to real money-making opportunities!

400 MILLION RADIO *and* TELEVISION SETS

will be built in the next 10 years. 72 million dollars is being spent RIGHT NOW for radio repairs ALONE! When you are thoroughly trained you can imagine what opportunities await you in Your Own Radio Sales & Service Business, Television, FM, Manufacturing, etc.

RADIO TRAINING ASSOCIATION OF AMERICA 5620 HOLLYWOOD BLVD. HOLLYWOOD 28, CALIF.

YOU can acquire

LAW NIGHTS AT HOME! L.L.B. DEGREE

LaSalle's famous Law Library—used as reference in many Law libraries and Law offices—has enabled thousands to master Law surprisingly fast, in spare hours at home, for business and professional advancement.

These 14 remarkable volumes, compiled by leading professors and lawyers, cover the whole basic field of Law in condensed, orderly, simplified manner.

You advance rapidly with this great library, plus special lectures furnished. We guide you step-by-step with personalized Problem Method of instruction . . . you *learn by doing*—handling legal problems—not by memorizing rules.

Send for two FREE 48-page booklets, "Law Training for Leadership," and "Evidence," answering questions about Law and its value to you, and telling how LaSalle Law graduates are winning rapid advancement in business and public life. Mail coupon below. No obligation.

LA SALLE EXTENSION UNIVERSITY
A Correspondence Institution
417 S. Dearborn St. Dept. 383-L Chicago 5, ILL.

Send me your two FREE booklets described above, without obligation.

Name..... *Age*.....

Street.....

City, Zone & State.....

FREE BOOK TELLS HOW YOU CAN LEARN TO MOUNT BIRDS and ANIMALS

BE A TAXIDERMIST—Learn by Mail

Easy home lessons teach you quickly how to MOUNT BIRDS, ANIMALS, GAME-HEADS, FISH—to TAN LEATHER, FURS. Save your hunting trophies. Have a home museum. It's thrilling! Taxidermy is wonderful, FUN, A PLEASURE HOBBY AND A MONEY MAKER—Investigate! Get this strange FREE BOOK.

EXTRA MONEY: —Earn in your spare time. Sell your mounts; and do work for other sportsmen. Students report $30 to $75 and more per month. Big demand. Fine prices. If you want REAL PROFIT from spare time WRITE TODAY.

Game is growing scarcer—every specimen valuable!

FREE BOOK —with 100 shots of wild game. Tells about Taxidermy and how YOU can learn, easily, quickly, Old reliable school. 275,000 students. — — STOP this minute and **TEAR OUT THIS AD NOW** as a reminder; then write; get the free book. You will be delighted, AMAZED. RUSH postal or letter and learn how to have more FUN, FASCINATION, PROFIT. State your AGE.

Northwestern School of Taxidermy, Dept. 2209 Omaha, Neb.

Have an OFFICE of YOUR OWN!

LEARN NEW PROFITABLE PROFESSION
At Home in 60 Days, Men & Women, 18 to 70!

Be Your Own Boss and the Boss of Others. Be Respected. Meet Interesting People.

Earnings of men and women in this profession run as high as $5,000-$15,000 yearly. Others make good money in spare time. Little money needed to start. A business where your earnings begin sooner. Easy to learn. No selling or goods to buy. No experience necessary. A depression-proof business. A course of action to guide you step by step as you earn. All 53 lessons sent at once to use as operating manuals. Easy terms. Diploma. Money-back agreement. Write for **FREE BULLETIN.**

BY MAIL in Easy Lessons

FRANKLIN CREDIT SCHOOL
Dept. 71-J ROANOKE 7, VIRGINIA

TRI-STATE COLLEGE

B.S. Degree in 27 months in Engineering (7 branches), Bus. Admin., Acctg. and Sec. Science. Graduates successful. **65th year.** Enter Sept., Jan., March, June. Write for catalog. **898 College Ave., Angola, Ind.**

WATCHMAKING

Millions of watches and clocks need repairing. Start your training now for a better paying job or own profitable business. Qualified watchmakers in demand. Outstanding training by experts. Write for free catalog. Approved for veterans.

SCIENTIFIC SCHOOL OF WATCHMAKING, Dept. PS-9
3923 San Fernando Road Glendale 4, Calif.

AGENTS 300% Profit SIGN LETTERS

For Store Fronts and Office Windows. Anyone can put them on. Free Samples. Liberal Offer to general agents.

METALLIC LETTER CO., 441 N. Clark, Chicago 10

HELP FOR INVENTORS

Hundreds of manufacturers have requested our assistance in locating marketable new products.

Complete information, free.

INSTITUTE of AMERICAN INVENTORS
Dept. 3, 1926 Eye St. N.W., Washington 6, D. C.

INVENTORS

Whether an invention is patentable can be substantially determined by a search of the U. S. Patent records. Without obligation, write for information explaining the steps you should take to secure a patent.

JOHN N. RANDOLPH
Registered Patent Attorney
205 Columbian Building Washington 1, D. C.

PATENTS AND TRADE MARKS

C. A. SNOW & CO.
REGISTERED PATENT ATTORNEYS
WRITE FOR INFORMATION TO
246 SNOW BUILDING, WASHINGTON 1, D. C.

INVENTORS

IF YOU WISH TO PROTECT YOUR INVENTION,
You should take steps to protect it by a U. S. Patent. Write me for "Record of Invention" form.

CARL MILLER
REGISTERED PATENT ATTORNEY

Woolworth Bldg. 35th Floor, Dept. 89-C, New York City
Please send me "Record of Invention" form.

NAME.....

ADDRESS

Now ANY AUTO REPAIR JOB Can Be "Duck Soup" For You!

MoToR's New AUTO REPAIR MANUAL Shows You How to Service and Repair ANY Part of ANY Car!

FREE 7-DAY OFFER!

NOW you can "polish off" the HARDEST jobs the EASIEST way! MoToR's AUTO REPAIR MANUAL is ready to show you how to repair anything from carburetor to rear end—with the least possible amount of time and effort!

Suppose plain-talking car engineers from every auto plant in America got together and showed you all the things you needed to know about repairing and servicing the cars they had designed and manufactured! That's really what you get in this big manual! Right at your fingertips, the main "dope" from over 150 Official Factory Shop Manuals, covering every make car built since 1935!

Easy to use, too! Quick-index leads you to right page in jiffy! Just follow simple instructions step-by-step.

SEE HOW MUCH YOU GET!

Over 700 pages, 8½ x 11 inches, bound in sturdy covers. 200,000 service, repair, adjustment, replacement, tune-up facts on all makes and models, built from 1935 to 1948! More than 1700 cutaway photos, diagrams, drawings show you exactly WHAT to do and HOW to do it. Used by U. S. Army, trade and technical schools everywhere, thousands of auto servicemen.

Now YOU — without cost —can see for yourself what a wonderbook MoToR's Auto Repair Manual really is. Try it—FREE—for 7 days! Learn first-hand how it can pay for itself the first few times you use it.

SEND NO MONEY

7-Day Free Examination

Just mail coupon at right, without money! When the postman brings your book, pay him nothing. First make it show you what it's got! Unless you agree this is the greatest time-saver and work-saver you've ever seen —return book in 7 days and pay nothing. Mail coupon today! Address: MoToR Book Dept. Desk 2-K, 572 Madison Ave., New York 22, N. Y.

Published by MoToR, The Leading Automotive Business Magazine. MoToR's manuals assure high standards of repair work.

Same FREE 7-Day Offer Applies on MoToR's TRUCK REPAIR MANUAL

For mechanics, truck specialists, service stations, fleet owners. Covers EVERY job on EVERY truck made since 1936! 1400 pictures, 952 pages, 300,000 facts. Used by Armed Forces. All types Gasoline Engines, Diesels, Hesselman, Fuel Systems, Governors, Lubrication Systems, Ignition Systems, Starters, Generators, Clutches, Transmissions, Axles, Torque Dividers, Transfer Cases, Brakes, Steering, etc. ALSO SERVICES buses, farm and industrial tractors, contractor and road building equipment, stationary power machinery, etc. (on all parts described in Manual.) Check box in coupon at right.

Covers All These Makes!

American Bantam, Auburn, Austin, Buick, Cadillac, Chevrolet, Chrysler, Cord, Crosley, De Soto, Dodge, Ford, Frazer, Graham, Hudson, Hupmobile, Kaiser, Lafayette, La Salle, Lincoln, Lincoln Zephyr, Mercury, Nash, Oldsmobile, Packard, Pierce Arrow, Plymouth, Pontiac, Ree, Studebaker, Terraplane, Willys

Clear, Pictured Facts on Every Job on Every Car Built Since 1935!

Nearly 200,000 service and repair facts on all 32 makes. Over 700 big pages; including 70 pages of carburetor text, charts, illustrations, covering all models. Over 200 charts, tables; Tune-up Chart; Valve Measurements; Torque Wrench Reading; Starting Motor; Engine Clearances; Generator; Body Service; Dash Gauges; Brake Specifications; Front End Measurements, etc., Engines; Electric, Fuel, Cooling, Lubricating Systems; Transmissions; Universals; Front Ends; Wheels; Rear Ends, etc.

MAIL COUPON NOW FOR 7-DAY FREE TRIAL

MoToR Book Dept., Desk 2-K, 572 Madison Ave., New York 22, N. Y.

Rush to me at once: (check box opposite book you want).

☐ **MoToR's AUTO REPAIR MANUAL.** If O.K. I will remit $1 in 7 days (plus 35c delivery charge), then $2 monthly for 2 months, with a final payment of 95c one month later. Otherwise I will return book postpaid in 7 days. **(Foreign price, remit $8 cash with order).**

☐ **MoToR's TRUCK REPAIR MANUAL.** (Described at left.) If O.K., I will remit $2 in 7 days, and $2 monthly for 3 months, plus 35c delivery charge with final payment. Otherwise I will return book postpaid in 7 days. **(Foreign price, remit $10 cash with order).**

Print Name _____ Age _____

Print Address _____

City _____ Zone No. (if any) _____

State _____ Occupation _____

☐ **Check box and SAVE 35c delivery charge** by enclosing WITH COUPON entire payment of $5.95 for Auto Repair Manual (or $8.00 for Truck Repair Manual). Same 7-day return-refund privilege applies.

Paint Your Car!

AND 1001 OTHER ITEMS

AMAZING NEW

"Super" CARONIZE

FACTORY-FINISH TYPE

AUTO ENAMEL

One Quart Covers! One Hour to Apply! One Hour to Dry!

Just Wipe it on!

Handy Applicator INCLUDED AT NO EXTRA COST

Makes Your Old Car Gleam Like New!

Now you can quickly and easily make your old car look almost NEW! Just give it a speedy coat of new "SUPER" CARONIZE. With "SUPER" CARONIZE all back-breaking labor is eliminated . . . NO BRUSHING, SPRAYING, MASKING, BUFFING OR SCRAPING is necessary. Simply clean car and WIPE ON this sensational new fast-drying paint. In just a short time, your car will GLEAM with a mirror-bright finish that LASTS FOR YEARS. "SUPER" CARONIZE won't peel, crack, chip in spite of rain, snow or sun.

THE RESULT OF MONTHS OF LABORATORY RESEARCH!

"Super" Caronize smoothly covers your car because it contains genuine THERMOREZ, the very same type synthetic resin as is used in finishing newest cars. If you are getting a new car, a brilliant "Super" Caronize finish may increase your trade-in value $100 and more.

ONLY $2.95 Enough to Paint Almost Any Auto

Guaranteed 3 FULL YEARS

The only wipe-on enamel in America that gives you a 3-year WRITTEN guarantee against chipping, cracking or peeling when applied according to directions.

16 CHOICE OF BEAUTIFUL NEW COLORS

Black • Maroon • "Fiery" (Bright) Red • Cloud Grey • "Washington" (Dark) Blue • Brewster (Dark) Green Monticello (Light) Blue • Jewel (Light) Green • Orange • "Lettuce" (Very Light) Green • Light Yellow • Tan Ivory • Chrome • Clear • White

"Super" Caronize White is absolutely non-yellowing

AMAZING FOR AUTOS and 1001 OTHER PAINT USES

AT HOME

Caronize colors are wonderful for all refrigerators, gas stoves, furniture. All porcelain, metal and wood surfaces. "Super" Caronize Clear gives a durable coating to floors, linoleum and all household woodwork.

OUTDOORS

Perfect for all lawn furniture, swings, bird-baths and other items of this type. Also recommended for boats, canoes, etc.

ON THE FARM

Durable for tractors and all other kinds of farm implements, dairy and utensil uses.

STORES AND OFFICES

Excellent for desks, table tops, files and 1001 other uses in stores, shops, taverns, beauty parlors, offices, etc.

SEND NO MONEY

RUSH ORDER TODAY!

Use coupon below. Send us your color choice today! Pay postman only $2.95 plus postage. Or send cash and we pay postage.

Fill Out and Mail This Coupon Today! Send No Money!

Please send me . ..... qts. of "Super" Caronize at $2.95 per qt.

COLORS:

NAME ..... (Please Print)

ADDRESS .....

CITY ..... STATE ....

☐ Send Postpaid, remittance enclosed ☐ Send C. O. D. plus postal charges

CARONIZE, INC. DEPT. PS 9 1801 Singleton Ave. St. Louis 3, Mo.

AGENTS & DISTRIBUTORS
Write for Free Information Today

WHICH OF THESE *Opportunities* INTERESTS *You* MOST?

Accounting
Air Conditioning
Architecture & Building
Automotive Engineering
Aviation—Practical
Aviation Drafting & Design
Better Foremanship
Bookkeeping
Business Management
Contracting
Diesel Engineering
Drafting & Design
Electrical Engineering
Electricity—Practical
Electronics, Industrial
High School Courses
Machine Shop Operations
Mechanical Engineering
Plastics Engineering
Plumbing—Practical
Private Secretary
Radio Operating & Servicing
Railway Training
Refrigeration
Sheet Metal Pattern Drafting
Shop Management
Tool Making

THINK! LOOK FORWARD!

Business is making big, new plans
Men and Women are preparing for the future
WHAT ARE YOU DOING ABOUT *YOUR* TOMORROWS?

● *Today,* choose the job you want—and prepare for it. Or if you are already engaged in the work you like best, start training *now* for quicker promotion. Acquire the knowledge that will help you to get ahead faster, make more money and have greater security.

Invest part of your spare time in more rapid progress. Start training now, in spare time in your own home. Be ready to grasp your opportunity and step out ahead of those who lack the ability you have attained.

American School, founded in 1897 as an educational institution *not for profit,* can help you to reach your goal just as it has helped others during the past fifty-one years. Give serious thought to the list above. Pick one or more subjects that interest you. Then check the coupon at right, add your name and address and mail it at once. The school will send you details on its training plan and outline of study prepared by specialists. There is no charge, no obligation, so send the coupon immediately.

PRACTICAL, EFFECTIVE HOME - STUDY TRAINING SINCE 1897

Take This First Easy Step

CHECK, CLIP AND MAIL COUPON NOW

AMERICAN SCHOOL, Dept. G646, Drexel at 58th, Chicago 37, Ill.
Without obligation, Please send FREE and postpaid, bulletin and details of the Subject checked.

- ☐ PLASTICS ENG'R
- ☐ Refrigeration
- ☐ Architecture and Building
- ☐ Contracting
- ☐ Practical Plumbing
- ☐ Automotive Engineering
- ☐ Aviation Drafting
- ☐ Aviation
- ☐ Business Mgnment
- ☐ Railway Training
- ☐ Accounting
- ☐ Electrical Engr.
- ☐ Electricity-Pract.
- ☐ Electronics, Industr.
- ☐ Bookkeeping
- ☐ Private Secretary
- ☐ Diesel Engineering
- ☐ Sheet Metal Pattern Drafting
- ☐ Drafting and Design for Men and Women
- ☐ Radio
- ☐ High School
- ☐ Air Conditioning
- ☐ Mechanical Eng.
- ☐ Shop Management
- ☐ Tool Making
- ☐ Better Foremanship
- ☐ Machine Shop Operations

Name..... *Occupation*.....
Address..... *Age*.....
City..... *State*.....

AMERICAN SCHOOL
Dept. G646, Drexel at 58th Street, Chicago 37

BE A WINNER AT ANYTHING YOU TACKLE WITH PROGRESSIVE POWER

Now ALL 5 FAMOUS JOWETT COURSES on 1 Volume For Only 25¢

"The Jowett System is the greatest in the world!" says R. F. Kelly, Physical Director, Atlantic City

Let's Go, Pal! I'll prove I can make YOU an "ALL-AROUND" HE-MAN

FAST—or NO COST! says George F. Jowett World's Greatest Body Builder

Enjoy My "Progressive Power" Strength Secrets! Give Me 10 Easy Minutes a Day—Without Strain!

I'll teach you the "Progressive Power Method" through which I rebuilt myself from a physical wreck the doctors condemned to die at 15, to the holder of more strength records than any other living athlete or teacher! "Progressive Power" has proven its ability to build the strongest, handsomest men in the world. And I stand ready to show you on a money back basis—that no matter how dabby or puny you are I can do the same for you right in your own home. Let me prove I can add inches to your arms, broaden your shoulders, give you a man-sized chest, powerful legs and a Rock-like back—In fact, power pack your whole body so quickly it will amaze you! Yes, I'll jam you with power and confidence to master any situation—to win popularity—and to get ahead on the job! Through my proven secrets I bring to life new power in you inside and out, until YOU are fully satisfied you are the man you want to be.

PROVE IT TO YOURSELF IN ONE NIGHT

Send only 25c for my 5 easy-to-follow, picture-packed courses now in 1 complete volume "How to Become a Muscular He-Man." Try it for one night! Experience the thrilling strength that surges through your muscles.

George F. Jowett

whom experts call "Champion of Champions" ● World's wrestling and weight lifting champ at 17 and 19 ● World's Strongest Arms ● 4 times World's Perfect Body—plus other records!

I am making a drive for thousands of new friends fast —REGARDLESS OF COST!

SO GET NOW MY 5 Muscle Building COURSES (Valued at $5 each)

All in 1 Great Complete Volume Packed With How-To-Do-It Pictures!

Now, this "get-acquainted," extremely low price of only 25c is your chance to build a body you'll be proud of! Follow Jowett's easy method of muscle building NOW! For Only 25c

10 DAY TRIAL! Think of it—all five of these famous courses now in one picture-packed muscle-building volume for only 25c. If you don't actually FEEL results within ONE WEEK, send it back and your money will be promptly refunded!

PHOTO BOOK OF FAMOUS STRONG MEN!

FREE! Photos that inspire you to might and muscle. Free with order.

FREE GIFT COUPON!

Jowett Institute of Physical Culture Dept. PS-89
230 Fifth Avenue, New York 1, N. Y.

Dear George:—Please send by return mail, prepaid, FREE Jowett's Photo Book of Strong Men, along with all 5 Muscle Building Courses. 1. Molding a Mighty Chest. 2. Molding a Mighty Arm. 3. Molding a Mighty Grip. 4. Molding a Mighty Back. 5. Molding Mighty Legs—Now all in One Volume "How to Become a Muscular He-Man." Enclosed find 25c. NO C.O.D.'S.

George F. Jowett Champion of Champions

NAME.....AGE.....
(Please Print Plainly, Include Zone Number)

ADDRESS.....

Be A MASTER PLUMBER

Earn $15 To $50 A Day

DON'T ENVY THE PLUMBER—BE ONE

Every skilled workman will tell you that Plumbers have the best of it. WINTER and SUMMER the Plumber is busy at top wages. No skilled Plumber is ever out of a job—compare his opportunities with any trade, plus the opportunities of having your own shop.
We teach you Plumbing with TOOLS (not books) under Licensed Master PLUMBERS in one of the finest equipped schools in America. We make you a Plumber, every branch is taught thoroughly—Lead Work—Blueprint for plan reading—all other tricks.

LEARN IN 32 WEEKS WITHOUT PREVIOUS EXPERIENCE

If you like to work with tools you owe it to yourself to investigate. No need to ever work as an apprentice. Get free bulletin. Write now! G.I. APPROVED. Our 24th year.

UNIVERSAL PLUMBING SCHOOL
819 HOLMES STREET KANSAS CITY, MO.

LAW FREE BOOK

Your FREE copy of "The Law-Trained Man" shows how to gain prestige and greater earnings through Blackstone home law study. All instruction material furnished including 18-volume Law Library written by 65 well-known law authorities. Lawyers, judges among our graduates. LL.B. degree. Low cost; easy terms. Write today.

BLACKSTONE COLLEGE OF LAW 225 N. Michigan Ave. Dept. 126, Chicago 1, Ill.

A Correspondence Institution Founded in 1890

ENGINEERING DEGREE IN 27 MONTHS

INDIANA TECHNICAL COLLEGE

Aeronautical, Chemical, Civil, Electrical, Mechanical, and Radio Engineering (inc. television). Drafting, 1-yr. Gov't approved for G.I.'s. Low rate. Earn board. Large industrial center. Students from 48 states, 18 countries. Demand for graduates. Enter Sept., Dec., March, June. Catalog.

698 E. Washington Blvd., Ft. Wayne 2, Ind.

AMAZING DISCOVERY! Corrects poor penmanship in few days —big improvement in three hours. **TEN DAYS TRIAL ALLOWED.** Write C. Ozment, 35-D. St. Louis, Mo. IMMEDIATELY.

BUILD THIS CONCRETE BLOCK MACHINE



Sell blocks; or build your home, garage, barn, or filling station at 1/3 cost by making and laying your own blocks.
This simple machine which you can build yourself at a cost of $15 (excluding motor) will make a block in 30 seconds using only one form. Mass production can be achieved by a new simple method of removing blocks which allows two to four forms to one vibrator. Power driven concrete mixer plans also. Send dime for details and "How to Make and Lay Blocks" folder.

U-BUILD-IT SERVICE
Dept. 4-A, 206 West Wilder Ave., Tampa 3, Fla.

EXCITING FILMS

Extraordinary and unusual 8-16mm. Silent and Sound Films to thrill your Home Movie Audiences.

For Sample Film and Special List send only 10c to...

EXCITING FILMS 1071 EL CENTRO HOLLYWOOD 38, CAL.

100 PRACTICAL USES

Glider Model FLAME GUN



7 MODELS from $22 up

KILL WEEDS, crab grass, Canada thistle,—stalks, seeds and roots. Destroy brush, caterpillar nests, diseased trees, grasshoppers, chinch bugs, etc. Clear irrigation ditches, split rocks, burn tree stumps..... Sterilize poultry houses, kennels, barns. Use as portable home forge. Melt ice, thaw pipes. Safe, inexpensive. Burns only 4¢ kerosene —94% Air! Thousands satisfied users. Write for FREE CATALOG.....

HAUCK MFG. CO.,
83 Tenth St., Brooklyn 15, N.Y.

LEARN DIESEL AUTOMOTIVE AND ALLIED MECHANICS

at Home in Spare Time

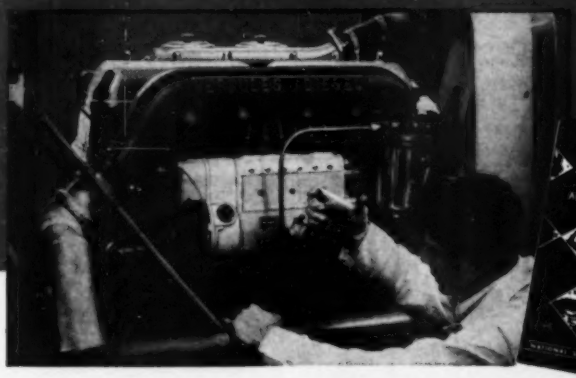

These Two FREE BOOKS will tell you how

GOOD PAY AND INTERESTING JOB OPPORTUNITIES IN THE DIESEL INDUSTRY!

Diesel engines are used in locomotives, tractors, farm machinery, stationary and portable power plants, oil pipeline pumping stations, Diesel trucks and buses, power shovels, excavating machinery and many other applications. Trained Diesel and automotive mechanics are in steady and growing demand to install, maintain and repair Diesel, semi-Diesel, and gasoline engines in these and other fields. Or you can operate your own service shop or commercial garage!

YOU CAN QUALIFY FOR THESE OPPORTUNITIES WITH NATIONAL SCHOOLS' MASTER SHOP METHOD HOME TRAINING!

Behind all National Schools' training is a permanent faculty of experienced instructors and engineers who supervise your home study. We teach you Diesel-electric; Internal Combustion Engines (including Diesel, Gasoline and Butane Types); High-octane fuels; advanced engine principles, etc. Your instruction material is interesting, well-illustrated, easy to understand . . . and *complete!*

COMPLETE TRAINING IN AUTOMOTIVE AND ALLIED MECHANICS

Your course also teaches you basic and advanced gasoline engine principles, construction, repair, chassis units, drive systems, motor tune-up, etc. Your progress is rapid, but thorough.

WE QUALIFY YOU IN SPECIALIZED FIELDS

As a National Schools graduate, you are thoroughly grounded not only in basic engine principles, but also are fully qualified to specialize in Diesel fuel injection, automotive carburetion, ignition, and motor tune-up. You are not just a "grease monkey", but a technically trained, and well-rounded mechanic!

EARN WHILE YOU LEARN

With our Master Shop Method Home Training, you study at home in your spare time. You need not interrupt your present job. You receive Spare Time Work Lessons which enable you to earn while you learn!

Some of the Interesting Positions Open to Trained Diesel and Automotive Mechanics:

- **DIESEL AUTOMOTIVE DEALER, SHOP OWNER, FOREMAN, SUPERINTENDENT**
- **DIESEL POWER PLANT OPERATOR OR MAINTENANCE ENGINEER**
  (Hotels, Factories, Office Bldgs., Pumping and Irrigation plants, farms and ranches.)
- **DIESEL FUEL INJECTION MAN**
- **AUTOMOTIVE CARBURETION AND IGNITION MAN**
  (Motor Tune-Up)
- **DIESEL-AUTOMOTIVE SALES**
- **MARINE DIESEL-AUTOMOTIVE ENGINEER**
- **TRUCK OR BUS EMERGENCY MECHANIC**
- **TECHNICIANS AND MECHANICS FOR SPECIAL WORK**
  according to type of equipment handled.
- **AND MANY OTHERS**

ACT NOW! It costs you nothing to get complete information. Send the coupon for the Free Sample Lesson and Big Illustrated Book "Your Future in Diesel". You will enjoy these valuable books. Both Home Study and Resident Training Offered.

APPROVED FOR VETERANS

Check Coupon Below

NATIONAL SCHOOLS

LOS ANGELES 37, CALIF. • *EST. 1905*

MAIL OPPORTUNITY COUPON FOR QUICK ACTION

NATIONAL SCHOOLS, Dept. PSD-9 *(Mail in envelope or paste on penny postcard)*
4000 South Figueroa Street
Los Angeles 37, California

Mail me FREE the book, YOUR FUTURE IN DIESEL, together with the Sample Lesson. I understand I may keep and use the information with no obligation.

Name..... Age.....

Address.....

City..... Zone..... State.....

Check here if Veteran of World War II

HIGH PAY JOBS

FOR MEN WHO QUALIFY IN DIESEL

ASSURE YOUR FUTURE. Steady, big pay jobs await men qualified in Diesel, Tractor and Heavy Equipment. Can you take advantage of Diesel job and advancement opportunities in this fast-growing field?

COMPLETE DIESEL COURSE AVAILABLE

If you are ambitious and want to get ahead in this lucrative field, you'll want to know about the complete training in Diesel provided by Interstate. Trains you at home in spare time. Does not interfere with your present job. Covers all phases of operation. Up to the minute. Revised regularly to cover new developments. Free placement advisory service.

YOU OWE IT TO YOURSELF

to investigate I.T.S. home Diesel training. Thousands of students agree it has helped them to better jobs . . . better pay. It can do the same for you!

SEND FOR *FREE* BOOK TODAY!

We'll gladly send you our big 24-page book *"Getting Ahead In Diesel"* FREE! Paste coupon on penny card and mail to

INTERSTATE TRAINING SERVICE
4035 N. E. Sandy, Portland 13, Ore.
Please see that I receive FREE BOOK "Getting Ahead In Diesel":

Name_____ Age_____
Address_____
City_____ Zone____ State_____ (J2)

MODERN LAWN MOWER SHARPENER

PROFITS and SPEED



PRICE $241.50 LESS MOTOR

INCREASES PROFITS • INCREASES SALES!
FOR LAWN MOWER SHOPS • FIXIT SHOPS • LOCKSMITHS • HARDWARE STORES • GOLF COURSES • SCHOOLS PARKS • PLAYGROUNDS • INSTITUTIONS • CEMETERIES • AND ALERT INDIVIDUALS!

Sharpens All Reel Type Mowers • Hand, Power or Gang • 10 to 20 Minutes • No Dismantling No Extra Attachments Needed

All reel type mowers, from 5-inch edgers to 36-inch power mowers, are quickly sharpened to extreme ends of both left and right twist reel blades. Handle, wheels, roller and motor remain in place when sharpening is in process. Bed knife is sharpened in same brackets that hold mower in grinding position. No extra attachments required. One lever puts mower or bed knife in grinding position. 100% steel construction. Grinding head rides on five ball bearing races. Small, compact, easy to operate. Sharpens wood chisels, joiner knives and planer blades without extra attachments.

ORDER NOW Immediate Delivery

Skate Sharpener Attachment Available
1/3 H.P., 60-Cycle G.E. Motors Now Available $21.50
Send For Free Bulletin No. 11B

MODERN MFG. CO. 300 N. FAIR OAKS AVE. PASADENA 1, CALIFORNIA

START SMALL GROW BIG



START YOUR OWN REFRIGERATOR REPAIR SHOP!

Learn to install and repair all types of REFRIGERATION and AIR-CONDITIONING equipment. You can start your own shop with as little as $50 worth of tools. We show you how. Our practical, shop-tested home-training prepares you quickly and easily during your spare time, for a job or your own business in this fast-growing profitable industry. Send for FREE BOOKLET today. No obligation.

MECHANICS TRAINING SCHOOL
7217 S. Broadway, Dept. S-89 Los Angeles 3

MAKE MONEY MAKING DONUTS

Make new greaseless donuts at home on electric machine. Sell for cash to grocers, cafes, drug stores, etc. No exp. nec. Good profits. Small investment. Send today for free recipes & plans.
STAN RAY CO. 3608 S. 15 Ave. Minneapolis 7, Minn.

MAGNETS

OF ALL TYPES—10c UP
AMAZINGLY POWERFUL!!
4 oz. Alnico Magnet, lifts 10 lbs. $1.00. Our Leader, 15 oz. Magnet, lifts 40 lbs. $2.50. New alloy—will not weaken! Useful for lifting valuables from tanks, lakes, or rivers easily! 7 small magnets $1.00 with list of many shop and home uses. Satisfaction guaranteed.
R. L. EYRICH, 2566 N. 49TH ST., MILWAUKEE 10, WIS.

DRAINS CELLARS, WASH TRAYS CIRCULATES OIL

Pumps 1800 GPH 300 gal. 30' high, uses ⅛ to ⅓ HP motor. Will not clog. $6.50

Postpaid if cash with order.
(Add 50c for west of the Mississippi.)
Thousands in use since 1936
LABAWCO PUMPS, BELLE MEAD 3, N. J.

BIG 3½ POWER BINOCULARS only 2.98

Quality plus—yet priced to beat all competition. All metal with adjustable focusing wheel and shoulder strap. Tubes extend for sharp, instant view of distant objects. SEND NO MONEY! Clip ad and mail. We'll ship C.O.D. Check here to get handsome Carry Case only 50c extra. ☐
Illinois Merchandise Mart, Dept. 2224A
1227 Loyola Ave., Chicago 26, Ill.

BACKACHE, LEG PAINS MAY BE DANGER SIGN

Of Tired Kidneys

If backache and leg pains are making you miserable, don't just complain and do nothing about them. Nature may be warning you that your kidneys need attention.

The kidneys are Nature's chief way of taking excess acids and poisonous waste out of the blood. They help most people pass about 3 pints a day.

If the 15 miles of kidney tubes and filters don't work well, poisonous waste matter stays in the blood. These poisons may start nagging backaches, rheumatic pains, leg pains, loss of pep and energy, getting up nights, swelling, puffiness under the eyes, headaches and dizziness.

Don't wait! Ask your druggist for Doan's Pills, a stimulant diuretic, used successfully by millions for over 50 years. Doan's give happy relief and will help the 15 miles of kidney tubes flush out poisonous waste from the blood. Get Doan's Pills.

BE A BUILDING CONTRACTOR

Big Earning Opportunities

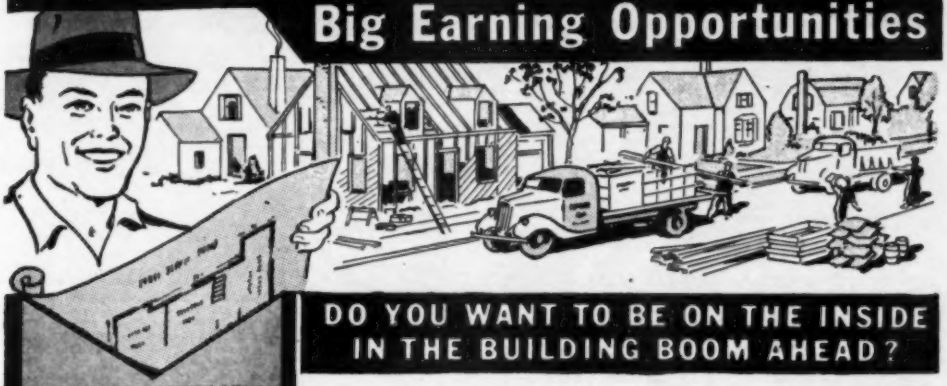

BUILDING CONTRACTING

FREE...

Important Information Telling How To Get Started.

LEARN ABOUT the HOME BUILDERS TRAINING INSTITUTE PLAN...

Essential facts whether you are a tradesman in the building field or whether you have no previous experience.

Action Going On Now in the Building Industry.

MAIL COUPON TODAY FOR FREE ILLUSTRATED BROCHURE

DO YOU WANT TO BE ON THE INSIDE IN THE BUILDING BOOM AHEAD?

■ Big years right ahead in Building. Right now eighteen million Americans who do not own homes are being educated to advantages to them in home ownership! Do you want to be on the inside in the building boom—where big money is made? This is your chance now. Learn about opportunities for Building Contractors whether or not you have previous experience in this field. Millions of dollars are going to be made in home and farm buildings, in construction of stores, garages, small industrial buildings.

BUILDING INDUSTRY NEEDS MEN WITH ORGANIZING ABILITY

■ The Building Industry uses men with organizing ability by the thousands in construction, supervision, management, sales. Properly trained men needed in production, distribution, finance, installation, marketing. Government estimates housing demand at 40 billion dollars!

PRACTICAL HOME STUDY TRAINING—EASY TO LEARN BY THIS PLAN

■ Commercial Trades Institute has developed a training program that gives you the all around training you want to prepare you for your advancement. Modern methods making use of visual aid illustrations make it easy to learn. From very first lesson assignments the type of information provided is the kind that can be useful to a man taking part in building.

GET FREE INFORMATION NOW
MAIL COUPON—NO OBLIGATION

Others are preparing to get in now! Act immediately! To delay preparing yourself is certainly to put yourself at a disadvantage. The building industry is going forward rapidly. Fill out, mail coupon today. No obligation.

Commercial Trades Institute, Dept. D1-9

Billions for Housing Needs

According to a report called "America's Needs and Resources" made available by the Twentieth Century Fund, a capital expenditure of $85,000,000,000 to $87,000,000,000 would be needed to fulfill America's housing needs in the next few years.

The building boom will last for many years. Prompt action now will get you started now—will put you in line for a big-paying job or a business of your own.

FILL OUT—CUT OUT—MAIL TODAY

FACTS FREE for Men Who Want to Get Ahead

Commercial Trades Institute, Dept. D1-9
1400 Greenleaf Ave., Chicago 26, Illinois

Send free illustrated Brochure and other information about Building Contracting.

☐ VETERAN ☐ NON-VETERAN

Name .....

Address .....

City ..... State .....

WAR SURPLUS AND OTHER BARGAINS

RETRACTING ACTUATOR UNIT

Mf'd. to actuate Flying Fort bomb bay doors. 40 to 1 Gear Ratio. Shaft RPM: 95. 24 Volts D.C. Reversible Motor. Lifts heavy loads, depending on size of pulley. 4¾" diameter mounting flange. In great demand for powering farm hoists, heavy garage doors, turntables, directional antenna systems, motion advertising display units, hauling fish nets and for scores of other uses requiring power at low speed. Pays for itself over and over in saving hard manual labor. Illustration shows offset type. Also available in straight line type with 110 Shaft RPM. Original Gov't acquisition cost $300. All new **$27.50** each. Shipping Wgt. 20 lbs.



TRANSFORMER: Jefferson Electric step up or step down transformer. Input, primary 110-117 Volts A.C. Output, from 5 Volts to 650 Volts. Suitable for use with war surplus gadgets, heater relays, radio test filaments, electric trains, house chimes, etc. Weight 10 Lbs. New. **$7.95** Each.

25% DEPOSIT REQUIRED ON C.O.D. ORDERS

SCOOP! We have been awarded 100,000 fancy briar pipes by Quartermaster Corps. Assorted shapes and sizes. All popular makes. Buy now for Christmas Gifts Set of 6, **$3.50**

MICROMETER Chrome plated, precision engineered and carefully tooled to give long life . . . all new. 0-1" capacity, **$2.25.** 1-2" capacity, **$3.50** Each.

COOLER or HEATER: For trailers, autos, offices, darkrooms, homes. DUMORE Motor, 1/6 cont. HP, Amperage 7.5, RPM 6400, 24 Volts. May also be used as dryer. Simple installation, radiator type, copper coils. Transformer advertised in this ad will operate this unit from house current. Weight 13 Lbs. New, **$15.00**

SEND CHECK, MONEY ORDER or CASH

VOLTAGE REGULATOR Like new. 24 V. Carbon Pyle Type, Eclipse, Westinghouse or Leece Neville Mfr. Weight 2½ Lbs. **$5.50** each.



MICROSWITCH: Type Z - 2"x1"x 1". Used open or closed. For automatic contacting-light, sound, model train systems, chimes, etc. New 3 for **$1.** Aluminum Spring Actuator to fit above Microswitch 3 for **$1.**

WILLARD WET PLATE BATTERY

This extra long life rechargeable battery is ideal for portable radios, mobile units, bell circuits, alarm systems, rural telephones, Strobo bulbs, etc. 2 V 20 Amps. Only 5" high. Visible ball float hydrometer built in Lucite case. Shipped dry. Any battery service will supply standard battery electrolyte. Used singly or in multiples. Shipping Wgt. 3½ Lbs. All new. **$2.75** each

ALL PRICES F.O.B. CULVER CITY, CALIF.

WEATHERSTRIPPING ADHESIVE FELT— Dutch Brand, made by Van Cleef Bros. ¾" wide, 3/16" thick. Adheres with strong grip to any surface in any climate. No nailing required. 101 different uses, in aircraft, autos, boats, trailers, etc. Linen backed. 50 Ft. rolls **$1.50** per roll



CONDUIT WRENCH: Mfd. by JOAR. Jaws pass over conduit, pipe or tubing, slips down to snugly encircle fittings. Slight pressure tightens or loosens fittings. Will not mar or kink material. Set of 8. All new wrenches, Nos. 4-6-7-8-10-14-22-28, (Reg. cost $50.00), **$10.00** per set. Weight 4 Lbs.

CLAMPS: Rubber lined, aluminum, hundreds of uses in any shop. Assorted sizes, all new. 5 Doz. **$1.** – 500 **$5.**

AIRBORNE SALES CO., INC. DEPT. PSM 9-8 CULVER CITY, CALIF.

DOUGLASS Steel-Pack MUFFLERS



For All Makes and Models

The Choice of Those Who Know • Deep Throbbing Tone

Engineered and produced by experienced craftsmen. Rugged construction. Steel tubing. (No aluminum). Straight-thru design. Solid tube with steel packing.

Get increased speed, more power and improved economy. Your friends will envy that "throbbing deep tone" which increases with speed.

Complete ready for easy installation. Set of matched tone duals for Ford and Mercury, '35-'48 $20. Singles from $4.95. Send for price list. Chrome tail pipes, $1.75. Order direct. Specify year and model. Sent F.O.B. factory. Check, money order or C.O.D. Satisfaction guaranteed.

RACING EQUIPMENT CO. Dept. PS-9
1916 W. Valley Alhambra, Calif.

MAKE YOUR OWN
LEATHER
BELTS-BILLFOLDS

LEATHER CRAFT . . . Learn this easy and simple way to make money. Make all kinds of hand-tooled leather goods. Hinckley-Tandy has everything for Leather Craft . . . Modelling Tools, Leather, etc. Write today!

Send For FREE CATALOG Dept. P. S.

HINCKLEY-TANDY LEATHER COMPANY
P. O. BOX 791 • FORT WORTH 1, TEXAS

ARTISTS MAKE MONEY

Do you like to draw? Send name, address, age and occupation for FREE ART TEST, to find out your ability.

ART INSTRUCTION, INC.
9148 Art Instruction Bldg., Minneapolis 15, Minn.

STAMMER?

GET THIS FREE BOOK!

This new 128-page book, "Stammering, Its Cause and Correction," describes the Bogue Unit Method for scientific correction of stammering and stuttering—successful for 47 years. **Benj. N. Bogue, Dept. 4826, Circle Tower, Indianapolis 4, Ind.**

Become a Doctor of PSYCHOLOGY

Win the degree of Ps.D. Teach the secret of contentment, happiness. Solve mental worries. Experience the revelation of truth. Chartered college. Individual help. Write for FREE book. **COLLEGE OF UNIVERSAL TRUTH, 5153-A North Clark St., Chicago.**

Be a DETECTIVE

Learn at Home In Your Spare Time

INTERNATIONAL DETECTIVE SYSTEM

Be your own boss! Earn good money in this interesting, respected profession. This is a recognized, authoritative course of training. Includes crime detection, prevention and identification; shadowing, undercover work, etc. Write for FREE BOOK describing training and opportunities. State Age.

INTERNATIONAL DETECTIVE TRAINING SCHOOL
1701 Monroe St., N. E. Dept. 219A Washington 18, D. C.

AMAZING NEW HOLLYWOOD PLAN

Yes, YOU can draw GIRLS, CARS, FRIENDS and even MAGAZINE COVERS. It's so simple, no matter what your age. Many artists make more than $150.00 per week in advertising and cartoons. Be your own boss, draw for money *anywhere*. Our Commercial Artists will teach you the secrets from HOLLYWOOD. Drawing materials furnished. Be a success. Write NOW for *free* details

HOLLYWOOD SCHOOL OF ART
DIVISION OF ARELSON STUDIOS

6533 Hollywood Blvd.
Hollywood 28, Calif.

Name _____
Address _____
City _____ Zone _____ State _____

HIGH INCOME • TRAVEL • ADVENTURE

World Trade is now on the move toward a boom of "gold rush" size. Fortunes should be made both by established traders and by newcomers who "know the rules." Will you be one of those who gain adventure and big earnings in this fascinating career?

SALARIES UP TO $1000 A MONTH

Many positions in World Trade pay salaries from $200 to $1000 and more per month. My new based-on-experience course now makes it possible for you to study at home for one of these fine salaried positions . . .

Or Start Your Own Business

World Trade is an industry in which one-man or one-woman businesses make big profits. Commissions of $10,000 to $20,000 a year, and even more, are not exceptional. And you can easily operate your own business in your home either full or part time.

BUY-SELL WITHOUT CAPITAL

You need little or no capital to start your own World Trade business. My course shows you how I have made big commissions—and how you may, too—acting as buyer for customers abroad. You can do business by mail order world-wide without investing your own money in the goods.

Past Experience Unimportant

No previous special experience or schooling is necessary. I teach you simple, direct methods based on my own 25 years of practical experience. You use my experience. You do not have to know or study a foreign language to be successful in the Export-Import business. The Mellinger World Trade Course shows you how to handle the language problem correctly.



Products for Export in Every State. You Can Operate Anywhere

You can operate a World Trade business on a mountain top in Virginia or on the plains of Nebraska—in your own home—anywhere. You don't have to live in a city. Your customers are all over the world.

I TEACH YOU AT HOME

I have trained both men and women in as little time as one month because my methods are direct, free of non-essentials and red tape. You can start your own mail order World Trade business at home—on practically no investment—even before you finish studying.

INQUIRIES FROM ABROAD answered via Air Mail with full details about course; also trade co-operation plan.

MARSHALL PLAN STARTS PROFIT LANDSLIDE

The Marshall Plan, now called the European Recovery Program, should set in motion the greatest era of big profits in World Trade the industry has ever experienced. According to leading authorities, a volume of SIXTY BILLION DOLLARS in Exports alone is predicted for U.S.A. traders during the next five years. And that does not even take into consider[illegible] volume of new

ALL PRACTICAL — NO THEORY

I give you a KIT OF EXPORT DOCUMENTS and other helpful guides—and a full year's consultation service without extra charge even if you finish my course in one month. I even give you a list of *150 proven overseas representatives* to help get you started earning fast. A World Trade Certificate will be awarded you on successful completion. Other very special features I'll tell you about when you write me.

Start Now—Get Free Literature. Expansion of World Trade is at fever heat. Rush the coupon to me today for free details. The low cost of this course will surprise you. (No salesman will call.) Air mail reaches me over night.

B. L. Mellinger, Director THE MELLINGER CO. Exporters-Importers
1422-AS Westwood Blvd., Los Angeles 24 Calif.

MAIL FOR FREE DETAILS

B. L. Mellinger, Director, The Mellinger Co.
1422-AS Westwood Blvd., Los Angeles 24, Calif.
Please send FREE LITERATURE showing how I may enter the profitable career of World Trade.

Name_____

Address_____

City_____ **State**_____

Veteran?____ **Occupation?**_____ **Age?**____

Location preferred?_____

ELECTRICIANS

Get this Great Book **FREE**

For Merely Examining Coyne's NEW Pay Raising

8 Volume Set APPLIED ELECTRICITY

Here's a *brand new set of electrical* books to give you the "know how" on all branches of electricity from appliance repairing to D.C. and A.C. equipment, electrical refrigeration, Industrial Electronics, etc. 3,400 subjects, 11,500 facts, latest methods explained in easy to follow instructions. To prove how valuable and Practical this set can be to you, I'll *give you a FREE copy* of my book "150 Shop Prints and How to Read Them" *just for looking over this set.* Written by the Coyne Staff and backed by 42 years' experience, this set has helped many ambitious electrical workers to *bigger pay and added opportunity.*

OFFER LIMITED • ACT NOW! If you act promptly, I'll send you the 8 volume set Applied Practical Electricity for 7 days FREE examination . . . together with the 150 Shop Print Book. Look the set over 7 days. If you like it send either $22.75 cash or $3.00 after 7 days and $3.00 per month until $24 is paid. If you don't want the set, return it and YOU OWE NOTHING. *In either event you keep the 150 Shop Print book absolutely FREE.*

Coupon below is just a request to see the books free and to get my gift book for doing it. ACT—Send coupon Today!

Technical Book Div. COYNE ELECTRICAL SCHOOL
500 S. Paulina St., Dept. 68-RS, Chicago 12, Ill.

FREE BOOK Coupon

SEND NO MONEY

B.W.Cooke,Director,COYNE ELECTRICAL & RADIO SCHOOL
500 S. Paulina St., Dept. 68-RS, Chicago 12, Ill.

O. K. send me, postpaid, Coyne's new 8 volume, "Applied Practical Electricity" for 7 Days FREE TRIAL per your offer. Also send, absolutely FREE, the book of 150 Shop Prints as a gift.

Name.....Age.....

Address.....

Town.....Zone.....State.....

WANT A GOVERNMENT JOB?

START **as high as $3,351 Year**

Prepare NOW For Next Examinations

20,000 appointments every month

VETERANS GET SPECIAL PREFERENCE
Many Early Appointments Expected
City Mail Carriers
City Postoffice Clerks
Ass't Statistical Clerks
Stenographers-Typists
Storekeeper—Gaugers, Etc.
40-Page Civil Service Book FREE
Mail Coupon today—SURE

★

FRANKLIN INSTITUTE
(Not Government Controlled)
Dept. F82
Rochester 4, N. Y.

COUPON

Rush to me, entirely free of charge, 40 page book with: (1) A full description of U. S. Government jobs; (2) A list of U. S. Government jobs; (3) Tell me how to qualify for a job.

Name.....

Address.....

.....Vet?.....

Practical Shop Training

in

REFRIGERATION AIR CONDITIONING

and/or

PRACTICAL ELECTRICITY MAJOR APPLIANCES

Service, Maintenance, Installation

Write for Details

Train in the Magic City of the South

COMMERCIAL TRADES INSTITUTE
202 SO. 20TH ST., BIRMINGHAM, ALA.
Veterans Inquire About GI Training

Member: Southern Association of Private Trade Schools.



LELAND ELECTRIC GENERATOR

2.5 KVA, 120 volt, 60 cycle, 1 phase, AC. Any comparable new generator will cost you twice our price.

Remit by Bank Draft

$125 Freight Prepaid In U.S.A.

HOPFER & COMPANY
3120-A E. 14th St., Oakland, Cal.

Free Book

RAISE HAMSTERS

The new wonder animals from Syria. Often called Toy Bears. Delightful pets. Everyone wants them. Laboratories need thousands. Clean, odorless. Raise anywhere. A profitable and interesting hobby or business. We furnish breeders and instructions. Write today for free book.

GULF HAMSTERY, 1540 BASIL ST., MOBILE, ALA.

EYE-GLASSES BY MAIL

16 Days Trial

Write Today for Free Catalog. Send no Money

ADVANCE SPECTACLE COMPANY
537 South Dearborn Street, Dept. SP-8, Chicago, Illinois

Free Catalog; 1000 Novelties, 64 Pages

Amazing catalog of 1,000 novelties. Animals, scientific supplies, hobby supplies, magic tricks, jokes, seeds, gadgets, Cameras, optical goods, movies, projectors, jewelry, disguises, musical instruments, stamps, coins, puzzles, fortune tellers, radio, auto & bike accessories, telescopes, magnifiers, banks, artists' supplies, printing sets, engines, motors, shockers, knives, billfolds, guns, books, rings, etc., etc. Send coin or stamps to:
JOHNSON SMITH & CO., Dept. B-319, DETROIT 7, MICH.

If Ruptured



Do What Others Now Do—

Wear a Form Fitting MILLER Truss

which provides natural freedom and comfort in working, walking, playing, horse back riding, dancing, swimming or sleeping. You just cannot afford to be without this protection and convenience.

Wear two weeks then consult your physician before deciding to keep it.

Write me today for **FREE** descriptive circular. Sent in plain, sealed envelope.

FRED B. MILLER Manufacturer
Dept. P.S. Hagerstown, Maryland.

LOW FACTORY PRICES!

...on the Sensationally NEW 1949

MIDWEST RADIOS

NEW SERIES 16 SUPER DE LUXE AM-FM CHASSIS

30 DAYS TRIAL

14½" PANASONIC SPEAKER

5 WAVE BANDS

EASY TERMS

58 OUTSTANDING FEATURES

Including the Exclusive Midwest

FLASH-O-MATIC Volume and Band Indication

TELEVISION Audio Switch-Over

FIDEL-A-STAT Color-Ray Tone Selection

TRI-MAGNADYNE Coil System

...Plus NO-DRIFT FM and many other features

Here is the last word in radio engineering . . .'a powerful, world-ranging, magnificently-toned radio that is unsurpassed for performance, selectivity, sensitivity, and advanced engineering features. Uses these latest-type tubes, rectifier and tuning indicator: three 7A7, three 7A4, two 7C5, one 7A6, one 7Q7, one 6BA6, one 6BE6, one 6C4, one 6AL5, one 5U4, one 6U5. Comes complete with satin stripe copper finish front panel attached, Magna-Tenna Loop Aerial and giant 14½" Electro-Dynamic Panasonic Speaker. Requires only a few minutes to install, plug in and play. LOW FACTORY PRICES . . EASY TERMS . . . 30 DAYS TRIAL. Send TODAY for FREE 1949 Midwest Radio Catalog of separate Chassis and beautiful Console and Table models.

A Complete Line of FINE RADIOS and RADIO-PHONOGRAPHS . . . Available in SEPARATE CHASSIS Like the POWERFUL SERIES 16 AM-FM Model above or in COMPLETE CONSOLES like this...

Beautiful SYMPHONY GRAND

AM-FM Radio-Phonograph with TELEVISION Audio Switch-Over and NEW Intermix AUTOMATIC RECORD CHANGER

A Magnificent musical instrument and a masterpiece of cabinet design—the finest Midwest Radio in 29 years of manufacture. Offers world-ranging radio reception and newest automatic Intermix Record Changing Phonograph. Uses Series 16 Super DeLuxe AM-FM Chassis. Giant 14½" Panasonic Speaker; Tri-Magnadyne Coil System; Built-In Loop Antenna. Other luxurious console and table model cabinets available with Series 16, 12, and 8 chassis—on Easy Terms and 30 Days Free Trial.

BUY DIRECT FROM FACTORY and SAVE!

MIDWEST RADIO & TELEVISION CORP.

Dept. 242 909 Broadway, Cincinnati 2, Ohio

Rush for Free Catalog!

FILL IN COUPON AND MAIL TODAY OR JUST SEND NAME AND ADDRESS ON 1c POSTCARD

MIDWEST RADIO & TELEVISION CORP.
Dept. 242, 909 Broadway, Cincinnati 2, Ohio

Please send me your new FREE 1949 Catalog. Please Print.

NAME _____

ADDRESS _____

CITY _____ ZONE _____ STATE _____

VETERANS Learn WATCHMAKING

Above Average Pay

No Age or Physical Limitation

In One of the Most Highly Respected Careers

Trained Men Always in Demand

•

Learn by our Advanced Training Method . . . Only Latest Scientific Equipment and Facilities.

Write Today for Complete Information and Catalog

JEWELRY ENGRAVING

Trades with Greater Security

KANSAS CITY SCHOOL OF WATCHMAKING

America's Most Progressive Horological School

619 WYANDOTTE ST. KANSAS CITY 6, MO.

A FINE BUSINESS. Make HOLLYWOOD STYLE

Cement pottery, birdbaths and garden articles, without moulds. Chemical coloring. Amazing designs. Dime brings pictures, color sample.

HOLLYWOOD CEMENTCRAFT
8527-F Wonderland Ave. Hollywood 46, Calif.

WANTED

PRACTICAL RADIOMEN

Your FCC License Is The Next Step Up!

Better radio jobs require an FCC license. We train and coach you in a few short weeks to get it, but you must have some practical experience, or be a graduate of basic home study or resident radio course. Send outline of your radio experience to get Free Book, "How to Pass FCC License Exams."

FREE BOOK

How to Pass FCC LICENSE EXAMINATIONS

Passed FCC Exam with Ease

"I am writing this letter with a million thanks to you and Nilson's Master Course. This course sure helped me pass the examination with great ease." —**Student No. 2714N12.**

MAIL NOW!

Cleveland Institute Of Radio Electronics
PS-9 Terminal Tower Cleveland 13, Ohio

Send me FREE book, "How to Pass FCC License Exams" (does not cover amateur license exams). I am enclosing an outline of my practical radio experience or training.

NAME .....

ADDRESS .....

CITY ..... STATE .....

[ ] Veterans check for G I enrollment information

NO OBLIGATION — NO SALESMEN

Drafting PAYS BIG

Learn in Spare Time—At Home or at Allied School in Chicago

KEY POSITIONS OPEN IN INDUSTRY

- MECHANICAL DRAFTING
- TOOL AND DIE MAKING
- TOOL DESIGN AND ENGINEERING
- MACHINIST TRADE
- PRODUCT DESIGN AND ILLUSTRATION

APPROVED FOR CIVILIANS AND VETERANS

Train Now! IN Nationally known, fully approved school and endorsed by industry . . . .

Write for Catalog
A 1c Postcard will do.

Established in 1928
FREE EMPLOYMENT SERVICE

• • •

ALLIED SCHOOL OF MECHANICAL TRADES
1338-1340-1342 So. Michigan Ave.
449 Allied Bldg. CHICAGO 5, ILL.

HYPNOTIZE ANYONE

Yes, anyone. Learn modern speed hypnotism. Self-hypnosis. Secrets revealed. Exciting experiments. Overcome inferiority complexes, smoking, alcoholism, stuttering, nailbiting, phobias, insomnia, stagefright. Improve your memory. Private & class instruction available at Institute.

Complete homestudy course $2

Hypnotism record album for Mass-hypnosis and Self-hypnosis $5

POWERS INSTITUTE OF HYPNOTISM, 1524 Wilshire Blvd., Dept. 48, Hollywood 14, Calif.

PORTABLE BENCH GRINDER $18.95 less motor and stones

Suitable for hobby shops and excellent for industrial work requiring heavy buffer or grinder. Rugged 100% steel construction. Life time sealed ball bearings. Adjustable tool rest easily fixed for face or side of stones. Convenient toggle switch. 12" between wheels allows wider range of work 6" x 1" x ½" stones—can be used until only 2" left. Can be permanently mounted or will rest firm without bolting.

Costs only $18.95, without motor or stones. ½ H.P. GE motor, 60 cycle, $21.89. Bench grinder stones to fit, $2.50 ea. Send check or money order. Shipped F.O.B. Pasadena, Calif. ORDER DIRECT, Today. **Write for Free Bulletin No. 21-A**

MODERN MANUFACTURING CO., 160 N. Fair Oaks, Pasadena 1, Calif.

★ PSORIASIS ★

PSORIASIS SUFFERERS: Has everything failed to bring even temporary relief from scales, lesions and itching? Then write today for FREE important information. You needn't invest one cent!

PIXACOL CO., Dept. S-9, Box 3583, Cleveland, Ohio

When PRAYER FAILS

The prayers of the most worthy people often fail. Why? The unworthy often have the greatest health, success, riches and happiness. The best, smartest, and most industrious people often have only pain, poverty and sorrow. Why? Thirty years ago, in Forbidden Tibet, behind the highest mountains in the world, a young Englishman found the answers to these questions. His eyes were opened by the strangest mystic he met during his twenty-one years of travels in the Far East. Sick then, he regained health. Poor then, he acquired wealth and world-wide professional honors. He wants to tell the whole world what he learned, and offers to send a 9,000-word treatise, FREE, to everyone who asks promptly. It is a first step to the POWER that KNOWLEDGE gives. There is no obligation. Write for YOUR FREE COPY today.

INSTITUTE of MENTALPHYSICS, Dept. 277-G
213 South Hobart Blvd., Los Angeles 4, Calif.

Learn BUILDING

AT HOME • All Blue Print Building Plans, Specifications, Lessons Furnished

FIND OUT ABOUT TRAINING AND OPPORTUNITIES FOR YOU IN BUILDING

Established in 1904, Chicago Technical College offers you thorough, practical training in Building, by home-study. Mail coupon for free information. See what this Course has done for others, what it can do for you. Read what Chicago Tech graduates say about their work, earnings, success. Learn the rewards awaiting **you as a trained builder—and how quickly, easily you can get started. Simply MAIL COUPON TODAY in an envelope or paste on a penny postcard.**

Earn more money as a building tradesman. Prepare for advancement and increased pay as a building foreman, superintendent, inspector, estimator, material buyer or salesman. Train to be a building contractor, have your own money-making business in this busy, prosperous building field.

More than 19 million new homes needed in U.S., say experts. New building now at rate of one million homes a year, plus 200,000 **commercial buildings, plus expanding farm building construction.**

Mail coupon today. FREE book tells how you learn Building Construction—How to Read Blue Prints, and Estimate Building Costs—at home in your spare time. Learn modern construction methods and materials, how to lay out work and direct all building operations. This is the training needed for rapid advancement to higher-paid jobs, or your own successful building business.

MAIL COUPON NOW

CHICAGO TECHNICAL COLLEGE
M-158, Tech Bldg., 2000 S. Michigan Ave., Chicago 16, Illinois

Mail me FREE building Lesson with information about big opportunities in BUILDING and how I can train at home.

Name.....Age.....

Address.....

City.....Zone.....State.....

CHICAGO TECHNICAL COLLEGE
M-158, Tech Building, 2000 South Michigan Ave. Chicago 16, Illinois

EVEN IF YOU DON'T KNOW A NOTE OF MUSIC NOW...

You Can Learn Your Favorite Instrument This Easy A-B-C Way

No special talent, no previous musical training needed. This remarkable U. S. School home-study method is so successful because you learn to play by playing real tunes by note, right from the very start.

Once you start a U. S. School Course you look forward to the time you spend on your lessons. No tiresome exercises. No long-winded explanations. Instead of hard work, learning to play becomes a happy pastime. You begin with simple melodies. As you improve, you take up more advanced tunes. Sooner than you ever dared hope you're thrilled to find yourself playing many popular numbers by note. And no matter which instrument you take up, the cost is only a few pennies a day.

If you honestly want to learn music, to be invited everywhere, and get lots more fun out of life, send in the coupon below for our FREE 36-page Booklet and Print and Picture Sample. They give full details. (Instruments supplied when needed, cash or credit.)

U. S. SCHOOL OF MUSIC
89 Brunswick Bldg., New York 10, N. Y.
(50th Successful Year)

50th Anniversary

FREE! *Print and Picture Sample*

U. S. School of Music, 89 Brunswick Bldg., New York 10, N. Y.
Please send me free booklet and Print and Picture Sample. I would like to play instrument checked below.

Piano	Saxophone	Modern Elementary Harmony
Guitar	Trumpet, Cornet	Clarinet
Violin	Reed Organ	Other Instrument
Piano Accordion	Tenor Banjo	

Name.....
(PLEASE PRINT)
Street.....
City.....State.....

Learn this Profitable Profession

IN 90 DAYS AT HOME

Money-Making Career Open to Men and Women, 18 to 50

Hundreds of men and women between 18 and 50 make $10 to $20 in a single day giving scientific Swedish Massage and Hydro-Therapy treatments. There is big demand from doctors, hospitals, sanatoriums and clubs. Graduates earn large full time incomes from these or in private practice in their own offices. Others make good money from home treatments given in spare time. Learn this interesting, money-making profession in your own home, through our home study course. Same instructors as in our nationally known resident school. You can win independence and prepare for future security by qualifying for your Diploma. Course can be completed in 3 to 4 months. Many earn while they learn. Begin your training at once.

Anatomy Charts & Booklet FREE

Enroll now and we will include, at no extra cost, many needed supplies. Fit yourself to help meet growing demand for Scientific Swedish Massage. Send the coupon at once for complete details, Anatomy Charts and 32-Page Illustrated Booklet, FREE, postpaid.

THE COLLEGE OF SWEDISH MASSAGE
Dept. 870-L, 100 East Ohio St., Chicago 11, Illinois

Please send me FREE and postpaid, Anatomy Charts, 32-page Booklet and complete details on Home Training.

Name _____

Address _____

City _____ State _____

AIR RIFLES **BENJAMIN** AIR PISTOLS

PIONEERS - LEADERS

SEND FOR FREE FOLDER OF LATEST MODELS TODAY

If you want a REAL GUN for PRACTICAL USE inside or outdoors get a SAFE - CLEAN - ECONOMICAL - BENJAMIN with Adjustable Power and Amazing Accuracy. For BEST RESULTS use BENJAMIN H-C PELLETS. WRITE AT ONCE.
BENJAMIN AIR RIFLE CO., 811 MARION ST., ST. LOUIS 4, MO.

BE A SUPERVISOR

Franklin Technical Institute Helps Young People Get Ahead

• The door to well-paid supervisory jobs in industry is wide open — to the man or woman with specialized technical training. 50,000 graduates of this Boston school have gone out to good jobs in engineering and technical fields.

Practical two-year day courses in industrial electricity and electronics, industrial chemistry, mechanical and machine design, structural and architectural design, automotive service and management, electric wiring and maintenance. Also preparatory and evening classes. G.I.-approved. 40th year.

FRANKLIN TECHNICAL INSTITUTE
39 Berkeley St. Boston, Mass.
Please send free information on all courses.

Name _____ Age _____

Address _____

City _____ State _____

Trained Men Get the Better Jobs in the Automotive Industry

PRACTICAL SHOP TRAINING

in AUTOMOTIVE MECHANICS BODY and FENDER REBUILDING

If interested write or wire

ATLANTA MOTIVE TRADES INSTITUTE Dept. C, 254 IVY St., N.E. Atlanta, Georgia

Member of the Southern Association of Private Trade Schools

Veterans ask about G I Training

LAW STUDY AT HOME for Personal Success and LARGER EARNINGS. 39 years expert instruction—over 114,000 students enrolled. LL.B. Degree awarded. All text material furnished. Easy payment plan. Send for FREE BOOK NOW—"Law and Executive Guidance."

AMERICAN EXTENSION SCHOOL OF LAW
Dept. 93-PS 646 N. Michigan Ave. Chicago 11, Ill.

Sensational Discovery

1 Qt. Homogenized Milk can be churned into approx. 2 lbs. Country-Style Butter following our formula. Takes just a few minutes with egg-beater. It's amazing. Formula sells like hot-cakes. Independent operators wanted. Particulars free. Sample formula $1.00.
BUTTERFORM CO., 1404 Mitchell St., Oakland 1, Calif.

HOTTER GAS TORCH

100% PRIMARY AIR KELLER GAS TORCH
Burns Regular House Gas (Natural Gas Only)— No Compressed Air, No adjusting Needed— Develops 2100 F.
$3.45 Postpaid

Guaranteed to silver solder, light brazes, solders, removes paint rapidly. Precision-engineered. 1500 B.T.U. per hour.

Order today C.O.D. from
KELLER GAS APPLIANCES
P. O Box 261 Monrovia, California

Only $16.95 Complete

DUAL PURPOSE SPRAY GUN

Uses Only 25 lbs. Air Pressure
FLOCKS and SANDBLASTS

AT HOME: You can refinish Lamps, Radios, Book Ends, Statues and hundreds of things with lovely colorful flocking. ETCH GLASS: Many designs and initials can be sandblasted on shower doors, ash trays, glassware. AUTO INTERIORS: Transform ugly dirty auto interiors to "new car beauty" with a BLASTO DUAL PURPOSE SPRAY GUN. Merely spray flock similar to Velvet, Plush, Suede and Mohair inside your car. ANTIQUE WOOD . . . REMOVE PAINT. MAKE EXTRA MONEY by doing any or all the above for profit. BLASTO is highest quality and carries a 5 day money-back guarantee. Operates on small air compressor. Send $16.95 cash, check or money order for postpaid delivery. Write for free information. Full line of Flocking Supplies.

BLASTO SPRAY GUN MFG., Dept. PS-9, 7067 Haas Ave., Los Angeles 44, Calif.

RUPTURED?

Get Relief This Proven Way

Why try to worry along with trusses that gouge your flesh—press heavily on hips and spine—enlarge opening—fail to hold rupture? You need the Cluthe. No leg-straps or cutting belts. Automatic adjustable pad holds at real opening—follows every body movement with instant increased support in case of strain. Cannot slip whether at work or play. Light. Waterproof. Can be worn in bath. Send for amazing FREE book, "Advice To Ruptured," and details of liberal truthful 60-day trial offer. Also endorsements from grateful users in ybur neighborhood. Write:

Cluthe Sons, Dept. 14, Bloomfield, New Jersey

AMERICA'S GREATEST ELECTRICAL SCHOOL OFFERS YOU

MORE EQUIPMENT! MORE SPACE! MORE TRAINING!

OVER 1000 PIECES of ACTUAL ELECTRICAL EQUIPMENT to WORK ON!

Learn ELECTRICITY

In NATION'S LARGEST EXCLUSIVE ELECTRICAL SCHOOL

It's Easy - "LEARN-BY-SEEING" MOVIES
It's Fast - "LEARN-BY-DOING" METHODS

and its THOROUGH! . . . There is *no other place—no other way* to get the same all-around training you get at M.T.I. NOT A HOME STUDY COURSE! . . . You get actual "hands-on-equipment" training in great MODERN SHOPS in Detroit. No previous experience necessary. Learn HOUSE WIRING, A.C., D.C. MOTORS, ARMATURE WINDING, POWER PLANT WORK, etc. New classes start every few weeks. Part time work available. Living arrangements made.

NO COST TO VETERANS *Train at Gov't. expense. Receive $75 to $120 month while learning Coupon brings details.*

MICHIGAN TECHNICAL INSTITUTE

MAIL TODAY FOR QUICK ACTION!

MICHIGAN TECHNICAL INSTITUTE, Dept. PS-9
2281 W. Fort St., Detroit 16, Michigan

☐ Send me catalog and complete information.
☐ I am a GI. Send special information.
☐ Married ☐ Single

NAME _____
ADDRESS _____
CITY _____ ZONE ____ STATE ____

MAKE $$$$

PLASTICS OFFERS YOU A GREAT FUTURE!

BECAUSE MORE AND MORE PRODUCTS ARE BEING MADE OF PLASTICS!

LOOK AT THESE INDUSTRIES!

AUTOMOBILE · CONSTRUCTION · ELECTRICAL · TEXTILE · SPORTING GOODS · RUBBER COMPOUNDS · LEATHER · MARINE · GENERAL MANUFACTURING

ON AND ON—through industry after industry—thousands of useful, practical, everyday products made BETTER and CHEAPER from some kind of PLASTIC. That's why men and women *trained* in Plastics can qualify for a great future. YOU CAN GET THIS TRAINING NOW AT PLASTICS INSTITUTE, the world's largest and finest school devoted exclusively to Plastics.

You can enroll for Plastics Institute's famous Home Study Course which prepares you for a career in plastics while you carry on your present activities. Or come to California for Resident Training in P.I.T.I. shops and laboratories.
START YOUR TRAINING NOW—Mail coupon below for complete details of Plastics Institute's training developed under guidance of industry leaders. No wasted time or padded lessons. You learn quickly, easily.

YOU MAKE THINGS—Home study students get practical kit materials. You make handsome, useful articles. You form, dye, decorate, cast and laminate various types of plastics. You get experience designing and developing your own ideas.

STUDY AT HOME or **AT PLASTICS INSTITUTE'S RESIDENT SCHOOL IN LOS ANGELES, CALIFORNIA**

APPROVED For Veterans — **AVAILABLE** For Non-Veterans

PLASTICS INDUSTRIES TECHNICAL INSTITUTE

• NEW YORK • CHICAGO • LOS ANGELES •

Plastics Industries Technical Institute,
1601 S. Western Ave., Los Angeles 6, Calif. PS-98
Gentlemen: Please send me literature and information on your
Resident School Courses ☐ Home Training Courses ☐

Name ..... Age..
Street ..... Zone....
City ..... State.....
Veteran. ... Non-Veteran ..... Previous Education .....

Be Your Own Boss

IN A FEW SHORT WEEKS

You Can Learn A Skilled Trade

WE CAN TRAIN YOU FOR YOUR OWN BUSINESS

- ✓ Refrigeration and Air Conditioning
- ✓ Heating Layout, Installation, and Servicing

NOT A HOME STUDY COURSE

Train for a business of your own in the large Cleveland shops of Boston Tech. Both Refrigeration and Heating are growing industries. Trained men are needed badly. Little capital is needed to start your own business. Find out how you, too, can prepare for bigger pay, security, a business of your own. Mail coupon now for free book!

FREE

Work On Real Equipment

Your training is practical. You learn by doing actual jobs on equipment used in the industry. No previous experience is needed. Approved for veteran training. Low terms, easy payments for non-vets. Get our free book. Mail coupon now.

MAIL NOW

BOSTON TECHNICAL INSTITUTE, INC.
Dept. PS-9, 4707 Euclid Ave.
Cleveland 3, Ohio

Send FREE Success book on course checked below:

[ ] Refrigeration and Air Conditioning
[ ] Heating Layout, Installation, and Servicing

NAME .....
ADDRESS .....
CITY ..... STATE .....

Please Check [ ] Vet [ ] Non-Vet

POST LANTERN

ONLY $7.50

17" high 8" wide for 3" post. Equipped with lamp, chimney, and flame type bulb.

Finished in Flat Black

LAKE STATE STEEL PRODUCTS
OTSEGO 1, MICHIGAN

New Advertising Machine

PRINTS and ILLUSTRATES

1¢ POST CARDS

Send Coupon

CARDMASTER CO., 4546 Ravenswood
DEPT. 169. CHICAGO 40, ILL.

Send FREE Illustrated Book* and **FREE!** complete, unique advertising plans and money making ideas for my business.

* Shows HOW thousands of business men in every line are boosting sales in spite of conditions with 1c messages printed and illustrated in few minutes on gov'nt post cards—with amazing, new, patented CARDMASTER. Your "today's" ideas, read by your prospects next morning. Not a toy, but a sturdy advertising machine built to last years. Sold direct at low price. Guaranteed five years. SEND NAME TODAY. All FREE!

NAME _____
ADDRESS _____
CITY _____ ZONE _____ STATE _____

OWN a Business

CLEAN AND MOTHPROOF RUGS AND UPHOLSTERY

Service rendered "in the home," office or public buildings. Gross profits up to $15 and $20 a day on EACH of your service men. Easy to learn . . . quickly established. No experience needed. We'll help finance you!

DURACLEAN cleans by *absorption!* No scrubbing, soaking or shrinkage. Dirt and grease vanish as if by magic . . . matted pile rises . . . colors revive. Everything completely dry in just a few hours. Fabrics look newer, last longer. You use patented electrical equipment.

DURAPROOF kills moths and carpet beetles. Makes materials resistant to both. To our knowledge, the *only* moth proof service backed by a National Money-Back, 4 YEAR WARRANTY! Guards against mildew too.

Services Nationally Advertised. We furnish enough material to return your TOTAL investment. Start full or part time. No shop needed. Territories are limited. Write today for **Free** Booklet explaining details and Easy Terms!

See our full page "ad" in September House & Garden

DURACLEAN CO. 18-9CT DEERFIELD, ILLINOIS

Now . . . you can quickly and easily Modernize Tables, Sink Tops, etc. with

POLATEX PLASTIC TOP

This decorative plastic laminate comes in hard, tough sheets 1/16 in. thick. The same durable surface you've seen on better restaurant and kitchen tables and cabinets . . . where constant usage is demanded. Ideal for splash panels in kitchen or bathroom. Many other uses. Easily installed. Gives a smooth, sparkling surface . . . resistant to stains, abrasion, alcohol or cigarette burns.

Beautiful red, tan or blue linen patterns. Instructions for easy application included.

Price per 36 x 40 Sheet $7.95

Shipped prepaid (west of Rockies add 50c per sheet.) Five or more sheets $7.25 ea. Send check or money order.

Distributors wanted **POLAMOLD PRODUCTS, Springfield, Ohio**

with amazing **Radio Mike.** Just like famous radio and screen stars. Put on your own Broadcasts. "Cut In" on any regular radio program. Amaze your family and friends. Excellent Radio Training—Real Fun Too—at parties, meetings, etc. Over 6" high—*beautiful metallic plastic.*

SEND NO MONEY *just* pay postman $2.98 C.O.D. plus postage on arrival or send $2.98 for postpaid delivery. Easy to Hook Up—Full Instructions Given. Order your Radio Mike Today! NOW.

MIDWAY SALES COMPANY, Dept. MPS-9, Kearney, Nebr.

CANVAS COVERS Waterproof tarpaulins, war surplus (Used), perfect condition. Originally made for tents. Approx. 5'x8'. Two buttoned together make approx. 80 sq. ft. Complete with buttons attached. Suitable for use as canvas dams, hay covers, truck covers, machinery and equipment covers, etc. Packed in bales of 30, priced 30 covers, $1.25 ea; 15 covers, $1.50 ea. Less than 15, $1.75 ea. All FOB, Kansas City.

AMERICAN SUPPLY CO.
329 W. 5th Dept. P. S. Kansas City, Mo.

LOOK for Rupture Help

Try a Brooks Patented Air Cushion appliance. This marvelous invention for most forms of reducible rupture is GUARANTEED to bring YOU heavenly comfort and security—day and night—at work and at play—or it costs you NOTHING! Thousands happy. Light, neat-fitting. No hard pads or springs. For men, women, and children. Durable, cheap. **Sent on trial** to prove it. Not sold in stores. Beware of imitations. Write for Free Book on Rupture, no-risk trial order plan, and Proof of Results. Ready for you NOW!

BROOKS APPLIANCE COMPANY
Dept. 163-C State St. Marshall, Mich.

Yes, Frank D. Payne made an Important Decision

• You can easily put yourself in the place of F. D. Payne. He is just one more C.T.I. man who today looks to the future with confidence. He doesn't expect to become a millionaire as a result of his training, and he doesn't like to be high-pressured or kidded about his future any more than you do. But what he did want when he clipped the coupon and mailed it in for the C.T.I. booklet was a good job, a chance to show what he could do—and perhaps the opportunity to go into business for himself. Now, a C.T.I. graduate, he writes as follows: "I've installed over sixty-five tons of air conditioners, and no telling how many bottle boxes, meat displays, deep freezes . . . I'm on a month's vacation at the present and I plan to go into my own business . . . C.T.I. put me on the road and I think it will for others . . ."

We believe the same opportunities that were within the reach of this C.T.I. man are within the reach of other ambitious men. We can give you the same help we gave him. We invite you to send for our FREE booklet and other information. The request for information does not obligate you in any way. MAIL THE COUPON TODAY. INVESTIGATE BEFORE YOU INVEST.

VETERANS—Just mail coupon, we will handle all details.

NON-VETERANS—Don't let the lack of ready cash prevent you from taking this training now. Investigate our Low Easy Payment Plan and our Pay After Graduation Plan.

Mail Coupon for FREE Booklet

Train at Home or in Big C. T. I. Shops

Home of C.T.I.

Large, modern, well equipped shops. Located in excellent residential district only 1 block from Lake Michigan.

COMMERCIAL TRADES INSTITUTE, Dept. E1-9
1400 W. Greenleaf Avenue, Chicago 26, Illinois

FILL OUT · CUT OUT · MAIL TODAY!

FACTS FREE FOR MEN WHO WANT TO GET AHEAD
COMMERCIAL TRADES INSTITUTE, Dept. E1-9
1400 W. Greenleaf, Chicago 26, Ill.

Send free illustrated Brochures and other information about the field I have checked below.

- ☐ Refrigeration and Air Conditioning
- ☐ Electricity ☐ Diesel Mechanics
- ☐ Radio Servicing
- ☐ Drafting
- ☐ Automotive Mechanics
- ☐ Body & Fender Rebuilding
- ☐ Building Construction
- ☐ Television

Name.....

Address.....

City.....State.....

☐ Veteran ☐ Non-Veteran

$350 IN A SINGLE WEEK GROSS IN MY OWN BUSINESS

Some Make More . . . Some Less . . .
Start This Business for ***YOUR OWN***

FREE BOOK! MAIL COUPON

VON SCHRADER MFG. CO.
B63, Racine, Wisconsin

Send at once (no obligation) your FREE booklet containing information about your Electric Upholstery Cleaner and how I can own my own permanent, profitable business.

Name_____

Address_____

City_____ Zone____ State_____

George Held earned $350 in one week with

ELECTRIC UPHOLSTERY CLEANER

• Here's YOUR chance to start a money-making, year-'round business of your own and make the success you've dreamed about. R. O. Donnley took in $40 in seven hours. O. W. Ware landed a $750 hotel job and made a fine profit. J. S. Corbit grossed $279.50 his first month. P. D. Ash cleaned 23 auto seats at $5 each in one week. And so it goes. Homes, hotels, offices, clubs, all places where furniture is used, offer you big profit possibilities. Auto seats and interiors, also.

NO SHOP OR OFFICE NECESSARY

You clean furniture on customers' premises. No hauling costs. No high rents. Supplies are inexpensive and you operate, at low cost, from your home. What you take in is mostly profit. Surely YOU will want to investigate an opportunity like that—right away. Own your own business. Be your own boss. If you are ambitious, honest and courteous, we will help you to start and succeed.

FULL INFORMATION FREE
MAIL COUPON TODAY

Send the coupon or write for Furniture Cleaner Booklet. It tells all about this *electric* cleaner—how to start YOUR business—how to make a profitable success. Don't delay. It's your BIG opportunity.

MAIL COUPON TO **VON SCHRADER MFG. CO., B63, RACINE, WIS.**

NOW! Build Your Future On DIESEL Opportunities

LOOK around you. See the way tractors, trucks, buses, railroads, ships, power plants and equipment of many kinds are "going Diesel." Every day new opportunities are opening—in industrial and farming communities—for trained men who can install, maintain, operate and repair Diesel engines. Plan now to build your future in this growing field.

Diesel Knowledge is Earning Power

You don't have to give up your present job. Now, you can begin learning DIESEL in spare time at home. UEI practical training teaches you, step by step, how Diesel engines operate, how fuel systems work, repairs, accessories and auxiliary equipment; a world of Diesel "know how." Includes actual practice on Diesel equipment in our shop under expert guidance. UEI training methods are successful. For 20 years they have helped mechanically inclined men better themselves.

Send Coupon for FREE FACTS

NOW IT'S UP TO YOU!

Coupon below brings you all the facts without cost or obligation. Get going today! MAIL COUPON NOW.

UTILITIES ENGINEERING INSTITUTE
Diesel Division
2521 Sheffield.
Dept. 398-D
Chicago 14, Ill.

Founded 1927

UTILITIES ENGINEERING INSTITUTE, Diesel Division
2521 Sheffield, Dept. 398-D, Chicago 14, Ill.
Please send me Free Facts about Diesel opportunities and training.

NAME _____ Age _____

ADDRESS _____

CITY _____ Zone or County _____ STATE _____

☐ Check here for special information if you are under 17.

BUILD YOUR OWN Five Second AUTO BED

Complete step-by-step plans, and photographs make it easy. Utilize present car seats. Changes from driving position to bed in FIVE SECONDS. No pins, bolts or blocks. Over 5,000 in use. State year, make and model. Cash, Check or money order. Only $3.50 per set.

Top Shops, Garages—Make Money Start a new sideline. Make Auto Beds. Big profit item. Write for prices on complete set of plans and photos for all makes and models.

AUTO BED SHOP, Dept. PS-9, 4554 Eagle Rock Blvd., Los Angeles 41, Calif.

LEARN ACCOUNTING SALESMANSHIP SECRETARIAL WORK

Assure Your Future Now!

Hill's, one of America's outstanding Business Schools, offers you the opportunity to enter one of the three fields acknowledged to hold substantial earnings and a secure future. Our FREE book, "Through Hill's to Success," tells how and where the best positions are found and how you can qualify for them by study at home or in our resident school. We have thousands of successful graduates and maintain nationwide employment service.

FREE WRITE TODAY

USE THIS HANDY COUPON

HILL'S EXTENSION SCHOOL, Dept. PS-9
AND BUSINESS UNIVERSITY,
619 W. Main St., Oklahoma City 2, Okla.
Please send me your Free book, "Through Hill's to Success."

NAME _____

ADDRESS _____

CITY _____ STATE _____

☐ Check here if eligible under G.I. Bill.

Ball-Bearing SPEED WHEELS



Juvenile wheels, solid tire—No Bearings

7" wheels	60c
6" wheels	50c
4" wheels	30c
Semi-pneumatic tired wheels	
12 x 1.75"	$3.25
10 x 1.75"	$2.75
10 x 1.25"	$2.00
8 x 2"	$2.00
Industrial wheels for heavy loads	
Semi-Pneumatic	
400 x 8, 2 ply tire and tube	$12.50
10 x 2.75" Hollow Core	$6.75
10 x 2.75" Single Tube	$7.25
12 x 3.00 wheel bolted hub	$9.75
8 x 2.50"	$4.90
6 x 2" spot welded	$2.80
6 x 2" lug base @	$3.30
8"x2.00 bolted wheels	$4.75 ea.

Dealers and Manufacturers inquiries invited

Free blueprints with all wheel orders.
Send check with order. Shipments f.o.b. Akron.

JIM BROWN TOY COMPANY
1093 Home Ave. Akron 10, Ohio

TRAIN REPAIRS



We specialize in toy train repairs. Any make or model, foreign or domestic. Mail or express orders cared for promptly.

SPOONLEY
"The Train Man"
37 Choate Ave., Buffalo 20, N. Y.

BEARINGS

Fafnir, S.K.F., N.D. & Torrington

Bore	O.D.	Type	Price
5/32"	5/8"	Ball	.15
3/16"	1/2"	Needle	.15
3/16"	5/8"	Ball	.15
1/4"	5/8"	Needle	.15
1/8"	3/4"	Ball	.22
1"	1 1/4"	Needle	.28
1 3/4"	3"	Ball	.90

Minimum order 10 bearings. Add 10c for postage.

JAY-CEE SALES CO.
4354 Grand River Ave. Detroit 8, Mich.

Learn MASONRY CARPENTRY

Write for "Free" Catalog

Big money in the building trades. Learn now while opportunities are greatest. Train in our completely equipped shops under expert instructors, or by Home Study. Vets attending school entitled to G.I. Benefits.

MIDWEST SCHOOL OF BUILDING TRADES
Dept. PS-9 411 N. Center Street Bloomington, Ill.

NEW! MINIATURE DUST MASK

Wear when sanding, grinding, paint spraying, sweeping, dusting, furnace cleaning, etc. Handy as a pair of glasses. Just keep mouth closed and breathe through nose is all you do to operate. Protects against dusts, lint, coal, cement, grain dust, HAY FEVER POLLEN. Has 9 sq. in. filter. Order today.

Order Today $1.00 POST PAID

JERRY BRYANT, Dept. PS, 919 N. Michigan Ave., Chicago 11, Ill.

EYE GLASSES BY MAIL

INCLUDED: Eye Glass Case, Wiper, Eye Glass Cleaner with each order! **30-DAY TRIAL OFFER. NEWEST STYLES. POSITIVE MONEY-BACK GUARANTEE.** Write today for **FREE** Catalog, Low Prices, Scientific Sight Test Chart!

Broken Lenses Replaced — 48-Hr. Service.

LOW AS $1.95 AND UP

LEE EYE GLASSES CO., Dept. Q-11 SEND NO MONEY
4148 Easton - St. Louis 13, Mo.

MICROSCOPES SUPPLIES-ACCESSORIES & SCIENTIFIC INSTRUMENTS

BEL SPENCER NEW & USED LEITZ ZEISS
BOUGHT-SOLD-EXCHANGED-REPAIRED
MEDICAL INDUSTRIAL AMATEUR
Send for FREE LIST
NATIONAL SCIENTIFIC INSTRUMENT CO. 119 CHAMBERS ST. NY 7

SPECIALIZE
In 6 Months to 3 Years
COURSES

SERVICE
6 to 12 Months
- Electricity
- Welding
- Refrigeration
- Heating

TECHNICIAN
1 to 2 Years
- Electricity
- Radio
- Electronics
- Refrigeration, Heating, and Air Conditioning

PROFESSIONAL
3 Years
- Electrical Engineering Bachelor of Science Degree
  Major in Machinery or Electronics

PRACTICAL TECHNICAL TRAINING

Train for a substantial career in industry . . . or a business of your own. Our time-tested Concentric System enables you to build your career step by step. Each 6-month course is complete in itself, yet prepares you for advanced courses. Stay as long as circumstances permit—until you reach the top step in your technical training. More than 1,538 students now enrolled from 48 states and 13 overseas countries. Faculty of 72 specialists. World-wide alumni counselor committee. Terms start Jan., April, July, Sept. SEND COUPON TODAY!

MILWAUKEE SCHOOL OF ENGINEERING
"A Technical Institute—Founded 1903"

Milwaukee School of Engineering
PS-948, N. Broadway and E. State, Milwaukee, Wis.
Without obligation, send me free booklet "Career Building" and more details on course in .....
Name ..... Age .....
Address .....
City ..... State .....

GET INTO BUSINESS for YOURSELF

meet the demand for...
Metalized **BABY SHOES**
...in your own home in spare time

WE HELP YOU • STEP BY STEP!

- **HOW TO START**
- **HOW TO BRING THE BUSINESS**
- **HOW TO METALIZE THE WARNER WAY**
- **HOW TO PYRAMID PROFITS**

This is a lifetime opportunity! No matter what you're doing now, you can get set for the future while beating today's high cost of living. Our plan offers everything you need to know . . . a completely charted path to personal independence — with your home as your "factory."

This tested and proved plan is working right now. Backed by an old company, it's sent to you on a No-Risk Trial, Money-Back Guarantee!

The exclusive Warner Method applies an actual coat of pure metal, in genuine Gold, Silver or Bronze finish, "Eternalizing" Baby Shoes and other keepsakes forever. The demand for these Metalized Keepsakes is big . . . and getting bigger every day. (More than a million dollars' worth last year.) In every way, it's a proved proposition. Proud parents everywhere buy on sight!

A NEVER ENDING MARKET

No matter where you live, small town or big city, there is a never ending, ready-to-buy market for "Eternalizing" Baby Shoes — more than 3,500,000 babies this year. This tested plan reaches out and brings in the business. Spare or Full Time, you can make money!

BE YOUR OWN BOSS

Get the facts on this new opportunity. Mail the coupon below . . . TODAY. We'll send you fully descriptive literature, on our No-Risk Trial and Positive Guarantee: "Money Back If You Say So."

Isn't This What You Are Looking For!
1. Steady Income
2. Permanent Future
3. Wide-open Market
4. No House to House
5. Plan Works for You
6. Backed by 25 Year Old Company
7. No-Risk Trial
8. Money-Back Guarantee

SEND THIS COUPON NOW, FOR SURE!

WARNER ELECTRIC COMPANY, Dept. 29
1512 Jarvis Ave., Chicago 26, Illinois
Please send, without obligation, complete details about your No-Risk Trial, Money Back Plan for "Eternalizing Baby Shoes for Plus Profits."
NAME _____
ADDRESS _____
CITY _____ ZONE ____ STATE _____

WARNER ELECTRIC COMPANY, Dept. 29
1512 JARVIS AVE. CHICAGO 26, ILLINOIS

Do you want

..to go to College?

..or to enter a Profession?

(Such as Accounting, Architecture, Nursing, Dentistry, Teaching, Social Work, Osteopathy, Beauty Culture, Optometry, Embalming, Chiropody, Law, Medicine, etc.)

..or get an Office Position?

To get anywhere, you practically MUST finish High School FIRST. You can complete our simplified High School Course in SPARE time at home, as FAST as your time and abilities permit. Equivalent to resident school work—prepares you for college, pre-professional examinations, business, industry. Standard texts furnished. Diploma. Credit for H.S. subjects already completed. Single subjects if desired. Low tuition, easy terms. American School, Chicago, est. 1897—endorsed by educators. Finish your high school education NOW. Write TODAY!

High School Course at Home

Many Finish in 2 Years

American School, Dept. H646, Drexel Ave. at 58th St., Chicago 37

Gentlemen: Send me FREE information covering special training in subjects checked below. No obligation on my part.

- ☐ High School Course
- ☐ Electronics, Industrial
- ☐ Architecture and Building
- ☐ Automotive Engineering
- ☐ Business Management
- ☐ Electrical Engineering
- ☐ Elec. and Gas Refrigeration
- ☐ Air Conditioning
- ☐ Railway Training
- ☐ Diesel Engineering
- ☐ Drafting and Design for Men and Women
- ☐ Plastics
- ☐ Private Secretary
- ☐ Mechanical Engineering
- ☐ Aviation
- ☐ Salesmanship
- ☐ Radio

Name .....

Address .....

ELECTROPLATING

SECURE YOUR FUTURE!

Amazing new developments make Modern Electroplating a wide open, wonderfully fascinating, profitable field! Get the *professional "know-how,"* you need to enter this uncrowded money-making industry, quickly and simply, in your spare time, from an INTERNATIONALLY RECOGNIZED AUTHORITY. It's easy when I show you how! Write for my FREE illustrated booklet of interesting scientific facts about Modern Electroplating, today!

JOSEPH B. KUSHNER, B.S.CH.E. CONSULTING ELECTROPLATING ENGINEER, STROUDSBURG 21, PENNA.

OPPORTUNITIES

Say You Saw It In Popular Science

Drive Relaxed! WITH HANDE-FEED *Finger-Tip* GAS CONTROL

MINIMIZES DRIVING FATIGUE. RELIEVES and RELAXES THE FOOT. Fits steering post of any car. Connects directly to carburetor. Simply lift lever to increase engine speed; when released, engine idles. Pivots for use with right or left hand. Does not interfere with gear shift or steering, or cut out foot accelerator. Easy to install, do it yourself in about 15 min. Instructions with every unit. Chrome finish. Only $5.95 postpaid if you send M. O. or check. C. O. D.'s plus postage.

PAT. PEND.

ASK YOUR DEALER—OR ORDER DIRECT. We pay postage if you send remittance with order.

$5.95 POSTPAID

TRANS-CONTINENTAL INC. DEPT. 1 BOX 3812 ST. LOUIS MO.

MENS FULLY GUARANTEED *NEW* 15-JEWEL WRIST WATCH $13.95 PLUS TAX

ORIGINALLY *sold up to* '55

Sacrificed because they're post-war surplus

WATER PROOF—SHOCK PROOF

Luminous dial...sweep second hand... waterproof . . . shockproof . . . anti-magnetic . . . imported Swiss precision movement and case. You get them now for a small fraction of original prices. Don't delay! Order now . . . while they last. **Send only $1** down payment with order. Pay balance to postman on arrival, plus postage. Or we pay postage if you enclose $13.95 plus $1.39 Fed. Tax. **Receive Reg. $2 expansion band FREE** with prepaid order. Money back in 5 days if not delighted. Order now.

MARYLAND DISTRIBUTORS, DEPT. 114
501 E. Baltimore St. Baltimore 2, Md.

Make Funny Money!

SELL COMIC Christmas, Everyday Greeting Cards. *Published for people with a sense of humor!* Rip-Roaring Laughs! Quicker Cash Profits. Hilarious Boxed Assorts. FREE samples.

NOVO PRODUCTS, Dept. PS-1
1757 No. Park, Chicago, Ill.

NEW! DIFFERENT! Unlike Any Other Cards

MAKE MONEY

this easy way at home

Make your own costume jewelry. Easy, pleasant, interesting. No experience needed. We supply settings and sparkling, imported rhinestones in many colors at wholesale prices. Big market for costume jewelry gives you steady profits. Write for details now.

Sparkle Mart, Dept. C, 475 Fifth Avenue, New York



For the amateur and professional artist and sculptor. Giving detailed study of every part of the body.

"The Book They're Talking About"

Contains over 300 illustrations, charts and notes

ART ANATOMY OF THE HUMAN FIGURE

MALE AND FEMALE, POSED AND IN ACTION

(Sent in plain wrapper.) Outside of U. S. A. Send $1.75

ONLY $1.50

Major Book Co., Dept. 520-C, 5225 Hollywood Blvd., Hollywood 27, Calif.

THESE 5 TRADES ASSURE YOU

HIGH PAY • Future Security

- **PLUMBING** Every phase of plumbing. Pipe-Cutting and Threading. Lead-Wiping. Rough-in Projects on Installations. Completed Installations of entire plumbing systems. Blueprint reading. Estimating.
- **DRAFTING** College level courses in General Machine and Architectural Drafting, with fundamentals in Drafting Mathematics—all undet graduate engineers.
- **SHOE REPAIRING** From simplest repairs on boots and shoes to the finest details of reconditioning and rebuilding, under expert craftsmen.
- **ELECTRICAL** Technical and shop training include Basic Electricity, Residential Wiring, Industrial Wiring, General Testing and Trouble Shooting, and Appliance Repair.
- **AUTOMOTIVE & TRACTOR** Applied training on latest model automobiles and tractors, including engine overhaul, transmission and differentials, carburetion, generator and ignition systems, engine tune up, Hydramatic and Vacamatic Transmissions, and general service.

"There's Always a Demand for the Man who KNOWS!"

CHOOSE ONE OF THESE 5 LEADING TRADES

Get Out of that Rut. Be a Skilled Tradesman! Have a Lifetime Career . . . Own Your Own Business and Be Secure in Your Old Age.

NOW while Enrollment is still open, send for FREE information.

THE 5 DIVISIONS OF

NATIONAL TRADE SCHOOL

Dept. C 2610 Grand, Kansas City 8, Mo.

___• Plumbing ___• Drafting

___• Shoe Repairing ___• Electrical

___• Automotive & Tractor

NAME _____

ADDRESS _____

CITY _____ STATE _____

VETERAN OCCUPATION

Choose One of these 5 Essential Trades

Our complete courses of thorough training prepare you to go right into the field as a Qualified Tradesman at High Pay in only 34 weeks (39 in Shoe Repair). All courses under especially trained instructors with practical experience. 6 Hour Classes 5 Days a Week. Our Employment Department helps you.

VETERANS "Approved for veterans' training by the State Department of Education under Public Law 346." "Approved for veterans' training by the Veterans' Administration under Law 16."

Send Coupon for Free Information Now

Let Us Teach *YOU* to Write

Read these experiences: **WAITER SELLS NOVEL:** A Magazine Institute Student, working as a waiter, recently signed a contract for his first novel, with an advance of over $1000—after completing only half the assignments of the course. **HOUSEWIFE GETS $300 CHECK:** A Virginia housewife, after working a few months, in spare time, with the Magazine Institute, sold her first story to a woman's magazine for $300. (taken from MI files).

The Magazine Institute, a private school owned, operated, and staffed by successful writers and editors, offers an up-to-the-minute course in writing for magazines, which makes it easy for beginners to get started in this rich field. You work in spare time at home. Fiction or non-fiction. Send today for **FREE CATALOG.** No obligation.

VETERANS: Send for special form (this course approved).

The Magazine Institute, Inc., Dept. 469, 50 Rockefeller Plaza, Rockefeller Center, New York 20, N. Y.

LEARN MEAT CUTTING

EASILY - QUICKLY At Home-In Spare Time

The steady, dependable trade of Meat Cutting taught easily, quickly by improved HOME METHOD. National School, established over 25 years, has organized its famous "Learn By Doing" Classroom, Cutting room and Retail Market training system into sound, practical HOME STUDY form.

Now, by the miracle of this EXTENSION TRAINING you can prepare in Your Spare Time At Home, for a better job, bigger responsibilities or success and security in a store of your own. Remember, PEOPLE MUST EAT!

Buying, cutting, percentage, pricing, advertising, selling—a complete meat education. For beginner or men with experience. Thousands of successful graduates. Send coupon for FREE Bulletin NOW!

MAIL THIS COUPON TODAY FOR FREE BULLETIN

National School of Meat Cutting Div. 070, Toledo 4, Ohio

Send me your FREE Bulletin on Meat Cutting and Meat Merchandising. No obligation. No Salesman will call.

Name.....

Street.....

City.....State.....

How To Develop AMAZING PSYCHIC POWERS!

Some of the Thrilling Chapters

Dreams, Visions — Their importance & hidden meaning.
Fear and Worry—How to banish.
Crystal Gazing, Automatic Writing, Ouija Board, Planchette. How to do it.
Telepathy—How to read other people's minds & gain by it.
Clairvoyance—How to develop this Power.
Medium—How to train yourself to be a Successful Spiritualist Medium.
Haunted Houses—How to prove, cure.
Personal Magnetism—How to develop it.
Hypnotism—How to Hypnotise, and how to prevent others from Hypnotising you; also how to protect yourself from evil influences.
This Big Book also tells about Prophecy, Fortune-Telling, Occult Magic, Witchcraft, Evil Eye, Reincarnation, Spiritualism, Spiritual Healing, Psychometry, Human Aura, Trances, Self-projection, Seances. How it feels to "pass over" at Death, and what happens. How to converse with dead loved ones, and 1001 other Secrets of Occult Power!

MONEY • LOVE • SUCCESS

At different times haven't you had strange feelings that certain things would happen, and afterwards they came true? Haven't you had peculiar "hunches" that afterwards proved right? You need not believe in the supernatural to agree that there are Forces and Powers about us that are little understood or used. Yet many have successfully made themselves Masters of these secret Occult Powers. Prof. Hereward Carrington, Ph.D., Scientist, Psychic Adept and Mystic of international reputation, points out in his remarkable big Book—"YOUR PSYCHIC POWERS AND HOW TO DEVELOP THEM," how you can acquire a knowledge of these same Powers and use them in your everyday life. What do you want?—Money? Love? Power? Success? Health? Peace? Happiness? Yours to get if you understand and follow! Get YOUR MIND in harmony with the source of Infinite Power—and Succeed! 358 LARGE PAGES. 41 CHAPTERS of startling revelations. — fascinating, important reading! A most Complete and Authoritative Book of its kind, based on years of research and experimentation. Practical advice is given as well as correct training for Psychical development. Only $1.98 Postpaid for this big, hard-covered, amazing Book; or $1.98 and 20c extra if C.O.D. Order NOW! Satisfaction GUARANTEED or Money Returned.

Copyright 1950-A. Co.

ASTROL CO., Library 80
Main P. O. Box 72, Brooklyn, N. Y.

GROVER AIR HORNS

NOW, a powerful, more compact... easily installed high pressure air horn and air tank assembly that fits on firewall or side splash pan under car hood! **GET FACTS NOW!** Spun brass bells, true-tone harmony, heard for miles! Complete assembly features two matched GROVER air horns, self-filling air pressure reserve tank, bronze diaphragms, brass valve, control handle and all necessary copper tubing, rubber hose and fittings. Instructions furnished. Satisfaction guaranteed. If your dealer cannot supply you, write for facts NOW with make, model and year of your car to

DEALERS JOBBERS INQUIRIES INVITED

GROVER PRODUCTS CO., 1279 So. Hope St., Los Angeles 15, Calif.

Assemble this Electric or gas MOTOR SCOOTER AS LOW AS $29.95

Speed 20-45 MPH. 2 speed transmission. Spring frame for easy riding. Large 12" tires—ULTRA STREAMLINED! Gas Model has 2 H.P. engine. 1 H.P. Electric Model—Battery powered.

Send Only $1.00 (cash, ck. or money order) for complete photos, picture blueprints, construction (C.O.D. $1.52) details, lists of factory made parts, prices, etc., as well as DETAILED INFORMATION ON 125 OTHER PRODUCTS—same as follows:

Pocket Radio "Walkie Talkies"
Car & Home Air Conditioners
2 H.P. Garden Tractors
6 H.P. "Midget" Car, Motorcycles
Electric & Gas Bike Motors

MOTOR INDUSTRIES CO., Dept. PS-9, KEARNEY, NEBRASKA

If Ruptured Try This Out

Modern Protection Provides Great Comfort and Holding Security

Without Torturous Truss Wearing

An "eye-opening" revelation in sensible and comfortable reducible rupture protection may be yours for the asking, without cost or obligation. Simply send name and address to William S. Rice, Inc., Dept. 37-C, Adams, N. Y., and full details of the new and different Rice Method will be sent you Free. Without hard flesh-gouging pads or tormenting pressure, here's a Support that has brought joy and comfort to thousands—by releasing them from Trusses with springs and straps, that bind and cut. Designed to securely hold a rupture up and in where it belongs and yet give freedom of body and genuine comfort. For full information—write today!

Say You Saw It In Popular Science

PISTON TYPE AIR COMPRESSOR

Piston type, size 2 x 1¾, head in valves, bronze bearings, splash lubrication, "V" Belt drive. Intake muffler and cleaner. Capacity 2.8 c.f.m. at 100 lbs. continuous pressure or 150 lbs. intermittent, with ½ HP motor. Can be used with ¼ HP or ⅓ HP at lower speed. Weight 14 lbs. Operating instructions furnished.

Immediate delivery. Price only $17.95

¼" REDUCING VALVE & GAUGE

Oil resistant, pressure 0-to-200 lb. Reduced pressure 0-to-75 lb.; 3 outlets ¼". Wt. 2 lbs. **$5.75**

POP TYPE VALVES

Has a close range of closing after pop-off pressure is reached. ¼" pipe thread. Only..... **$1.50**

CHECK VALVES

Prevent leakage after compressor stops.
¼"..... **$2.50**
⅜"..... **$4.25**

Only $8.95

AUTOMATIC PRESSURE SWITCH WITH UNLOADER

125-150 lb. pressure. Uses ¾ to 5 H.P. unit. **$8.95**

PRICES ARE F.O.B. CHICAGO. Immediate delivery. SOLD ON MONEY BACK GUARANTEE. Send check or money order today. Write for free folder.

C & M EQUIPMENT COMPANY
1831 S. State St., Dept. B-9
Chicago 16, Ill.

GLOWS in the DARK

FREE Sample!

5

Be the first to sell luminous house numbers, light switch plates, wall protectors, pull cords. Also luminous pictures, statues, decals, and a host of religious, nursery and other objects that glow in the dark. Get into this *new* and *growing* industry. Enormous demand... no competition... sensational demonstration... big profits. Represent a large manufacturer, established over 34 years. Write today for liberal money-making offer and free sample to show how they *glow in the dark*.

MADISON MILLS, 303 Fourth Ave.
Dept. J-5 NEW YORK 10, N. Y.

GET INTO

DRAFTING

The Draftsman Plays a most Important Part in INDUSTRY

DRAWING OUTFIT INCLUDED
with Drafting courses.

All the tools you need including folding drawing table. With them you can put your ideas on paper quickly and with accuracy. With training you are all set to master Drafting in months, —not years—at home.

Learn in Spare Time—At Home!
(or at the College in Chicago)

A few hours of pleasant home study every week—that's all. With Chicago Tech's help, you train yourself step by step. This tested method—developed over 44 years of C.T.C. progress —prepares men for good positions in industry.

Practically everything that's built or manufactured these days is constructed from blue print drawings prepared by the draftsman. He is the KEY man in industry. No new machines can be built, no bridges erected, no buildings constructed until the draftsman has completed his work.

Drafting is clean, interesting, professional-type work. The draftsman is paid well to start. And he has real opportunities for advancement to high-pay jobs in Engineering. The tremendous production programs ahead in industry will require more draftsmen than ever before.

Send today for free information. See what this training has done for others, what it can do for you. Simply MAIL COUPON TODAY in an envelope or use a penny postcard.

CHICAGO TECHNICAL COLLEGE
M-225 Tech Building, 2000 So. Michigan Ave.
Chicago 16, Illinois

MAIL COUPON NOW

CHICAGO TECHNICAL COLLEGE
M-225 Tech Bldg., 2000 So. Michigan Ave., Chicago 16, Ill.
Mail me FREE Drafting Lesson with information about big opportunities in DRAFTING and how I can train at home.

☐ Architectural Drafting ☐ Electrical Drafting
☐ Machine Drafting ☐ Structural Drafting
☐ Builders' Course

Name.....Age.....
Address.....
City.....Zone...State.....

FREE Sample Of New PLASTIC Shows How To Make Leather and Leatherette LIKE NEW!

MAGICALLY CHANGES CLOTH TO IMITATION LEATHER

SAVE MONEY - TIME AND EFFORT by renewing Luggage—Leather Covered Furniture—Golf Bags—Auto Seat Covers—Restaurant Furniture, Booths or any Leather or Leatherette item with new plastic discovery called Leather-New. Coat cloth or cloth covered items such as Glider Cushions, Tarpaulins, Porch Furniture, Etc. and make them look and wear like they were leather. Spreads easily with brush or spray gun—leaves NO BRUSH MARKS. Simple Acids, Caustics and Alcohols do not stain this finish—It is sun and mildew proof. Stays Fresh and Clean as long as real leather. Comes in all standard colors. Just mail coupon for Free sample of Leather-New coated material which shows effects.

OWN A PROFITABLE LIFETIME BUSINESS

Cash in on big profits to be made in this new business—Profits up to $700.00 monthly possible, renewing booths and furniture for bars, restaurants, grills, movie houses, etc. Mail name and address on 1c postcard—I'll show you how. **Jack Edwards, Sales Mgr.**

LEATHER-NEW PRODUCTS, 4723 Troost, Dept. S-5, Kansas City, Mo.

JUST MAIL COUPON
No Obligation

Leather-New Products,
4723 Troost, Dept. S-5, Kansas City, Mo.

Name.....
Address.....
City.....State.....
Fill Out—Mail Today

Sensational New Electric ① WELDER ② CUTTER!

BOTH only $12
LOWEST PRICE IN HISTORY!

Uses 110-115 AC or DC • INSTRUCTIONS INCLUDED
WELD - BRAZE - CUT - MELT - SOLDER - HEAT TREAT

The WELDRITE combination—tested and proven by countless commercial and amateur users, is now offered direct to you at the amazingly low price of only $12.00. No Gas—No Gauges—No Spark Lighter needed. Always ready for immediate use—Just plug WELDRITE into 110-115 AC or DC outlet. Uses standard welding and brazing materials available at all welding supply stores. WELDRITE furnished complete with Converter Unit #1 Single Holder with attached Alligator clip, for welding metal up to 3/16" thickness, using up to 3/32" rod, and #2 Double Holder with Copper Coated Dual Carbon Electrodes for Cutting, Brazing, Heat Treating, Soldering, etc, Starting welding materials and instructions included.

Ideal for home workshop. Invaluable for body and fender shops, garages, repair and machine shops, manufacturers, etc.

SEND NO MONEY! 10 DAY TRIAL OFFER Order your WELDRITE Electric WELDER-CUTTER C.O.D. today. Pay postman $12 plus postage charges (wt. 4 lbs.) or send $12 and we pay postage. Either way, if not satisfied, return WELDRITE in 10 days, and money will be refunded. WELDER HOOD—Approved lens found in hoods costing to $10—only $3.95. California orders please add 2½% sales tax.

CALIFORNIA TECHNICAL PRODUCTS CO.
448 So. Hill St., Los Angeles 13, Calif., Dept. B-9

THE GREATEST THING IN PLASTICS!

PLASTICAST

A NEW HOME INDUSTRY AND HOBBY!

PLASTICAST is a transparent liquid plastic; can be poured into ANY kind of mold or container. Hardens in a few minutes into a transparent solid, clear-as-glass, tough as steel plastic! No tools, machinery or skill required. IDEAL for imbedding pretty flowers, butterflies, photos, medals, souvenirs, biological specimens, etc. Makes a **PERMANENT** and **ATTRACTIVE** display. Make attractive jewelry, gems, lenses, knick-knacks, novelties. Easily cast into sheets, rods, blocks, ANY color, ANY shape! **EVERYTHING** furnished, including molds, for making about $50.00 worth of *unusual* novelties! **PLASTICAST OUTFIT, Complete with 3 molds** **$3.50**

PLASTIDUR . . . (LIQUID IVORY). Ideal for casting all OPAQUE articles. Hardens in a few minutes into an extremely hard **IVORY**-like plastic! May be dyed any color or cast into any shape. Works in **EVERY** type of mold! Non-inflammable, waterproof. DURable. Ideal for statuary, novelties, figurines, toys, gadgets, tools, knobs, bases . . . *a million useful applications!* Outfit comes complete with molds, dyes, accessories, instructions, etc. for making about $100.00 worth of attractive jewelry, etc! **PLASTIDUR OUTFIT, Complete with 3 molds** **$5.00**

Our Casting Plastics are as easy to use as pouring water out of a glass!

TERMS: We pay the postage (U.S.A. & Canada only) if full cash accompanies your order. C.O.D. accepted (U.S.A. only) if $1.00 deposit is included for each item ordered. C.O.D. orders not postpaid.

FREE A very attractive and useful novelty made with one of our plastics given absolutely free with every one of our catalogs! Catalog lists many new materials for making **MOLDS** and **CASTINGS** with Liquid Plastics, Liquid Marble, Latex, Elastex, Castwood, Wax, Metals, Plaster, Shellcraft, Internal Carving, Molds, Moulage, etc. Price of catalog only 10c.

DEALERS: WRITE FOR ATTRACTIVE WHOLESALE PRICE LISTS

PLASTICAST CO. (Dept. A)

5961 Madison St. Chicago 44, Illinois — *(Order by mail only)* — P. O. Box 997 Palo Alto, Calif.

GET INTO CARTOONING!

Let **Hartman** teach you cartooning, gag writing at home. Learn by mail from a professional! Send Name, Address for **FREE DETAILS.**

Hartman Studios, 2776 California Court, Lincoln 8, Nebr.

CARTWRIGHT'S

Patented

TRU-CUT TIN SNIPS

Easiest cutting tin snip. Handy tool for 1,001 jobs. Lightweight—will cut 18 gauge sheet metal. Very finest for cutting metal accurately to any simple or complex pattern.

Prompt Delivery

$4.25 ea. Postpaid on cash orders

Check These 7 Tru-Cut Features

1. Cuts a perfect circle, right or left. **2.** Cuts square points, both ways, right or left. **3.** Hands are always above material when cutting. **4.** TRU-CUT Snips are patented and protected by J. Cartwright & Son, in business since 1885. **5.** Tool is guaranteed against mechanical defects and will be replaced upon returning to factory. **6.** Special "Cup Tension Washer" designed and made for TRU-CUT retains a tight fit. **7.** Faster cutting, Truer cutting, Easier cutting, Less tiring, Stay Sharp Longer and will give Years of Service. Get this easy time-saving snip today. If dealer can't supply order direct from us. Send cash, check or money order, and we pay postage. SATISFACTION GUARANTEED. $1.00 deposit on C.O.D.'s.



1. TRU-CUT fits the hand. Well balanced. Weighs only 2 lbs.
2. TRU-CUT will cut inside circle without wrinkling metal.
3. TRU-CUT cuts square points both ways on inside cuts.

Write for FREE CATALOG of complete line of pruning shears and hedge shears

J. CARTWRIGHT & SON

Dept. PS-9

Malaga California

HY-SCORE

World's Most Powerful AIR PISTOL

ACCURATE! FAST! HARD-HITTING! . . . Expensively made piston-type pistol for use by experts. No pumping. 30½ oz. 10¼" long. Cal .177 or .22. $19.85 for set including Hy-Score Pellets and darts. Extra ammunition per box of 500 rounds $1.49 for Cal .177. $1.88 for Cal .22.

Use HY-SCORE Pellets for best air pistol shooting.

If your dealer cannot supply, write for free booklet, Dept. PS-9

HY-SCORE ARMS CORP., BROOKLYN 1, N. Y.

ENORMOUS PROFITS CASTING AT HOME

Write today for NEW FREE CATALOG

Learn to cast thousands of perfect figurines, plaques, book ends, ash trays, etc. Start **NOW—NO EXPERIENCE, LITTLE CAPITAL** needed. Earn **GREAT PROFITS** with **X.L. RUBBER MOLDS.** X.L. Rubber. Pts. **$2.00;** Qts. **$3.50;** Gallons **$8.95;** Models and enough rubber for 3 molds . . . **$1.00—Foreign $1.50.**

PLASTIC ARTS STUDIO — Route 2, Dept. 3 MUNCIE, IND.

Learn ORNAMENTAL HORTICULTURE

A thorough, constructive home training for employment or advancement in Nursery Operations, Park Supervision or maintenance, Landscape Designing or Landscape Gardening. My 3 way Plan shows you how to start your own business, get a better job, or earn extra money in spare time. Send for Free Book. APPROVED FOR VETERANS.

NATIONAL LANDSCAPE INSTITUTE

Dept. PS-9, 310 So. Robertson • Los Angeles 36, Calif.

USED BUT REBUILT IN CLEAN, GOOD CONDITION!

ARMY SHOES $2.59 A PAIR

Now you can wear these sturdy, all weather Army Shoes. Will last and stand up under the toughest wear. Fits comfortably, thick soled, strong leather, Russet tan color only. All sizes. Valued about $5 a pair. Now only $2.59 a pair. Also higher top Combat Boots only $3.75. Special: Both Army Shoes and Combat Boots $5.98. Send shoe size and width, name and address. SEND NO MONEY! Pay postman on delivery price plus postage. Money back Guaranteed. Order Now! Also send for our free catalog of shoes, hats, suits, army clothes, etc.

EUNICE MAIL ORDER HOUSE

Station B, P.O. Box 101, Dept. PS-N, N. Y. C.

Out of Pawn!

GENUINE DIAMONDS

Direct to You—Save up to 50% and more on fine quality, Genuine Diamonds, reset in beautiful modern mountings, styled for Ladies and Men—Sold with an Iron-Clad Money-Back Guarantee. Over 100,000 satisfied customers. Order now from this ad. Write us for FREE ILLUSTRATED CATALOG of other Unredeemed Diamond Pledges from $5.00 to $5000. Send today. Reference: Any Bank or any Mercantile Agency.

1/5 CARAT $125 Value **$49** Tax incl.

1/2 CARAT $200 Value **$95** Tax incl.

BERMAN'S COLLATERAL LOAN BANK

Dept. PS-11, 636-38 W. Balto. St. Baltimore 1, Md.

Sharpen Lawnmowers MAKE $5.00 PER HOUR

You need no experience to operate the Ideal Lawnmower Sharpener. It is simple to adjust, simple to operate. Sharpens blades easily, speedily, accurately. Ideal sturdy, strong construction is the result of 45 years of engineering design. WRITE TODAY FOR FREE BOOK.

The FATE-ROOT-HEATH CO.

DEPT. D-4, PLYMOUTH, OHIO

---

110 V. AC Motor. Approx. 1750 RPM, shaded pole. Fract. H.P. Quiet operating for Record Players, Blowers, etc. 3/16" shaft. Overall: 2¼"x2¾"x1½". Shpg. wt. 2 lbs. **Only** $1.29

T-30 Throat Microphone (AAF). Two rubber set buttons exclude outside noise, leave hands free. Complete with neckband, rubber cord & PL-291 plug. **Special 39c** Shpg. wt. 1 lb. **12 for $2.98**

Extension Cord & Switch for T-30 Mike. 8½ ft. rubber with JK-48 jack & PL-68 plug. Shpg. wt. 1 lb. **Only 49c**

Universal Joint, aluminum. ½" holes. 8" long.....49c

Loop Antennas. High gain, Spider wound. 5" round or 4"x8" oval.....35c ea. **3 for $1.00**

Alnico Magnets—New Experimental Kit of 10 asstd. powerful Bar, "U," Circular, Block, etc. types. Kit of 10 only $1.98

Write for latest illustrated "Alnico Magnet Supplement. Shpg. wt. 2 lbs.

2 Gang Variable Condensers. Standard b'cast, 365 mmf per sect. Ball bearing ⅜" shaft. Shpg. wt. 2 lbs. With trimmers.....75c

Get on our mailing list—always something new. Min. order $1.00—20% deposit on all COD's. Please add sufficient postage.

LEOTONE RADIO CO., 67 DEY ST., N. Y. 7, N. Y.

BUILD YOUR OWN ZEOLITE

WATER SOFTENER

You can do it inexpensively with only a wrench and a little spare time. Famous Zeolite process as used by leading manufacturers. Send $1 for easy-to-follow directions and list of materials. (Materials available locally or from us.) *Or inquire about factory-built LARCO Softeners $55.20 up.* **LAKE REGION MFG. CO., INC., 3920-B Lyna Ave., Minneapolis 16, Minn.**

SUIT YOURS AS A BONUS

And Big Money in Spare Time, Too

We want you to wear this fine made-to-measure suit! Make it yours by sending a few orders, and earn BIG CASH PROFITS in spare time. Your suit will help you get more orders with scores of rich, quality fabrics, tailored-to-measure to newest styles. Also Ladies' Tailored Suits—complete line. Write today for FREE SAMPLES. No experience, no money needed. For quick action tell us about yourself.

J. C. FIELD & SON, Inc.
Harrison and Throop Sts., Dept. J-1721, Chicago 7, Ill.

EARN MONEY IN ANY CROWD

MIND READING

Tell unspoken questions. Call names of strangers.

Tell anyone where and when they were born, their address, telephone number, and dozens of other things. Complete instructions in professional mind reading course. Only $1, complete. Order now!
STANDARD PUBLISHING CO. Dept. MR-4120
930 F Street, N.W., Washington 4, D. C.

Brand New! AIR CORPS B-7 **GOGGLES**

GOV'T SURPLUS

The perfect goggle for outdoor sports — motorcycling, bicycling, hunters, factory, farm and industrial workers. ADJUSTABLE METAL FRAME, optically ground and polished PRECISION CLEAR GLASS LENS, chamois lined rubber cushion, elastic headband. Verified cost to Gov't $10.74. Send only $1.89. We pay postage. Add postage on C.O.D. orders. Your money back if not satisfied!

$1.89

PAUL VARKELL CO.
37 West 39th St. New York 18 · LO 4-7914

New Easy Way TO MAKE

BIG MONEY!

AT HOME

FULL OR SPARE TIME

Permanently METALLIZED BABY SHOES

Costs You Only 5¢-You Get $5.00

Now is the time to cash in on this big-paying, easy-to-operate year 'round business, and *you need no experience!* With actual illustrations and step by step instructions, YOU can start earning money in only *one week*—up to $1000 per month full time, or $50 to $75 per week spare time . . . at $5.00 per hour. Working only a few hours you can make more money than most people make working the entire week.

LARGEST NUMBER OF SUCCESSFUL BUSINESSMEN

Our course has the largest number of successful businessmen in this field today! They are all men and women who acted and are making money. This course is guaranteed—your money will be fully refunded if you are not more than satisfied. There is nothing to lose, so act at once.

- Money Back Guarantee
- Most Successful Name in Metallizing
- Big Income
- Huge Demand
- Sales Plans
- Future Security
- Your Own Boss

IMMEDIATE RESULTS

This tested and *proven* method shows you complete details, so that you may start at once, metallizing Baby Shoes, with real GOLD, SILVER or BRONZE. They will last *forever*, retaining every priceless detail of the natural shoes, something for which there are 8 million new customers waiting to buy every year.

BEGIN AT HOME

Don't pass up this real opportunity to start your own business on a dignified basis at home. DO NOW! We will send you all the details, absolutely free.

FREE!

Two actual metallized Baby Shoes guaranteed to be the most attractive on the market—or a pair of your own Baby Shoes metallized at the factory.

SEND NO MONEY

USE THIS COUPON

KIKTAVI Company Dept. 8-3
2111 W. Manchester
Los Angeles 44, California

Rush me FREE full particulars at once.

Name _____
Address _____
City _____ State _____

IN A FEW SHORT WEEKS
YOU CAN BE READY
FOR A GOOD PAY JOB in

DRAFTING

I SEND YOU A PROFESSIONAL SET OF DRAFTING INSTRUMENTS TO MAKE TRAINING EASY

● It's easy to learn drafting when you have these superior tools to work with. My practical, down-to-earth method of teaching will prepare you for a secure, good income drafting job in a few short weeks. You learn by actually working at the drafting board. Tiresome theory has been cut to the bone. What's more, when you learn by my practical methods, you don't forget. Get the full story at once. Mail the coupon NOW!

Charles H. Zotenko, Director

GET FREE BOOK

CLEVELAND ENGINEERING INSTITUTE
PS-9 2325 Chester Avenue, Cleveland 14, Ohio
Send me a FREE Drafting Lesson and your Success Book, showing opportunities in drafting. No obligation.

Name .....
Address .....
City ..... State .....
Hrs. work ..... ☐ Vet ☐ Non Vet

Learn A Trade NOW!

PRACTICAL SHOP TRAINING!

In Our Chicago Shops

TRADES THAT PAY

LEARN BY DOING

- Auto Mechanics
- Machinist
- Diesel Engines
- Welding, Gas & Arc
- Refrigeration
- Piano Tuning

Above approved for G.I.'s & Civilians

- Body & Fender Repair

ESTABLISHED 1902

VISITORS WELCOME

——CALL IN PERSON OR MAIL THIS AD TO——

GREER SHOP TRAINING

(Dept. PS-398) 460 South State St., Chicago 5, Ill.

Please send without obligation free information regarding trade checked above. (Specify whether you are a Veteran ☐ or Civilian ☐)

Name ..... Age .....
Address .....
City ..... State .....

Famous **BAILEY TECHNICAL SCHOOLS**

OFFER THE FOLLOWING COURSES:

PRACTICAL DIESEL ENGINEERING
REFRIGERATION - AIR CONDITIONING
COMMERCIAL ELECTRICITY
RADIO - TELEVISION MECHANICS

Your future success depends largely on the reputation of the school you attend. Don't take chances! Train at America's foremost school of mechanical specialization. Bailey is *recognized* and *approved* by industry. Bailey graduates get the top pay jobs! G.I. Approved. Send for FREE Catalog.

BAILEY TECHNICAL SCHOOLS
1656 So. Grand Blvd., St. Louis, Mo.

PRECISION JEWELERS SCREW DRIVERS
Complete Set of 8 for Every "Hobbyist"



At last—a complete set of precision screw drivers to meet the needs of every model builder. Not a miniature but the same type set used by U. S. Navy for precision instruments and watches during the war. Brass knurled handles, hexagon heads, finest tempered steel blades. Sizes 2-9. Never before a set of this quality and precision at such a low price. Your money back if not satisfied. C.O.D. $2.00 plus postage or send $2.60 and we pay postage.

PINE WATCH CO., Rm. 48, 29 Eldridge St., New York 2, N. Y.

"Makes Arithmetic Interesting"

ABACUS. Now improved and easy to use. An interesting way to learn arithmetic. A fast way to add, subtract, multiply, divide, and extract square roots. Specially illustrated instructions show how. New model $3.50. Send for free lesson and details.

LOY'S CHINESE CALCULATOR,
Dept. 848, 1317 R. I. Ave., N. E., Washington 18, D. C.

SHINE WITHOUT 'POLISH'

New Invention! • Sells Like Wild

Replaces messy pastes, liquids. Simply glide over shoes—and PRESTO! —you have a lustrous, long-lasting shine. No mess. No muss. No soiled hands. Clean. Handy. WORKS LIKE MAGIC! For Men's, Women's and Children's Shoes. Low priced. Lightning seller!

SAMPLES FOR AGENTS Sample offer sent immediately to all who send name at once. A penny postal will do. SEND NO MONEY—just your name. KRISTEE CO., 705 Bar Street, AKRON, OHIO

Ready to work for you!

THE OPEN SECRET OF LIFE MASTERY....

Did you know, You do not have to remain as you are? That you can become something better?

Why not wake up and stop being pushed around? Dare to claim good health, the respect of friends, and success in your chosen field. Unleash the sleeping powers and energies equal to life's demands. Our Home-Study Self-Discovery-Development Plan may be the very thing you need right now. Money back if you do not get results satisfactory to you. Write for FREE LECTURE and full details without obligation. TODAY.

School of PERSONAL Psychology
Chartered non-profit correspondence education
10th Floor Washington Bldg. Louisville 2, Ky.

AUDELS Carpenters and Builders Guides

4 vols. $6

Inside Trade Information for Carpenters, Builders, Joiners, Building Mechanics and all Woodworkers. These Guides give you the short-cut instructions that you want—including new methods, ideas, solutions, plans, systems and money saving suggestions. An easy progressive course for the apprentice and student. A practical daily helper and Quick Reference for the master worker. Carpenters everywhere are using these Guides as a Helping Hand to Easier Work, Better Work and Better Pay. To get this assistance for yourself, simply fill in and mail FREE COUPON below.

Inside Trade Information On:

How to use the steel square—How to file and set saws—How to build furniture—How to use a mitre box—How to use the chalk line—How to use rules and scales—How to make joints—Carpenters arithmetic—Solving mensuration problems—Estimating strength of timbers—How to set girders and sills—How to frame houses and roofs—How to estimate costs—How to build houses, barns, garages, bungalows, etc. —How to read and draw plans—Drawing up specifications—How to excavate—How to use settings 12, 13 and 17 on the steel square—How to build hoists and scaffolds—skylights—How to build stairs—How to put on interior trim—How to hang doors—How to lath—lay floors—How to paint.

AUDEL, Publishers, 49 W. 23rd St., New York 10, N. Y.
Mail Audels Carpenters and Builders Guides, 4 vols., on 7 days' free trial. If OK I will remit $1 in 7 days and $1 monthly until $6 is paid. —Otherwise I will return them. No obligation unless I am satisfied.

Name_____

Address_____

Occupation_____

Employed by_____ P.S.M.

PRACTICAL AUTO INFORMATION

Keeps Cars Rolling by Making Repairs and Adjustments Easy!



AUDELS AUTO GUIDE
For Every Mechanic, Driver, Owner and Repair Shop.

Sent on 7 Days Approval
Shows How to Tune Up—Keep Brakes Safe—Batteries Powerful—Tire Mileage Up—Save Gas—Lubricate Correctly.

ANSWERS YOUR QUESTIONS
Contains all you need to know about 1—Construction, 2—Operation, 3—Service, 4—Repair of Modern Motor Cars, Trucks, Buses & Diesel Engines in every detail.

NEW FLUID DRIVE TREATED
Easy to understand—1540 Pages, 1540 Illustrations. Gives definite directions on How to handle service jobs.

ASK TO SEE IT—Get this information for yourself —simply fill in and mail coupon today.

$4 COMPLETE • PAY ONLY $1 A MO.

AUDEL, Publishers, 49 West 23rd St., New York
Mail AUDELS AUTOMOBILE GUIDE ($4) for free examination. If O. K., I will send you $1 in 7 days; then remit $1 monthly until $4 is paid. Otherwise, I will return book promptly.

Name_____

Address_____

Occupation_____

Employed By_____ P.S.M.

22 Big Money-Makers in a Single Line!

Amazing New Fluorescent Lights with *CIRCULAR TUBES*

THE HOMELITER

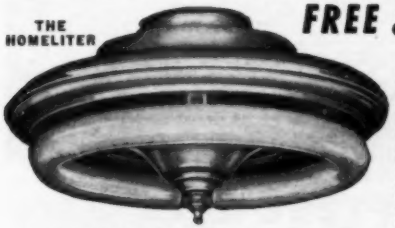

FREE SALES OUTFIT

• Don't send a penny. Sample Outfit is FREE. Rush name on penny post card for money-making facts about sensational new "CIRCLINE" Fluorescents. Latest scientific development gives you 22 new type circular tube fixtures for kitchens, dinettes, halls, and play rooms. Also Floor and Table lamp for living rooms and pin-ups for shaving and vanity tables. Sells on sight to homes, restaurants, stores, offices. No other fluorescents like CIRCLINE. Salesmen who order samples quickly reorder in large quantities. **All fixtures complete with tubes.** No waiting. Also **immediate delivery** on all standard type Fluorescent Fixtures. This is too good to miss. Big, quick profits waiting. Rush name on post card today for FREE Sales Outfit.

NEW MAXILUME PIN-UP MIRROR LIGHT

MAXILUME COMPANY • 125 W. Hubbard • Dept. 99 • Chicago 10, Illinois

WANT AS HIGH AS $3,351 A YEAR?

RAILWAY POSTAL CLERKS

City and Rural Carriers—Postoffice Clerks—Inspectors—Accountants—Clerks at Washington —Many other Government Jobs

TRAVEL FOR "UNCLE SAM"

Prepare Now for Many Coming Examinations
Veterans Get Special Preference

FRANKLIN INSTITUTE, Dept. F81, Rochester 4, N. Y.
(Not Government Controlled)

Sirs: Rush to me, without charge, copy of 40-page book, "How to get a U. S. Government Job," list of positions, and full particulars telling how to qualify for them.

*Name*_____

*Address*_____ *Vet?*_____

COLOR MOVIES FOR HOME USE

Mutt & Jeff cartoons in Kodachrome

8mm 50' ..... $ 4.50
200' 17.50

16mm 100' ..... $ 7.00
400' 25.00
400', sound 30.00

16 mm MAGAZINE USERS

SAVE MONEY BY LOADING YOUR OWN MAGAZINE AT HOME

Empty mag..... $ .75
Complete mag..... 1.35
(no processing by us)

50' roll Super X..... $ .45
Complete mag..... 2.00
(free processing by us)

Empty reels, 8 mm 200' new, steel... $ .25

Empty reels, 16 mm 400' new, aluminum..... $ .30

ROLL FILM USERS

120 127 620 **15c** ea.

35 mm cartridges 36 exposures.. **40c** ea.

35mm FILM FOR LEICA KODAK-ARGUS AND OTHER SIMILAR CAMERAS

ANSCO Fine Pan, Ultra Speed and Supreme
KODAK Plus X, Super XX, and Background X
DUPONT Superior No. 2 and Superior No. 3

ONLY $1.40 per 100 ft. roll

Each roll of film contains 18 strips of 36 exp.—properly notched. NEW PLASTIC CARTRIDGES, ONLY 10c ea.

MOVIE FILM

Weston 50 Outdoors
Weston 32 Indoors

8 mm 25 ft. double....$1.10
16 mm 100 ft..... 2.20

The finest film, now available for immediate delivery. Guaranteed satisfaction. Prices include rapid 48 hour processing service. Film is nationally used. Full tone scale.

MINIMUM ORDER $1.00. To save C.O.D. charges remit by cash, check or money order direct to:

EIGHT-SIXTEEN FILMS, Dept. PS-10
630 Ninth Ave., N. Y. 19, N. Y.

Complete Protection With Just a Flick of Your Finger

Here's quick, easy "finger-tip" protection. Shaped like a regular fountain pen, this pistol pen throws a powerful charge of tear gas 15 FEET! Cloud of gas spreads 4 to 6 feet. You can't miss. Just point pen like you point finger and release trigger. Ideal for home, office or car. May be clipped in pocket like pen. Loads like gun. Fires 38 Caliber S. & W. "Special" TEAR GAS cartridge. Will not kill. Renders mad dogs, robbers, etc., helpless. Can not harm user. Effective indoors or out. NOT SOLD TO MINORS or persons residing in state prohibiting sale of firearms. ONLY $7.50. Cartridges 5 for $2.50. Order TODAY!

SEND NO MONEY Just send name and address. Specify Pen, Cartridges or both. On arrival pay cost plus Express Shipping charges. Send cash with order, we pay express charges. Use 10 days. If not delighted return for money back. Order NOW!

DEFENDO PRODUCTS CO. Dept. 452, 215 N. Michigan Ave. Chicago 1, Ill.

WHY PAY MORE?

Tube Given With Every Tire

Everybody Deduct 10%
SEND THIS AD WITH ORDER

Slightly used **HIGH ORIGINAL TREADS.** Buy in CONFIDENCE. Safe! Dependable! Standard Brands. GUARANTEED to give A-1 SERVICE. **Positively Not Re-caps!**

600-16....	$5.60	700-15....	$5.60
650-15....	5.15	700-16....	6.10
650-16....	5.60	750-16....	6.60
900-16....	8.55	900-20...	15.10
650-20....	9.55	1000-20...	15.55
700-20....	12.55	1100-20...	15.55
750-20 (H.D.)	12.55	32x6(8)...	11.20
825-20....	14.10	32x6(10)..	13.20

750-20 MILITARY 8 PLY.... $12.15

½ million tires shipped to satisfied customers. Trial will convince you. Orders Rushed. Send Money Order or Check.

If Your Size is not Listed—WRITE

STANDARD TIRE
834 N. Broad St. Phila. 30, PA.

BUILD YOUR OWN PROFESSIONAL ENLARGER

SAVE UP TO 50% — With complete MINILITE Enlarger Kit, plus simple step by step instructions, diagrams, screwdriver and pliers, assemble your own Professional Enlarger in 2 hours. Get all features of more expensive Enlargers—for 35MM to 2¼"x3¼" Negatives, Precision Machined Aluminum Alloy Castings, Rotating Glassless Dustproof Negative Carrier, Aluminum Spherical Gear and Rack, Tapered Flexible Bellows, Magnification of 1 to 7 times at base, Assembled Enlarger weighs only 7 lbs. Utilize your own Camera Lens or f4.5 or f6.3 lens, which we can supply. Complete Kit (less lens and baseboard), only $27.45 (inc Federal Tax) postage paid. **10 DAY TRIAL** — with Money Back Guarantee. **EASY MONTHLY PAYMENTS.** Save up to 50%

Write today for **Free Illustrated Folder.**

CALIFORNIA TECHNICAL PRODUCTS 448 So. Hill St., Dept. K-9 Los Angeles 13, Calif.

MONEY for MEN ALL DATA **FREE**

THE PLASTEX Industry needs manufacturers on small scale and for big production of Lamp and Clock Stands, Art Goods and Novelties in Plastex and Marble imitation. Experience unnecessary. ½c material makes regular 10c store sellers. Rubber moulds furnished for speed production. Small investment brings good returns. Big chain store orders now being placed. Ambitious men have chance for real prosperity. Our Free booklet will interest and benefit you.

PLASTEX INDUSTRIES, Dept. 2, 2400 Third Ave., New York 58, N. Y.

RUPTURE SUFFERERS GET RELIEF

Get comfortable, safe relief with scientific support. Soft, sanitary material gives natural support with real comfort to active wearers. Satisfaction guaranteed. For free literature write:

WEB TRUSS CO.
Dept. S-8, Hagerstown, Md.

RESORT OPERATION AND MANAGEMENT

Your Resort Opportunity is today's growing demand for more Outdoor Life and Recreation. Ride this opportunity by establishing your own Resort. Book "tells how" based on years of experience. Covers many problems, management, operation, planning, etc. One hundred pages. $2.00 copy postpaid.

WOODBECK PUBLISHING Co.
WINCHESTER BLDG. GRAND RAPIDS, MICH.

Asked for AHEAD of Graduation by leading aviation companies

PROOF of Opportunity in

Aeronautical Engineering

Stepping directly into responsible aviation positions, members of this recent graduating class at *Northrop* join the ranks of *Northrop* graduates now performing important engineering, maintenance and manufacturing duties in scores of leading aviation firms at home and abroad.

Northrop graduates are in demand. Even many of the more recent graduates are in such important work as design, research, testing, stress analysis, aerodynamics and power plant engineering. Helicopter and guided missile design are examples of advanced projects for which *Northrop* graduates are being chosen.

The training that wins such enviable recognition and rewards for *Northrop* graduates can mean the same advantages for YOU. Get the Institute catalog and complete information on the opportunities open to you through *Northrop* training. SEND THE COUPON NOW.

You're IN Aviation . . . at the Flying Wing School

You train in a technical institute that is part of a leading aircraft company, Northrop Aircraft, Inc.—the company that developed the huge Flying Wings and other famous aircraft. You get the advantages of actual aviation facilities and activities *in advance* of graduation. In 2 years or less you can complete the *Aeronautical Engineering Course*. A new class starts every 8 weeks. The *Aircraft & Engine Mechanics Course* requires only 1 year. A new class starts every 4 weeks.

APPROVED FOR VETERANS

NORTHROP *Aeronautical Institute*

Division of Northrop Aircraft, Inc.

James L. McKinley, Managing Director

1525 East Broadway • Hawthorne • Los Angeles County • California

NORTHROP AERONAUTICAL INSTITUTE
1525 E. Broadway, Hawthorne, Los Angeles County, California

Please send me the Institute catalog and complete information, including starting dates of classes. I am interested in

☐ Aeronautical Engineering Aircraft & Engine Mechanics ☐

Name

Address Age

City Zone State

Check one: ☐ Veteran ☐ In Service ☐ Civilian

LABORATORY TECHNICIAN

BE A LABORATORY SPECIALIST; complete course. Big demand from hospitals, doctors, clinics. We teach all branches of medical laboratory work, including **Medical and Dental X-Ray.**

Approved by American College of Medical Technologists
Co-educational Free Placement Bureau
Free Catalog—Accredited for "veteran" training

CHICAGO COLLEGE OF LABORATORY TECHNIQUE
Dept. P.S. 431 S. Wabash Ave. Chicago 5, Illinois

★ WRIST WATCH
★ STOP WATCH
★ TELEMETER
★ TACHOMETER

Phenomenal Value!

17 JEWEL • 2 PUSH BUTTON CHRONOGRAPH

ONLY **$29.75** PLUS 10% TAX

INCABLOC SHOCK RESISTANT FEATURE
• Sweep Second Hand • Radium Dial • Anti-Magnetic • Unbreakable Crystal. (formerly $71.50)

IDEAL FOR
• Physicians • Engineers
• Radio Men • Sportsmen
• Photographers • Aviators

OUR GUARANTEE
MONEY BACK IN 10 DAYS
If not satisfied for any reason

ADLEW JEWELERS Dept. PS-9
117 W. 42nd St., N. Y. C. 18
Mail Orders Promptly Filled • Shipped C. O. D. or send check or money order.
Address mail-orders to: ADLEW JEWELERS, 152 West 42nd St., N. Y. C. 18. (Dept. PS-9)

Also available in 18-k Gold Case. $64.50 (plus 10% tax), formerly $125.

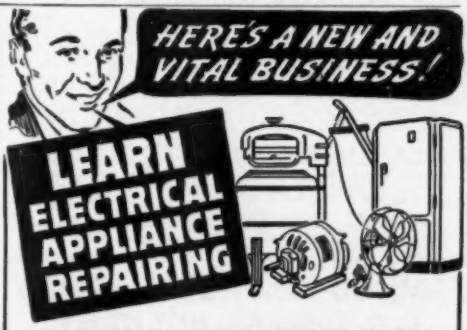

APPLIANCE REPAIRMEN USUALLY CHARGE ON BASIS OF $5.00 TO $6.00 PER HOUR

This fascinating big money making opportunity can be yours if you are mechanically inclined (can hold and use tools). Act. Now!

NO PREVIOUS EXPERIENCE NEEDED!

Think of going to a friend's or your neighbor's home. Picking up and carrying back to your work bench their Sewing Machine, Vacuum Cleaner, Iron, or other appliance. Then using your Christy Course and Christy Electronic Kit to help you locate the trouble and easily repairing the appliance from the clear instructions given. I will help you . . . . . by showing you exactly how much PROFIT to charge for each repair job.

CHRISTY APPLIANCE COURSE & ELECTRONIC KIT . . . . SENT TO YOU!

Rush your name and address by the next mail and I will send to you our special form where you can get our complete course and electronic kit on our simple, easy payment plan. Pay me later with your EARNINGS WHILE LEARNING.

Mr. S. T. Christensen, Pres.

CHRISTY SUPPLY CO.

2835 N. Central Ave., Dept. D-6901, Chicago 34, Ill.

WAR SURPLUS OPTICAL BARGAINS

ASSEMBLE YOUR OWN BINOCULARS!

Save More Than 1/3 Regular Cost

GOVERNMENT'S 7x50 BINOCULARS

Complete Optics!
Complete Metal Parts!
We supply Full Instructions

METAL PARTS—Set includes all Metal Parts—completely finished—for assembly of 7 X 50 Binoculars. No machining required. Bodies have been factory hinged and covered. A sturdy Binocular Carrying Case is optional with each set of Metal Parts.
Stock #842-N **$39.40**
Postpaid, plus $4.80 for Case—**Total** **$44.20**

OPTICS—Set includes all Lenses and Prisms you need for assembling 7 X 50 Binoculars. These are in excellent condition—perfect or near-perfect—and have new low reflection coating.
Stock #8102-N ..... **$25.00 Postpaid**
(These are standard American-made parts)

NOTICE! If you buy both Binocular Optics and Binocular Metal Parts, add 20% Federal Excise Tax to above prices.

ARMY'S 6x30 BINOCULARS

COMPLETE OPTICS & METAL PARTS—Model M-13A1, 6 x 30 Binoculars (waterproof model). Everything you need—ready for assembly. When finished will look like a regular factory job costing $102 to $120. The Optics are new, in perfect or near-perfect condition. Have new low reflection coating. Metal Parts are new and perfect, all completely finished. No machining required. Bodies factory hinged and covered. Complete assembly instructions included.
Stock #830-N ..... **$40.00 Postpaid, plus $8.00 tax—Total—$48.00**

TERRIFIC BARGAIN—BUBBLE SEXTANTS

These Army Air Forces Bubble Sextants cost Govt. about $125 each. Bargain at our price of $12.50. Wooden carrying case included. Wartime used but COMPLETELY REPAIRED AND COLLIMATED. Return within 10 days for full refund if dissatisfied. Directions for use accompany shipment.
Stock #924-N ..... **$12.50 Pos.paid**

Same SEXTANT as above, but BRAND NEW and with Automatic Averaging Device and Illuminated Averaging Disc for nighttime use. Govt. cost $217. Perfect working order guaranteed.
Stock #933-N ..... **$22.50 Postpaid**

6 POWER GALILEAN TELESCOPE—(Commercial Surplus) 28mm dia. Achromatic Objective Lens. Sturdily constructed of Aluminum. 7" long, extends to 9". Complete with carrying case.
Stock #941-N ..... **$3.00 Postpaid**

We have literally millions of war surplus lenses and prisms for sale at bargain prices ranging 10c and up. Write for Catalog "N" — Sent Free!

Order by Stock No. *Satisfaction Guaranteed*

EDMUND SALVAGE COMPANY
P. O. AUDUBON, NEW JERSEY

Learn How to HYPNOTIZE!

Develop your personal POWER!
NOW...revealed for you...are the secrets of **practical hypnotism**...that strange, compelling force by which an expert operator can bring others under his power. He can **sway** people at will—issue commands and be obeyed—virtually cast a **spell** over his subjects. This sensational knowledge may make you a more dominant, masterful personality.

Illustrated* SELF-INSTRUCTION COURSE *in Useful Hypnotism
Amazing lessons in simple, easy-to-understand language. How to select a subject—how to hypnotize by telephone—**how to make money** from hypnotism—mental telepathy—stage hypnotism—self-hypnosis—how to use **modern** hypnotism to conquer inferiority complex, timidity, etc. Clear helpful pictures show operating positions, movements. **Startling low price.** Satisfaction guaranteed or money back.

COMPLETE **ONLY $1.95**

SEND NO MONEY! Simply pay postman $1.95 plus C.O.D. postage—or send $1.95 and we pay postage; same money-back guarantee. Order "Hypnotism Course" today! Nelson-Hall Co., 1139 S. Wabash Avenue, Dept. 2201, Chicago 5, Illinois.

NEW SELF-DRIVE B-M POWER MOWER!

LOW PRICED • FULLY GUARANTEED • Write For FREE Literature

For Modern Lawn Care

End grass-cutting drudgery with B-M's newest model self-drive, three-wheel, rotary blade mower. Equipped with 1½-2 h.p. Clinton Engine. Smooth, positive clutch. Handlebar controls. Light. Sturdy. Puncture-proof rubber tires. Shipped completely assembled. Other models available, including build-it-yourself kit of parts. Prompt shipment. Order direct if not supplied by dealer. **Dealer inquiries invited.**

B-M MOWER CO., Box 66-S, Blue Mound, Kansas

A GREAT SURPLUS BARGAIN

AIR REGULATOR and GAUGE

The buy of a lifetime in a standard make air pressure regulator. Used on liquid carbonic tanks and air pressure tanks of all kinds to regulate the pressure. Fitted with standard ½ inch pipe thread. Dial calibrated 0 to 200 lbs. Reduced pressure 0 to 150 lbs. Made by U. S. Gauge, Air Reduction Co., Walter Kiddie—all famous makers. Used by artists for air brush work, sign painters, retouchers, welders, etc., soda fountains and taverns.

• Fully Guaranteed • All Brand New and in Perfect Condition •

A $15.00 VALUE (Wt. 4 lbs.) **$5.95**

Price F. O. B. Chicago. Immediate delivery. Sold on money back guarantee. Send check or money order today. Write for free folder.

C & M EQUIPMENT CO.
1831 S. State St., Dept. G-9, Chicago 16, Ill.

A MUST FOR MECHANICS

Assembly and repair work made easy with "HOLDIT" screw holding, screw starter. Simply set blade in screw slot and push to get secure attachment; YOU'VE PUT A HANDLE ON THE SCREW. Automatically resets. SATISFACTION GUARANTEED. See your tool dealer or send to factory. Sizes: 3" $1.00, 6" $1.15, 9" $1.25. Send check or money order . . . sorry no COD's. DEALERS WANTED.

"HOLDIT" Box 235, San Lorenzo, California

HOW TO BUILD 78 RADIOS!

Giant book, *Radio For The Millions* tells you how to build 78 radios—an 8-tube FM set, a 2-way radio station, bicycle radio, vest pocket portable, floor lamp set, all-wave receiver, home recorder, etc. 192 pages, 648 pictures! *Order today!* When book arrives, pay postman only $1.49 plus postage for handsome cloth bound, Regular edition. If after 7 days' *free trial* you aren't delighted, return it for full refund. Write for it today, to:—

POPULAR SCIENCE, Dept. 9P, 353 4th Ave., N. Y. 10, N. Y.

MUFFLERS
STEELS and ALUMINUMS with a motorboat tone

SINGLES, Chev., V-8, Plymouth, Steels $5.50, Aluminum $7.00, Chry., Olds., Buicks, etc., Steels $7.50, Aluminum $9.00. V-8 and MERCURY DUALS, Steel $17.50, Aluminum $21.00. Split Manifold Sets, Steels $35.00, Aluminum $45.00. Aluminums are guaranteed for life of your car.

DEALERS WANTED

SANDEE MUFFLER CO.
BOX 296 (LA 71) LOS ANGELES 63, CALIF.
2624 W. SLAUSON AVE. LOS ANGELES, CALIF.

WAR Surplus AND OTHER BARGAINS

ORDER FROM THIS AD PLEASE

Q.M. WOOL SHIRTS 13 TO 15 **2.69**

PANTS 28 TO 34 **2.95**

Perfect condition, designed for reissue. All have been cleaned and pressed by the Q. M. Corps. 100% all wool serge. Priced less than the cheapest work clothes. Add 12c postage per garment.

BRAND NEW KHAKI SHIRTS-PANTS 14 to 17 **2.99** 28 to 42 **3.79**

NEW. Neatly tailored of 8.3 chino khaki suntan material. Shirts have 2 button-down flap pockets, pants have cuffs. Add 10c postage per garment.

GEN. NYLON 50 FT **39¢** PARACHUTE CORD

NEW. Ideal for clotheslines, drapery and venetian blind cords. 550 lbs. tensile strength, 3/16" diameter. Add 7c postage.

50% WOOL HOSE 39¢

NEW. Medium weight, rugged and warm. Pair 3c.

CUSHION SOLES 49¢

NEW. 63% wool, double sole. These are known as the desert sox. Khaki and white. Add 4c postage per pr.

NAVY T-SHIRTS WHITE **69¢**

NEW. Combed yarn full cut. Small, medium, and large. 5c postage.

MAIL ORDERS

Please send remittance with order. Include postage. Guaranteed satisfaction. You are privileged to return an unsatisfactory purchase for refund.

WATCH CAPS 77¢

NEW. Navy watch caps. Color, blue. 100% pure wool knit. Please add 5c postage each.

allwool WRISTLETS 13¢ 8 PAIR 1.00

NEW. 100% O.D. wool knit. Ideal for glove and mitt inserts, wristlet replacements, etc. Worth 75c per pair. Add 3c postage per pair.

13.99

B-15 Style FLIGHT JACKET

NEW. Renders greatest warmth per oz. of weight. Mountain cloth outside, pile lined body and sleeves. Genuine mouton Collar. 4 pockets—2 outside, 2 inside. Wool knit cuffs and waistband. Add 27c postage.

SIZZLING SPECIALS

• ARMY STYLE COMBAT BOOTS

NEW. Rugged, comfortable, 10" High. Reversed uppers, full oak leather sole, with composition outer sole. Add 27c postage. **6.55**

• NAVY STYLE FIELD SHOES

NEW. An excellent work shoe. Reversed uppers, full leather sole, composition outer sole. Add 22c postage. **4.99**

• DOWN & FEATHER SLEEPING BAGS

NEW. Mummy style. Filled with mixture of down and chicken feathers. Water repellent poplin cover. Zipper opening. Add 45c postage. **12.99**

DUST MASKS 33¢

New. $1.50 value. Ideal for millers, farmers, paint and insecticide spraying. Add 6c postage for each.

GREATEST WATCH VALUE in U.S.A.

17 JEWEL Military Style WRIST WATCH

NEW. Genuine incabloc, guaranteed fine quality 17 jewel Swiss movement. Precision case with stainless steel back. WATER RESISTANT, SHOCK PROOF, ANTI-MAGNETIC. Sweep second hand, radium dial, fine leather strap. Save up to $20.00. Please add $2.00 federal tax. Money back guarantee.

19.95 PLUS 10% FED. TAX

WAR Surplus CIRCULAR SEND FOR **FREE** Over 150 War Surplus bargains, also other items.

SIOUX FALLS SURPLUS STORE
113 NO. PHILLIPS · SIOUX FALLS, S. DAK.

NAVY SUN GLASSES 66¢

NEW. $4.00 value. Ground lenses. Approved by the Navy Dept. Complete with case. Add 5c postage.

AVIATORS Style 24K GOLD PLATED RIMS 1.88

NEW. 4-base curve, ophthalmic ground, shuts out 96% of the ULTRA-VIOLET RAY. 24K gold plated rims. Adjustable nose piece. New sensational price.

LEARN MEAT CUTTING

through actual practice. Profitable Meat Cutting and Successful Meat Merchandising taught easily, quickly. LEARN BY DOING at Toledo in just six short weeks under actual market conditions. For beginners or men with experience. All subjects taught thoroughly and completely. Diploma. Job help. Get store of own. People must eat. School in operation nearly 25 years. Approved for GI training. Send today for FREE illustrated catalog. No obligation.

NATIONAL SCHOOL OF MEAT CUTTING, Dept: 51, Toledo 4, Ohio

Treasure and Mineral LOCATORS

Low priced, unsurpassed in efficiency, lightweight models. Miniature batteries and tubes. Credit plan available. Free literature. Dept. PS-84.

FISHER RESEARCH LABORATORY Inc.,
Palo Alto, Calif.

Profit and Fun CARVING LEATHER at home spare time full time

New Device makes it possible for beginners to **improve overnight.** Now is the time to cash in on this Big Paying business — year round profits are easy if you follow **new method** of instruction to be found **only** in Baird's home study course. Big sale for bill folds, wallets, belts, purses, gun holsters, saddles, and other leather articles. Make up to $50.00 per week spare time or up to $500.00 or more monthly full time.

Start your own business. Make Xmas presents and other gifts. The Baird Course is **Complete.** Full instructions — Tools and equipment — including new device that makes learning easy. Write for full details and interesting catalog — containing many profitable suggestions — **Sent Free — Write Now.**

BAIRD SCHOOL OF LEATHER CARVING • 221 Manitou Ave., Manitou Springs, Colorado

How to Write Short Stories, Mysteries, Articles. FREE Book Shows How You Learn at Home for Extra Income or Full-Time Career

The demand for writers is creating great new opportunities for people with an urge to write. It's not as hard to succeed as you may imagine. At home, you too may learn fiction writing, the best basis for all fields—short stories, novels, features, articles, radio scripts—technical, mechanical and business items. Palmer Institute's Home Study Training (Established 1917) is endorsed by Rupert Hughes, Keith Monroe, and other famous authors and by scores of successful graduates. Complete instruction material and professional coaching to develop your own style. FREE book explains how you may enjoy an ideal part time or full time career. Write today (no salesman will call). Veterans: advise us if you are eligible for G.I. Training.

PALMER INSTITUTE OF AUTHORSHIP • Desk U-98 • 1680 N. Sycamore • Hollywood 28, Calif.

Make More Money in

AUTO BODY and FENDER REPAIRS

GET THIS BOOK NOW
In Your Own Home
Send No Money **FREE TRIAL**

GET YOURSELF a share of the big money car owners are spending to keep their older cars looking good. This practical book will put you right into this profitable business. No experience needed. Get a good job or start a business of your own with little or no capital. Biggest selling book of its kind. Thousands in use. Mail coupon today—money back if not fully satisfied.

233 Pictures—Diagrams
325 Pages of Vital Facts

Covers methods, tools, materials—How to get business—How to start your own shop. Latest information and pictures.

Mail Coupon

GOODHEART-WILLCOX CO., Dept. 36
1321 S. Michigan Avenue, Chicago 16, Ill.

Send Auto Body and Fender Repair, $3.50. If not satisfactory I will return in 5 days and you will refund money paid.

( ) Remittance enclosed, sent postpaid.
( ) Send C.O.D. Postage extra.

Name.....
Address.....
City.....State.....

GADGETEERS!!

JOIN THE
FASTEST GROWING CLUB in the WORLD

NEW • DIFFERENT • EXCITING

Gadget-of-the-Month Club, Inc.

TRIAL MEMBERSHIP

YOU'VE read about it in the newspapers—heard it on the radio! Here's **your** chance to join the greatest club in the world!

Created especially for you "gadget lovers," the Gadget-of-the-Month Club sends you each month a new patented practical gadget, **before** it is marketed anywhere! Members get an exclusive preview of tomorrow's gadgets.

6 NEW GADGETS FOR $1.00

More than 600,000 gadget-minded men and women are already enjoying this exclusive privilege. One dollar and this coupon brings you a trial membership; a gadget every month for six months! Get in on the fun NOW. Preview new gadgets before public sale. Send your dollar in today for six-months membership in the most exciting club in America—The Gadget-of-the-Month Club! (This offer is for a limited time only and may be revoked without notice.)

GUARANTEE

The total retail price of the six gadgets you will receive must be far greater than the cost of your membership or **your money will be cheerfully refunded.**

MEMBERS SAY:

"Received my first gadget today and would like to order five more for gifts . . . P.K.M."

"Was thrilled today when I found the postman had delivered my first gadget. My wife insists that I order a membership for her dad, and one dollar is enclosed . . . R. B. H."

"My secretary has swiped the gadget you sent me yesterday to start my membership. Please enroll her so I can enjoy them myself . . . F.O.W."

JOIN NOW!

GADGET-OF-THE-MONTH CLUB, INC.
P. O. Box 2000, Los Angeles 54, California

Name.....
Street.....
City.....
Occupation.....Age.....

LEARN WATCH REPAIRING AT HOME WITH OUR NEW SELF-TRAINING KIT

Get started **NOW** in this uncrowded field! **EASY to learn! BIG MONEY! SECURE FUTURE!** Earn while you learn! **Even as a sideline you can make $50 and up each week!**—Our new **PRACTICAL SELF-TRAINING KIT** is all you need to start. Contains set of **PROFESSIONAL TOOLS: (Loupe, 3-4 power; complete set of 6 special screw drivers—finest tempered steel blades; Tweezer AA; Plastic Material tray)** and **COMPLETE BOOK** on **Modern Watch Repairing.** Fully illustrated, easy to understand, shows every step in repair, adjustment and use of tools. **Now only $6.25** Post Paid (If C.O.D., plus charges.) Money Back Guarantee. If ordered separately: book $3.25; set of tools, $3.50.

MODERN TECHNICAL BOOK & TOOL CO.
Dept. MPS, 55 W. 42nd Street, New York 18, N. Y.

JUST OUT! New All-Inclusive Tool, Material Catalog Revised and Enlarged for Watch-Clockmakers, Jewelers, Tool-Instrument makers, Handicrafters. Over **600 ILLUSTRATIONS** and **IDENTIFICATION CHART. NEW REDUCED PRICES.** All books in these fields; write for literature. **SEND 25c for catalog—FREE with order.**

SENSATIONAL PRIZE CONTEST
$100.00 Cash . . . Many other fine prizes
Tell us in 100 words or less
WHAT PEOPLE SAY about GLUB-GLUB

This contest open to everybody everywhere without restrictions. Just clip this ad to entry. Impartial judges will decide winners. Contest ends Nov. 1, 1948. Glub-Glub, big, handsome, colorful, is the original perpetual motion drink-up bird, mystifying folks everywhere. Get set for fun. Order your own Glub-Glub today . . . amaze and baffle your friends.

Send no money. We ship a factory guaranteed bird—C.O.D. $1.98—you pay delivery charges, or send $2.00 and we will pay postage. Let's go.

House of Plath 9325 E. Forest Ave. Detroit 13, Mich.

WATCH REPAIRING

BE A MASTER WATCHMAKER!

Graduates earn big money—many in business for themselves. The famous Sweazey System of Instruction teaches you quickly and easily. Our 41st year. Write today for free information.

CHICAGO SCHOOL OF WATCHMAKING
Dept. 498, 1608 Milwaukee Ave. Chicago 47, Illinois

BAR BELLS

Buy Direct From Factory
Save 20% to 30%
Write for Free Booklet and Price List

$8.95 up

INDEPENDENT IRON WORKS
2446 EAST 23RD STREET, DEPT. C
LOS ANGELES, CALIFORNIA

Get Ready for Big Opportunities!

I Will Train You at Home Until You Get a **GOOD PAY JOB in DRAFTING**

TOOLS AND EQUIPMENT SENT WHEN YOU START

Get a better job with more pay and pleasant working conditions. Get into Drafting—where all products start. I will train you at home—give you experience—on the same kind of jobs you will do with the best paying firms. I furnish instruments and all equipment when you start. Write today for vital facts and FREE book. Give age.

ENGINEER DOBE • Div. 2D, Libertyville, Ill.

Genuine "CIMIER" IMPORTED SWISS WATCH

5.95

NOTE THESE FEATURES:
- Sweep Second Hand
- Luminous Dial
- Chrome Case
- Stainless Steel Back
- Genuine Leather Band
- Manufacturer Guaranteed for Full year

This Sensational low price includes Federal Tax

Send check or Money Order—We pay postage—or Order C.O.D. and pay Postman only $5.95 plus postage.
If not fully pleased return watch at once and your money will be refunded.

MANUFACTURERS GUARANTEE FOR 1 YEAR
After 1 year your watch will be fully repaired for 50c.
CLEVELAND SURPLUS SALES, 2217 E. 9th, Cleveland 15, Ohio

GENUINE SWISS
2-Push-Button
CHRONOGRAPH WRIST WATCH

ONLY... $9.95

A Sensationally low price for such a precision timepiece . . . A WRIST WATCH and STOP WATCH in one!

IT HAS EVERYTHING!

Note These Features . . .
- It's a TIMEKEEPER!
- It's a STOP WATCH!
- It MEASURES DISTANCE
- It MEASURES SPEED of Airplanes, Cars, Race Horses, etc.

It has Sweep Second Hand, Chrome Case, Precision Workmanship.

EXPANSION BRACELET of matching stainless steel 49c additional.

SEND NO MONEY! Rush order today. Pay postman only $9.95 plus 10% tax and postage. Satisfaction guaranteed or money refunded if returned within 10 days.

SWISS IMPORT CO., Dept. 82
P. O. BOX 5284, CHICAGO, ILLINOIS

LEARN MOVIE PROJECTION
THEATRE MANAGEMENT

The Motion Picture Theatre Business offers big opportunities for trained men. Get into a fascinating field with a promising future. Train at home in spare time. Free Catalog. Established 30 years.

THEATRE INSTITUTE, 385 Washington St., Elmira, New York

RENOVATE YOUR JACKET Your old leather jacket will look brand new when our service department repairs, cleans and restores the leather to its original shade and finish. Send for FREE descriptive circular and itemized price list today!
BERLEW MANUFACTURING CO., INC., Dept. 3, MERRICK, NEW YORK

Poc-Kit Pal Radio

A power packed, super-sensitive one tube beginners kit includes miniature tube, factory wound loop antenna, plastic case and all parts with simple instructions. Works on pen-lite or hearing-aid cells. All parts, tube and batteries protected inside case. Astounding results. Poc-Kit Pal less phones and batteries only $2.98 post paid. SEND $1.00 balance COD plus fee. (FOREIGN $4.00 U. S. Cash).
Lee Electronics Laboratory, Dep't. 1-S, 17 E. 48th St., New York 17, New York

SPEECH DEFECTS

... overcome in the privacy of your own home!

Your money back if our system fails to correct your stuttering, stammering, lisping.

Send for this FREE booklet today ➤

It contains a valuable Analysis Chart and all details.

VOCALON Institute
264 W. 40th St., New York 18, N. Y.

Here's how to prepare for GOOD PAY, a STEADY JOB in AUTO MECHANICS

AUTO MACHINIST
Student in engine rebuilding learning to operate a crankshaft grinder. Specialized training puts you in line for better jobs and higher pay

Earn more money in Auto Mechanics when you choose one type of work and specialize in it. Get ready for a top pay job with security and a real future. New FREE booklet tells how to get specialized training and what to learn to move ahead faster. Get the full facts on opportunities today. See why trained men get the best jobs. Write for your Free copy today.

ENGINE REBUILDING

Up-to-date practical training on latest equipment. You learn machine shop, auto electricity, carburetion, trouble shooting, motor tune-up and transmissions.

GENERAL AUTO MECHANICS

Practical training for general garage work. Engine overhaul, auto electricity and many other subjects. See shops and equipment in our FREE booklet.

VETERANS: American Trade School is G. I. Approved.

WRITE TODAY FOR FREE BOOKLET
AMERICAN TRADE SCHOOL
2413 McGee, Kansas City, Mo.

GENUINE PEMCO WHEELS

6" x 1.50", ½" Bore, Oilite Bearings, $1.35 Each
8" x 1.75", ½" Bore, Ball Bearings, $1.85 Each
HEAVY DUTY with ½" Bore . . . Prices and Data on Request

Finest Quality, Industrial Type Wheels. Ideal for toys, implements, garage and factory equipment. Semi-pneumatic Tire. Load Tested. Send Check or Money Order Today!

PARAMOUNT ENGINEERING & MFG. CO.
1872 RAVINE RD., KALAMAZOO, MICH. DEALERS WANTED!

STOP CHANGING MOTOR OIL!

End this needless waste and expense forever with
RECLAIMO Today's Most Advanced Oil RE-REFINING Filter

Continuously cleans and RE-REFINES motor oil as you drive (by utilizing motor heat)—keeps oil in high grade lubricating quality at all times—reduces motor wear to a minimum! Proves conclusively that "Oil Does Not Wear Out Mechanically" as stated by U. S. Bureau of Standards, (Bulletin 86).

NEW ADDED FEATURE! Gas-Moisture Vapor Injector Increases Mileage with Smoother Performance

"RECLAIMO"
- REMOVES SOLIDS (by filtration)
- REMOVES WATER (by distillation)
- PREVENTS Excess Fuel Dilution
- PREVENTS Acid and Sludge Formation

MAINTAINS Stable Viscosity ELIMINATES All Oil Changes
CAR • TRUCK • TRACTOR OWNERS!

You'll want to know more about Reclaimo's Oil, Motor and Money-Saving Features. FREE 40-PAGE BOOK "OIL FACTS" gives you the complete "Reclaimo" story plus details about our New 90-Day, No Risk-No Cost TRIAL OFFER! WRITE for YOUR COPY TODAY!

RECLAIMO MFG. CO.
5083 ELSTON AVE., Dept. 81, CHICAGO 30, ILL.

SPECIALS FOR September ONLY

TRUCKS

Thousands of Parts For Military

We have for immediate delivery genuine parts for all makes and models, 4x2 - 4x4 - 6x4 and 6x6. All models from ¼ ton to 20 tons. All makes: Autocar, Biederman, Brockway, Chevrolet, Diamond T, Dodge, Federal, Ford, GMC, International, Mack, Oshkosh, Reo, Studebaker, White, Willys, and Jeeps. We have parts lists available on most models. Write stating model of G. I. Truck.



TRAILER AXLE

Heavy duty trailer axle suitable for many types of trailer construction. Also excellent for building of heavy farm trailers and wagons. It is a 15,000 lb. capacity square type straight trailer axle complete with Timken roller bearings, hubs, and 6 hole 750 x 20 Budd Wheels. Without brakes. Axle is 2½ inches square and 70 inches between wheel mounting flanges. Std. width. AN EXCELLENT BUY.

With Single Wheels . . $49.50 With Dual Wheels . . $59.50

DODGE AND PLYMOUTH PISTONS with pins, 3¼" Bore .020 over size. Each **$1.95**

PISTON RING SETS, Dodge and Plymouth. Each **$1.95**

BRAKE LINING SETS. Chevrolet and GMC Trucks 36-48 Rear—4 pieces of lining, manufactured by American Brake Block and Grizzly. Rear Set BLMA No. 654D Each **$2.95**

FRONT SET, (Grizzly only), BLMA No. 644D **$1.95**

JEEP BRAKE LINING SETS. (Grizzly) for 2 wheels, front or rear, BLMA No. 2011 D, per set **$1.25**

JEEP OIL FILTER ELEMENTS PD 51 Purolator **50c**

C31D FRAM OIL FILTER ELEMENT, Military Senior **50c**

JEEP MOTORS

UNITED AUTO PARTS CO. INC
1901 TROOST · GR.1800 · KANSAS CITY, MO.

WAR SURPLUS PHOTO PAPERS

Surplus getting scarce so stock up on tropical overseas packed photographic papers. Outdated but as good as new. Sold strictly on a money back guarantee basis.

4x5 E.K. Aero Cont. S.W. Contrast 1-2 . . . . . 3 gr. **$1.00**

7"x125' E.K. Aero enlarging S.W. semi-gloss Contr 1-3-4 . . roll **$1.25**

9⅝"x200' E.K. Aero enlarging S.W. semi-gloss Contr 1-4 . roll **$1.15**
Contr 2-3 . roll **$1.95**

9⅝"x200' Velour Black enlarging semi-matte Contr 1-4 . roll **$2.25**

Send check, money order or cash. 25% Deposit required on C.O.D. orders. All prices F.O.B. Culver City, Calif.

AIRBORNE SALES CO., INC. DEPT. PSM 9-8 CULVER CITY, CALIF.

ONE YEAR WRITTEN GUARANTEE!

ARMY AIR CORPS 16 JEWEL

ELGIN

$19.95

Made for Pilots and Navigators of the U. S. Army Air Forces. **They had to be good.** Sturdy 16 Jewel Elgin men's wrist watches. Shock resistant. Sweep second hand. Luminous hands and dial. Stainless steel back. Unbreakable crystal. Water repellant. Made by ELGIN one of America's outstanding watch manufacturers. Fully reconditioned. One year **written guarantee** sent with each watch. Supply limited! **SEND NO MONEY.** Simply pay postman $19.95 plus 10% tax and postage on delivery. Cash orders sent postpaid. United Products Co., 7941 S. Halsted, Dept. RES-920, Chicago 20.

PRINT YOUR OWN POST CARDS



COMPLETE OUTFIT *only* $7.50

Amazing results in sales, inquiries and contacts . . . saves time and money . . . very easy to use GEM STENCIL DUPLICATOR is ideal for *Advertising, Announcements, Notices, Labels, Forms, Price Lists*—hundreds of uses for every type of business and organization. Comes complete with all supplies, instructions and 60-page Book of Ideas.

FREE TRIAL OFFER: Try it before you buy it! Write and a GEM OUTFIT will be sent you postpaid After 10 days, send only **$7.50** or return the GEM, no questions asked. The GEM must sell itself; you be the judge.

BOND EQUIPMENT CO. • Dept. 151
513 Olive St. • St. Louis 1, Mo.

SEND NO MONEY • FREE TRIAL OFFER

ALL PURPOSE CLUTCH

$9.95

Collet Type, up to 2 H. P. For industrial uses, for inboard motor boats and Hobby shops. Shipped anywhere in U.S.A. post paid.

MICHIGAN CLUTCH COMPANY
756 Oakdale St. S. E., Grand Rapids 7, Mich.

SAVE ON HOUSE PLANS

ORDER FROM OUR ENLARGED

HOUSE PLAN BOOK

Complete construction blueprints available in Frame or Concrete block construction. Send 50c for Plan Book.

BROWN & TREADWAY
Architect *Civil Engineer*
2412 West Seventh St. Los Angeles 5

MAKE BIG MONEY!

Be a floor surfacing contractor and sand both new and old floors. Sanders are easy to operate and better still, you're your own boss. Write for latest "tell-all" booklet entitled "Opportunities in Floor Surfacing" enclosing 25 cents in coin or stamps to cover handling.

AMERICAN
FLOOR SURFACING MACHINE CO.
532 So. St. Clair Street · Toledo 3, Ohio

DO YOU SUFFER

from

RHEUMATISM?
ARTHRITIS? NEURITIS?
SCIATICA?

Send for **FREE BOOK**

describing the proven, specialized treatment that has been amazingly successful in combatting rheumatism, arthritis and similar painful disorders. This illustrated book "RHEUMATISM" fully explains causes and effects . . . tells you WHY drugs and medicines afford but temporary relief. Delay may be dangerous.

LEARN ABOUT SPECIALIZED TREATMENT

Send for FREE Book today—a postcard will do. No obligation. Write today.

BALL CLINIC Dept. 36, Excelsior Springs, Mo.

Electrify MOTHER'S OR WIFE'S SEWING MACHINE

MAKES SEWING A PLEASURE!

ANYONE CAN INSTALL

COMPLETE WITH SEWING LIGHT $15.95

PORTABLE CASE FOR ANY TYPE MACHINE $12.50 SPECIFY MAKE & NUMBER.

OUTFIT CAN BE USED FOR HOBBY WORK, SHOP, ETC.

Free Catalogue

Include Postage Case 7 lbs. Kit 6 lbs.

PASAAK'S 343 Canal St., Dept. PS New York 13, N. Y.

CONCRETE Construction

New Practical Book Makes All Jobs Easy!



Save Money on Home Repairs and Improvements

Get this brand new book by Siegele, America's authoritative instructor on all construction subjects. Real professional information for all building and construction men and ideal for home repairs and improvements. Covers layouts and all types of form building, concrete materials, mixes and methods, tests, repairs, reinforcings. Can easily be worth many times its cost on one single job. Cloth binding. Fully illustrated. Only $2.50. Order No. 1 on coupon below.

OTHER DRAKE BOOKS THAT MAKE AND SAVE MONEY

ELECTRICITY—HOUSE WIRING. Practical and up-to-date. Fine book for handy home-owner. 200 pages, illus. Book No. 2. $2.00

CARPENTRY. A most practical and usable book that will give you a working knowledge of all building details. Expert's best methods for measuring, cutting, fitting, all materials. 300 pages, 700 illus. Book No. 3. $2.50

PAINTING AND DECORATING. A book for painters and home owners. Covers methods, tools and materials for every branch of painting and decorating. No matter what kind of job you want to do it is in this book. 350 pages, 288 illus. Book No. 4. $2.50

SPRAY PAINTING. New, enlarged edition. Auto painting now included. Complete. Only instruction you need. 160 pages, illus. Book No. 5. $2.00

MAIL COUPON Money Back if Not Satisfied

Frederick J. Drake & Co., Dept. 56
600 W. Van Buren St., Chicago 7, Ill.

1 2 3 4 5
Circle Number

Send me books checked. If not satisfied I will return them in 5 days and money will be refunded.

( ) Check or Money Order enclosed $.....Send books postpaid.
( ) Send C.O.D. plus postage.

Name.....

Address.....

City.....State.....

Drake's Books are Sold by Leading Booksellers

PSYCHO-POWER DYNAMIC MENTAL FORCE

Success—Health—Happiness

OBTAIN YOUR DESIRES

Priceless Secrets of Success, Happiness, Personality, Wealth and Health revealed! Revolutionize your Life! FREE BOOKLET, entitled, "An Amazing Secret", 24 pages, sent to you upon request. No obligation. PATY CO., 618 South Western, DT 153, Los Angeles.

AN AMAZING Secret

Brand New Navy Surplus Precision

ENGINEERS GAGES

● Specially designed for machinists and engineers who want a compact set of gages. Consists of taper gage with 3" rule on reverse side, wire gage with decimal equivalents on reverse side, and 9 thickness gage leaves from .002 to 1/16". Overall length is only 4¾". List Price $5.00. No C.O.D.'s. Send check, money order, or cash. Satisfaction guaranteed.

$2.00 post paid



ATLANTIC TRADING CO. 157 Federal St. Boston 10, Mass.

WILL YOU SPEND 3 MONTHS... to BUILD A *New* BODY?

Will you work three months for a stronger, more handsome physique? If you have that much ambition, PARAMOUNT BAR BELLS are your sure, fast way to physical development. In no time at all you'll actually see your neck, chest, arms, shoulders and thighs growing to new, shapely proportions. Thru the use of Paramount Bar Bells you will be providing these sets of muscles with the right kind of resistance for fast development.

WRITE FOR *Free* **ILLUSTRATED CATALOGUE**

8.95 UP

See PARAMOUNT'S complete catalogue of barbells, dumbbells and home gyms. You can save 20 to 30% on body building equipment. ACT NOW! WRITE TODAY!

FACTORY PRICES

INDEPENDENT IRON WORKS

2416 East 23rd St., Dept. 20, Los Angeles 11, California

Here's Your HIGH SCHOOL EDUCATION

25 Subjects Simplified in One Volume!

Fill in the gaps in your education! Increase your earning power! Mathematics, English, History, Foreign Languages; Chemistry, Physics, other Sciences; Literature, Arts—the whole scope of High School subjects for home study. With Study Guide, Self-Tests. 1,280 pp., 300 illustrations. **Only $3.98.** Money-back guarantee. Order from

NELSON DOUBLEDAY, INC., DEPT. 9 P. S. GARDEN CITY, N. Y.

LEARN AND EARN AT HOME

Learn SCREEN PROCESS, the modern machineless method of printing. Uncrowded, profitable field where trained men are always in demand. 2 BIG KITS OF SUPPLIES we send start many of our students making money even before finishing home study course. Write today for FREE BOOK giving full details. APPROVED FOR VETERANS.

California School Of Screen Process, 3746 Overland Avenue, Dept. S-98, Los Angeles 34

LEARN CHEMISTRY AT HOME

The demand for men trained in chemistry is great. Big pay job opportunities are growing by leaps and bounds. If you want to get into this fast growing, fascinating, high pay field by studying chemistry at home, write today.

INSTITUTE OF PRACTICAL CHEMISTRY
45 PROSPECT AVENUE, HAGERSTOWN, MD.

SENSATIONAL VALUES
IN NEW EQUIPMENT

CRANKSHAFT RE-TURNING TOOL

$19.95

You can re-dress and re-turn crankshaft without removal from engine. Diametric range 1¼ in. to 2½ in. Complete with 25 cutting blades. Blades vary in width according to cut required. Cost U.S. Govt. $65. Complete with metal case. Only **$19.95** F.O.B. Cleveland

***See your light switch in the dark with* LUMINITE**

89c each. Post Paid

79c each in lots of 10 or more

The electrically lighted wall switch. AUTOMATIC—Always on when room is dark. Always off when lights are on. Ends fumbling and stumbling in the dark; helps keep walls free of fingermarks. Operates for less than 2c per year.

HEAVY DUTY UTILITY WHEEL AND TIRE

Tough, heavy duty rubber tire on cast aluminum wheel. Outside diameter, 17"; width 6"; aluminum wheel 5¼" diameter; axle bore ¾". No inner tube necessary. Will support 500 lbs. With inner tube will support 1000 lbs. Just the wheel for garden tractors, wheel barrows, light carrying rolls, trailers, etc. Only ..... **$5.95** F.O.B. Cleveland

HYDRAULIC CYLINDER

Bore 1-7/16 in., stroke 4 in. Aluminum construction, stainless steel interior. Standard ¼ in. pipe thread connections. Ideal for lifting, bending, tilting, pulling, pushing, etc. Can be converted into fluid pump, air compressor or air engine. A real labor saver. Only **$2.95** F.O.B. Cleveland Send check or money order. No C.O.D. Write for quantity prices.

HANDY 4 in 1 BENCH TOOL

PUNCHES—SHEARS—FORMS—RIVETS

Sturdy, compact all-in-one tool. Does 4 different jobs. Shears aluminum, brass, etc., rod up to ½"; forms ½" x ¾" strip; rivets solid ⅛"; hollow ¼"; punches up to ½" hole. Indispensable for home workshops, hobbyists, light production. Complete with bending and forming dies, full set of punches and measuring gauge. All cutting surfaces hardened steel, may be sharpened. Will give long satisfactory service. **$8.95** F.O.B. Cleveland

WAAG ENTERPRISES
3109 Broadview Rd. Cleveland 9, Ohio

Plastic Coasters and Tiles



EMBED REAL FLOWERS in *NEW* Magic PLASTIC

Now create many unusual things like the distinctive pansy coaster shown—made by embedding real pansies in Castolite—the "magic" liquid casting plastic. Comes crystal clear, or may be dyed to produce striking color effects. Make really different jewelry, book ends, picture frames, candle sticks, figurines. Embed real flowers, butterflies, coins, medals, photos, fan plaques, paper weights, tiles, other art objects. Use only home tools. Follow simple step by step method. New pleasure, fine profits are possible. Send 25c for exciting new Home Project Manual showing how to get started. Write today.

MANUAL 25¢

The Castolite Company, Dept. K-4, Box 391, Woodstock, Ill.

EASY-CARVING STONE

BE A SCULPTOR! Have fun. Make money. Beautiful, permanent, imported oriental stone. Various colors. Rivals jade! Use pocket knife, electro tool, drills, files, turn on lathe. ➔ ENDORSED BY PROFESSIONALS!

Kits $1.60 & $2.60 P.P.d. Slightly higher West of Miss. R. $2 & $3 in Canada. No C.O.D.'s please. VARIOUS SIZES AVAILABLE. Thousands satisfied.

FAR EASTERN SCULPSTONE CO., 159 E. 28 ST. Dept. S, New York 16

Get The Right Size . . . at the Right Price!

SAVE ON HI-SPEED DRILLS

25 Re-Conditioned Number and Fractional Drills . . . mixed assortment.
SIZES TO ¼" $2 . . . TO ⅜" $3 . . . TO ½" $5
H. S. TAP ASSORTMENT—all sizes—10 for $3.50
N.C. and N.F. ¼" thru ½"
FREE! Decimal Tap and Drill Chart with orders.
Send check, money order or cash . . . Immediate Delivery.

LAMPKE SURPLUS TOOLS, 11607 Linwood Avenue, Detroit 6, Mich.

New...Self-Contained SPRAY GUN

No Hose! No Tanks! No Pumps! No Motor!

It's true! A high-pressure spray gun as self-contained, as compact and portable, as a flashlight! Uses no current. Pressure comes from inexpensive CO2 cartridge. A cartridge sprays 18 to 20 oz. of liquid (depending on viscosity). Use gun for paints, liquid insecticides, oils, etc. For home, farm, workshop, garden, garage. Comes with 3 cartridges. Fully guaranteed. The Becker Spray Gun is shipped postpaid for only $18.50; or send only $2—we'll ship C.O.D., you pay postman balance plus postage. Extra cartridges, 10 for $1, postpaid.

$18.50 (With 3 cartridges) POSTPAID

SULLIVAN-BECKER CO., Dept. 128-J, Kenosha, Wis.

Sensational Value!

PAINT SPRAYER
WITH ELECTRIC MOTOR

DOES ALL ORDINARY PAINT SPRAY JOBS

Uses Lacquers, Varnishes, Paints, Etc.

Complete Only $19.95

Positively unheard of 'til now—an electric powered sprayer outfit at such a low price. Not a toy! Not a makeshift. It's a real, practical all-purpose sprayer outfit complete with compressor, 110 volt A.C. or D.C. electric motor, suction type, continuous flow spray gun, paint container, 10 ft. air hose, 6 ft. electric cord and plug. Use it for home shop, auto and 'round the house jobs, and do a good job—quick. Rush order today. Only $19.95 complete. Send check or M.O. If C.O.D. send a five dollar bill for deposit.

Weighs Only 8 lbs. Portable. Use it Anywhere

HOME SHOP PRODUCTS CO.
Dept. 2-D 4821 Sheridan Road Chicago 40

CLEAN HANDS

Keep them free from Grime with SKAT

DISTRIBUTORS WANTED

SKAT CO.
Hartford 6 Conn.

MOOR AIR COOLED PIPE

For a dry, even burning, 50% cooler smoke; no breaking-in, no sludge, no bite—

SMOKE THE PIPE WITH 3 AIR VALVES.

Imported Briar—Standard shapes: $5.00

Sold under money-back guarantee.

N. V. MOOR CO., 420 Market St., San Francisco

Send 10c for booklet: "Facts about Briar Pipes"

WAR SURPLUS BARGAINS

110 VOLT, 60 CYCLE, 2500 WATT

POWER PLANTS

GOVERNMENT COST $535.00

Famous Army PE-75 Plants. Briggs 6.5 h.p. engine—driving 110 volt, 2500-watt Leland A-C Generator. Ideal size for farm, ranch, contractors, etc.

Only $266.80 FREIGHT PRID

- New 2500-watt plants with tools & spare parts) $266.80
- Fully recond. plants 2500-watt $229.80
- "As is" 2500-watt plants. Require minor adjustments $180.80
- New 2500-watt plants without driving engine $124.80
- Reconditioned 600-watt 110-volt 60-cycle plants 127.80

Illustrated manual "How to Wire Your Own Home" free with ea. plant.

6 H.P. GAS ENGINES

NEW COST $140.00

BRIGGS-STRATTON, BUSY BEE

World's Finest Gas Engines. Ideal size for garden tractors, pumps, sprayers, saws, etc. The buy of the year! Will not be duplicated.

ONLY $86.90 PREPAID

- Briggs Model ZZ-6.5 h.p. Fully reconditioned ..... $ 86.90
- Briggs Model ZZ-6.5 h.p. Brand new. Original carton 115.50
- Busy Bee, 6.5 h.p. gas engine (a real unit) Brand new 82.90

ROTARY GEAR PUMP

PRECISION BUILT ORIGINAL PRICE $24.00

Precision pump made for B-29s. 4" x 8" size, 1½" shaft. Mechanics say "Most versatile pump made". ● Useful for pumping liquids, vacuum, pressure; capacity to 3 g.p.m. Vacuum 29 in. Pressures to 200 lbs. Full instructions and operating data furnished with pump.

$3.95 POSTPAID

We guarantee customer satisfaction. Reference National Bank of Commerce. Order direct from ad or send for catalog. We accept checks. We pay all freight in USA.

LECO ENGINEERING CO.

Box 908-PS9 Lincoln, Nebr.

Now YOU Too Can Sculpture!

How many sculptors do you know? They're scarce, aren't they? Now, you can sculpture with ease with the only kit of its kind on the market. Never before has a kit been available which will reveal so many hidden talents. Surprise yourself. Amaze your friends. Enjoy the personal satisfaction you will receive by making something that others admire. You will be fascinated by this new relaxing handicraft. No rubber molds. You construct the entire project even to coloring the finished surfaces. Kit contains complete plans on balsa wood for a bird in relief, suitable for mounting on plaque, and for a wall vase, both useful and ornamental; red, yellow and blue paint; brush, cement, surfacing material, X-acto knife; emery board, bird's eye, decals and complete instructions. Plans of other projects available. Suitable for children and adults. Send $2.25 today to

SCULPTO LABS., 528 Forest Ave., Staten Island 10, N. Y.

SHEEPSKIN LEATHER JACKET

Navy J4 Flying Type—Sizes 36-46—Converted

Now you can get a WELL TAILORED, LONGER LASTING, WARM jacket at minimum cost because you are buying direct from the Manufacturer. Special Features: Length 27", Mouton Collar, By-swing Sleeve, Heavy-duty Talon Zipper, Double Lined Leather Cuffs and Wristlets, Extra Leather on Top Sleeve. Buy this jacket now! Money Back Guarantee. $18.95. Prepaid orders shipped postage free. C.O.D. orders—you pay postage.

Renovate Your Jacket—Lengthen the life of your leather jackets at manufacturer's wholesale rates. Send for FREE descriptive circular and price list today.

BERLEW MFG. CO., INC., Dept. S, Merrick, New York

We Find SCARCE BOOKS for YOU

Scarce, out-of-print, unusual books quickly supplied. Prompt service. Reasonable prices. Books sent prepaid. Any subject. No obligation. Send list of books wanted. 30 years in book business.

CLIFTON COMPANY, Box 1377, Dept. PSD, Beverly Hills, Calif.

ADJUSTO SAFETY MIRROR with "REMOTE CONTROL"

A rugged mirror, heavily chrome and cadmium plated; designed especially for trucks by truck operators. Mounts through door or body on either side, and is controlled from within cab. Retracts for extra clearance. Keeps perfect rear-vision at your fingertips! Fits any vehicle!

- 16" mirror rod..$7.50 PP.
- 22" mirror rod..$7.65 PP.
- 28" mirror rod..$7.95 PP.

See your dealer, or order direct; Cash or C.O.D., Immediate delivery.

HUSTAD DISTRIBUTING COMPANY

840 So. 52 St. Dept. 59 Omaha 6, Nebr.

Talk AS FAR AS 17 MILES WITH ARMY FIELD TELEPHONES

Amazingly simple to install and operate. Just hook up terminals of two or more phones to any two-strand wire and you are ready to talk! Powered by standard flashlight batteries. Compact . . . rugged . . . portable.

Hundreds of uses for quick, low-cost, dependable 2-way communication around home, shop, farm, industry. *Performance equals present-day commercial telephones.* Up to six phones can be used efficiently on a single line, making a complete telephone system. No maintenance required. Each phone complete with self-contained hand-operated ringer. *Every phone checked for perfect operation and fully guaranteed.* Originally cost government $39.90 each.

USED—good, serviceable condition	$ 7.45 ea.
USED—excellent condition	8.95 ea.
RECONDITIONED—(by U. S. Signal Corps)	10.75 ea.
LIKE NEW, slightly used	12.95 ea.
BRAND NEW PHONES—canvas case	15.00 ea.
BRAND NEW PHONES—Mfrd by Western Electric, Stromberg Carlson and Kellogg, with canvas case	16.75 ea.
NEW WESTERN ELECTRIC FIELD PHONE HANDSETS pst. pd.	4.75 ea.

We are the original firm to introduce Army Field Telephones on the national market. We deal exclusively in this item, and our experience in handling this equipment has resulted in the satisfaction of thousands of customers and many repeat orders.

ARMY FIELD TELEPHONE WIRE

WIRE—UNUSED W-110-B 2-strand (illustrated) — 500 ft. **$3.50,** 1000 ft. **$6.50.** (mile reels available.)

NOTE: By popular demand, we are now making available this hard-to-get item for the first time:

—SPECIAL—

NEW—½ MILE REEL 2-STRAND LIGHTWEIGHT W-130 ASSAULT FIELD TELEPHONE WIRE. Weighs only 16 pounds, with purchase of phones, per reel **$15.00**

If desired without phones, per reel **16.50**

For complete Telephone Systems using from 7 to 48 telephones, Brand New Switchboards are available from $32.50 to $65.00 complete.

All prices FOB Sacramento. No COD. California residents add 2½% for sales tax.

FIELD TELEPHONES—SWITCHBOARDS —TELEPHONE WIRE and RELATED ITEMS

For complete details...

Write for FREE illustrated folder

Now as Low as $7.45 ea.

SEND CHECK OR MONEY ORDER **LORIS SALES**

P.O. Box 1896-A-9 Sacramento, California

REAL SURPLUS VALUES

EMERGENCY SUPPLY TANK

Fill at any gas station. 150 lbs. air 5 flat tires. Inflates rubber boats. Use for touch-up spray jobs, tire service truck, air horns, dust out motors, machinery, etc. Shatterproof 12"x24" stainless steel tank with carry handle, check valve, two feet hose and tire filling chuck. Only..... $7.95

Tank only 12"x24", tapped each end ¼ pipe thread, 500 lb. pressure. Build your own. Ideal for paint spray, air receivers, net floats, buoys, etc. Each..... $4.75

Small size tank, 6"x24". Only.....$2.98

Portable SPOT-LITE

PISTOL GRIP SPOT AND EMERGENCY LIGHT

For police cars, auto wreck trucks, cars, boats, etc. Red, green, amber and blue snap-on lenses free.

4½ inch spot with 26 volt sealed beam lamp.....$1.95
With 6 volt, sealed beam lamp.....$2.49
6 inch spot with 26 volt lamp.....$2.95
With 6 volt lamp.....$3.95
26 volt replacement bulb.....49c
6 volt sealed beam.....$1.23

A. C. LIGHT PLANTS



LOWEST PRICE EVER OFFERED WE INVITE PRICE COMPARISON

Original Cost Over $400.00 Now Only..... $249.50

2500 Watts 110 AC Volts. Same as R.E.A. or City Current. Nearly new condition. Fully guaranteed. Powered by Briggs-Stratton 6½ hp. Air Cooled Engine. Prices FOB., K. C.

BRIGGS-STRATTON ENGINES

1½ HP MODEL N— GOVT. SURPLUS

In good operating condition with 30 day written guarantee . . . $39.50



Engines will develop almost 2 Hp at 3600 RPM. Hurry, don't wait, buy now while limited supply lasts. Suitable for lawn mowers, garden tractors, motor bicycles and scooters, midget cars, etc. Will power many kinds of machinery.

PRICES FOB. K. C. NO COD'S

MIDWEST SURPLUS SALES CO.
2533-X-INDIANA
KANSAS CITY 1, MO.

SEND FOR FREE CATALOG
HUNDREDS OF VALUES

STOPS LEAKS *PERMANENTLY*

Cut your fixture replacement, water and fuel bills with Economy Renewable Seats. Make economical, permanent repairs quickly and easily with the Junior Kit (Illus.). Repair bathroom, kitchen and laundry fixtures. Everything you need included in steel box. This is a natural for the "Fixit" shops—get extra income from making permanent repairs on your customers' faucets.

Senior Master Kit also available—repairs faucets and valves up to 1" pipe. *At better Jobbers and Hardware Stores . . . or Write Direct.*

ECONOMY VALVE SEAT CO.
3122 N. California Avenue, Chicago 18, Ill.

NOW YOU TOO CAN BUILD 15 RADIOS

COMPLETE KIT $14.75

Absolutely no Knowledge of Radio Necessary
You Need NO Additional Parts

The PROGRESSIVE RADIO KIT is THE ONLY COMPLETE KIT. Contains everything you need. Instruction Book, Metal Chassis, Tubes, Condensers, Resistors and all Radio parts.

The 36-Page Book written by Expert Radio Instructors teaches you to build radios in a Professional Manner. You start with a 1-tube receiver. Before you are done with this kit, you will have built 11 Receivers, 1 Public Address System and 3 Transmitters.

SPECIAL FREE OFFER!

Electrical and Radio Tester sent absolutely FREE with each Progressive Radio Kit. PLUS FREE membership in Progressive Radio Club. Entitles you to free expert advice and consultation service with licensed radio technicians.

Write for further information, or ORDER your KIT NOW! ONLY..... $14.75

Postage prepaid with check or money order.
(Postage not prepaid with C.O.D. orders)

PROGRESSIVE ELECTRONICS CO., Dept. 100
497 Union Avenue Brooklyn 11, N. Y.

MOTOR BARGAIN $2.45



1/30 HP 24 volt DC motor 2450 R.P.M. .95 amps ¼" shaft size overall 2" x 4". Weight 3 lbs.

USE AS 6 VOLT GENERATOR—Generate your own power. Can be operated on your bicycle wheel. Furnishes sufficient power for two 6 volt bulbs. Resistor furnished free with each motor enables you to maintain constant voltage. Special Price **$2.45**, or 4 for **$7.50**. Lots of 24 for **$36.00**.

Prices are F.O.B. Chicago. Immediate delivery. Send check or money order today. Sold on money back guarantee.

C & M EQUIPMENT CO. 1831 S. State St., Dept. B-9 Chicago 16, Ill.

Fistula May Often Result From Piles

FREE BOOK—Gives Facts On Associated Ailments



A new, illustrated 40-page book on Fistula, Rectal Abscess, Piles and other rectal and colon disorders is now FREE to all sufferers. Write today—a card will do. Thornton & Minor Clinic, Suite 949, 926 McGee St., Kansas City, Mo.

Say You Saw It In Popular Science

FREE BOOKLET—For Those Who Suffer From

TOOTH DECAY!

TELLS WHAT YOU CAN DO ABOUT IT

Learn the amazing story of Deaf Smith County, Texas, where tooth decay is practically unknown. The booklet, "The Trail Began in Texas," will be sent you absolutely free. Just write your name and address on a penny postcard and mail to: L. M. & W. Company, Box 309-D, Marshall, Mich.

PRECISION MICROMETERS

WAR SURPLUS
ALL NEW! STANDARD BRANDS
MANUFACTURED TO GOVERNMENT SPECIFICATIONS

No. 901 Reed Micrometer 0" to 1". Black C metal frame with ten thousandths calibrations. Decimal equivalents on the thimble	$4.50
No. 802 Reed Micrometer, as above, 1" to 2"	5.75
No. 806 Reed Micrometer, as above, 5" to 6"	6.75
No. 436 Starrett Micrometer 4" to 5". Black C metal I section frame. Decimal equivalents on thimble and reading is by thousandths	5.00
No. 463 Starrett Micrometer, as above, 5" to 6"	6.50
Tubular Central Tool Co. Micrometer 0" to 1". Ball anvil point to measure accurately tubing & other rounding surfaces. Black C metal frame. Decimal equivalents on thimble and reading is by thousandths	4.25
Central Tool Co. Micrometer 4" to 5". Black flat C metal frame. Decimal equivalents on the thimble and reading is by thousandths	4.75
Central Tool Co. Micrometer, as above, 5" to 6"	5.50
Goodell-Pratt Spring Dividers No. 517, 8"	1.50
Greenfield Screw Extractor. Small end 3/8", large end 19/32"	.50
Brown & Sharpe Dial Test Indicator No. 730, complete	25.00

Send check, money order or cash. 25% dep. required on C.O.D. Orders.

Send check, money order or cash. 25% Deposit required on C.O.D. orders. All prices F.O.B. Culver City, Calif.

AIRBORNE SALES CO., INC. DEPT PSM 9-8 CULVER CITY, CALIF.

An ASSURED FUTURE for You
Learn Profitable WATCH REPAIRING

BIG MONEY WHILE LEARNING

Study at Home — or at Our Accredited School

Complete Home Correspondence Course or G. I. Approved Residence School Plan. Also, Post-Graduate Plan at school for correspondence students.

Write Today for COMPLETE DETAILS to

American Institute of Specialized Watch Repair

Dept. 200 270-76 East Building Grand Rapids, Michigan

NEW GEAR HEAD ELECTRIC MOTORS

¾-1 H.P. 110 volt AC-DC. Enclosed gearing. All bearings ball or roller. 2 speeds 275-375 r.p.m. Switch included. Rotation either direction. Price complete. **$37.50**

Send check or M.O. No COD's.

PRONTO MOWERS, OLDSMAR, FLORIDA

RADIO RULE!

TIME SAVER for radio engineers, draftsmen, technicians and students. 6" clear plastic rule and template for making quickly and accurately all common symbols: single and dual tubes with various elements, fixed and variable condensers, resistors, coils, battery, ground, voltmeter, relay, etc. ORDER TODAY $1 postpaid, money back guarantee, or send for FREE literature.

COLLETTE PRODUCTS CO., 25440 John R, Dept. R-5, Royal Oak, Mich.

SHATTERLESS "ALL PURPOSE" STEEL BOTTLE

HAS HUNDREDS OF USES — FOR LIQUIDS, GASES, STORAGE, AIR PRESSURE, ETC.



Formerly used by AAF for oxygen storage. You can use it now as an air pressure tank for inflating tires, operating horns, air motors, etc. May also be used as a buoy or float or for water supply storage on boats, trailers and trucks. Ideal as shipping container for gases, chemicals, etc. Bottle is non-shatterable with working pressure up to 500 lbs. psi., and weighs only 5 lbs. when empty. Internal volume 500 cu. in. (approx. 9 qts.) Has ⅝ in. pipe thread at each end. Approx. size 24 x 6 in. They won't last long at this low price. Guaranteed brand new. Order now!

REGULAR STEEL, EA. $2.95

Stainless Ea. $3.95

You pay transit charges. Mail orders promptly filled. Send check or money order. Satisfaction Guaranteed.

AERO PARTS SUPPLY, Dept. PS9

MUNICIPAL AIRPORT HOUSTON 17, TEXAS

locksmithing and key making

PRACTICAL UP-TO-DATE COURSE

How to pick locks, de-code, make master-keys, install, service, etc. New, self-instruction lessons for every handyman, home-owner, carpenter, mechanic, service station operator, fix-it shop, hardware dealer, gunsmith, cycle shop. Good steady money-making trade!

$3 EASY ILLUSTRATED LESSONS

Full price only **$3.95**, nothing more to pay. Satisfaction or your money back. Fill in coupon at bottom of page and mail today.

NELSON-HALL CO.
1139 S. Wabash Ave. Chicago 5, Ill.

watch and clock repairing

LEARN AT HOME—IN YOUR SPARE TIME

Prepare now for a happy future of prosperity, security. Fascinating high-grade occupation for men of almost any age or physical condition. You can earn while you learn.

PRACTICAL COURSE IN HOROLOGY How-to-do-it lessons for beginners as well as those already in the trade. Thorough self-instruction training in American and Swiss watches, clocks. Contains a wealth of helpful photos, drawings, diagrams, charts, etc. Only **$4.95** for everything, complete. Satisfaction or refund guaranteed. Mail no-risk coupon below.

practical RADIO servicing

SELF-INSTRUCTION COURSE Teaches you the practical side of radio . . . repair, adjustment, operation, alteration, trouble-shooting. No previous knowledge necessary. Prepare to set up a shop of your own—or train for the big industrial electronics field. Simplified lessons, including mathematics, review questions, problems, answers. Up-to-date! Only **$3.95**, complete. Money-back guarantee. Use coupon below.

REAL ESTATE BUSINESS

The foundation of all wealth is land! Train yourself for a career in this booming profession. Here is the information you need on how to get started and how to get ahead in real estate. Includes instructions in appraisals, valuations, management, investments, practical real estate operating, low cost housing, the law on real estate transactions including legal forms, etc., salesmanship, and many other subjects a successful real estate man must know. Strictly up-to-date. Complete, only **$6.95.** Money-back guarantee. Use No-Risk coupon below.

Short-Cut Mathematics
COMBINED WITH
Practical Mechanics Simplified

Be a "master mind." Learn how to juggle figures, do baffling tricks with numbers. Add long columns of figures this lightning-quick, short-cut way. Multiply 4 figures by 4 figures without old-fashioned multiplication. Here are speedy, simplified systems used by stage "wizards," expert accountants, engineers. Only **$1.49.** Course includes illustrations, problems, answers. Mail coupon below!

COMPLETE BLUEPRINT READING COURSE

Interesting, simplified self-instruction lessons for builders, mechanics, electricians, plumbers, welders, carpenters, automotive & aviation workers, etc. 24 volumes include over 600 actual blueprints, diagrams, other instructive step-by-step pictures. Unusual bargain for any practical man. Complete, only **$6.95**, postpaid. Satisfaction or refund. Coupon below.

BUILD IT YOURSELF

Be a practical handyman. Save time and money with these professional Tricks-of-the-Trade. Carpentry made easy! New self-instruction course in one handy volume, complete with full page photographs, diagrams, etc. Teaches woodworking, painting & decorating, upholstering, power tools, cabinet making, etc. Full price only **$1.98.** Money-back Guarantee. Mail coupon today!

Mail This No-Risk Coupon—Quick Action!

NELSON-HALL Co., 1139 S. Wabash Ave., Dept. J-01, Chicago 5, Ill.

Please rush me the items I am checking below. It is understood that if I am not 100% satisfied I will send the material back within 10 days and you will make full immediate refund, without question or quibble.

( )	Watch & Clock Repairing	$4.95
( )	Locksmithing & Key Making	3.95
( )	Practical Radio Servicing	3.95
( )	Real Estate Business	6.95
( )	Short-Cut Mathematics	1.49
( )	Blueprint Reading Course	6.95
( )	Build It Yourself	1.98
( )	Apartment House Management	5.95
( )	Jewelers' Encyclopedia	1.69
( )	How to Sell Life Insurance	6.95
( )	Complete Shorthand Course	4.95

☐ I enclose $.....in full payment. Ship postpaid.

☐ Ship COD for $.....plus postage and COD charges.

Name.....

Address.....

SERVICE STATION OWNERS

Don't let this happen to you!

USE "SAFETY-FILL" NOZZLE WITH AUTOMATIC CUT-OFF

Follow the thousands operating service stations who are purchasing their own. Investigate! You will find many already in service in your locality. The same nozzle as advertised in Saturday Evening Post and other publications.

Customers are beginning to demand "SAFETY-FILL" service. It sells more fill-ups because:



CUTS OFF AUTOMATICALLY WHEN TANK IS FILLED

NO SPILLING. WASTING GASOLINE

Underwriters approved. Mail your order today. Price **$15.22.** Prepaid nearest RR station. Send $3.00 for each nozzle ordered. Balance C.O.D. **SALES AGENTS WANTED**

RICHMOND OIL EQUIPMENT CO., INC.
1419-21-23 E. MAIN ST. RICHMOND 19, VA.

Say You Saw It In Popular Science

FENDER SKIRTS . . . . . $17.20 PER PAIR



For Ford, Chev., Merc., Plym., DeSoto, Chry., Dodge, Kaiser-Frazer, and Buick. Beautify your car . . . bring out the flowing lines inherently designed there. Sparkling beauty you'll like. Constructed of heavy gauge body steel, finished in prime, perfect fit.

SANDEE MUFFLER CO
Box 296, La Tijera Sta.,
Los Angeles 43, Calif.

Gentlemen: Please send me one set of Sandee Fender Skirts to fit my_____
_____(year and make of car)
☐ Check for $17.20 enclosed
☐ Ship C.O.D.

NOW! USE YOUR ELECTRIC DRILL for POLISHING! GRINDING! SANDING!

Work on curved or flat surfaces

You can use it to fix bodies, fenders; wax; polish cars, floors, linoleum; refinish furniture, wood, metal surfaces; smooth, reduce welds, etc.

Bends To Take Curved Surfaces

FITS ANY ¼ IN. CHUCK or DRILL, FLEXIBLE SHAFT, MOTOR, etc.

Designed and engineered for high speed sanding, polishing, finishing, etc. Full 6½ inch rubber face plate bends into curved surface. New clamp arrangement mounts sanding discs instantly—no cementing. Draw-string lamb's wool bonnet slips on for high speed polishing, finishing, etc. Outfit includes 6½" flexible rubber disc with ¼" metal shank, fibre backed sanding disc and heavy lamb's wool polisher. Equals $75.00 outfits in performance. You'll find hundreds of time saving uses for it. Fully guaranteed. Shp. wgt. 2 lbs. F.O.B. Chicago. Complete, only..... **$4.95**

At your favorite hardware store or direct.

PREHLER PROVED PRODUCTS
Division Norbert Prehler & Co.
Dept. PS 9—1623-25 Milwaukee Ave. Chicago 47, Illinois



INTERNAL CARVERS—CRAFTSMEN

SET OF SIX spring tempered, hardened steel BALL HEAD CARVING BURRS for plastics, metals and wood IN PLASTIC CASE, ALSO one No. 43 precision made High Speed TAPERED DRILL.

ALL FOR $2 Postpaid. Pay with Order.

A complete line of Tools, Machines and Materials for Craftsmen, Institutions and Fabricators.

CARADAY SALES CO.
81 Willoughby St. Brooklyn 1, N. Y.

Send This Ad

98% Nonskid
14 MO. GUARANTEE

HIGH TREADS, WORN SLIGHTLY	
Standard Brands — NOT RECAPS	
600-16	$4.60
650-15	4.40
650-16	4.60
700-17	5.25
700-18	5.75
700-15	4.75
750-16	5.50

600-20	$ 8.00
630-20	8.00
700-20	10.00
32x6(10)	9.25
825-20	12.00
900-20	13.00

OK'D BY ADJUSTER—"A.I."	
24 Months Guarantee	
600-16	$10
650-15	11
650-16	11
700-17	12
700-18	13
700-15	13
750-16	16
All other sizes, too	18
1000-20	18
900-20	16

750-20 Standard (18 mos)	$10
825-20 Super (18 mos)	11.50
900-20 Military Tread Tires	13.25

BLATT TIRE SERVICE
Cor. 49th & Lancaster Ave.
Bank Bldg., Phila., Pa.
We ship only triple inspected tires, we'd use ourselves

Year after year, hundreds of thousands of folks we've never met, send us their money in advance to save the C.O.D. chgs.

OH SHAW! WE KNOW OUR PRICES ARE TOO LOW—BUT IT'S YOUR GOOD FORTUNE

September **BARGAIN OF THE MONTH**

All 3 Items for $1.00

One AAF flying helmet
One pair flying goggles—with case
One canvas utility bag with straps (ideal for hunters, fishermen, Boy Scouts, etc.
Send **$1.** bill or money order.
All 3 items delivered postage free in U.S.A.



ADDITIONAL BARGAINS

Telephone wire, 2 conductor.....Ft. ½c
Telephone wire, spiral 4 cond.....Ft. 1c
Telephone wire, 10 conductor.....Ft. 4c
Switchboard-BD-71, used, excellent....Ea. $32.50
Switchboard-BD-72, used, excellent....Ea. $60.00
Moon test light, 110 v, ¼ watt.....Ea. 50c
Surgeons rubber gloves, Latex, new.....Ea. 96c
Rubber life raft, one man, with equip. Ea. $17.50
Life belts, Navy waist type—used, good Ea. $1.00
Leather flying helmet, new, small size..Ea. $1.00
Life Raft oars, Pair $2.00 **Bailing Bucket,** Ea. 50c

ARMY FIELD TELEPHONE

A private telephone and Intercommunications System

Excellent for factories, garages, shops, mills, mines, farms, homes, utility companies, etc. Simple to operate—insert 2 regular flashlight batteries, connect wire, push button and talk up to 20 miles. Complete with leather case in used **excellent condition. Each**..... **$9.00**

TELEPHONE AND REMOTE CONTROL

Excellent reception up to 50 miles. No external power required. So simple a child can operate. Has self contained generator and signal bell. French type and metal case. **Each**..... **$11.50**

Send 25% with C.O.D.'s—Prices F.O.B. Fresno, except where specified as postage paid.

FORTUNE & SHAW
2250 McKINLEY DEPT. PS-9 FRESNO, CALIF.

$$ GET INTO A $$ HIGH PAY TRADE NOW

Any skilled workman will tell you that men in the AUTO and HOUSEHOLD trades have the best of it. A steady, profitable business every month of the year! Now you can learn a trade by a simplified step-by-step program in Stevinson's shop-classrooms. Learn by ACTUAL EXPERIENCE with MODERN EQUIPMENT, under the guidance of expert instructors. **26 YEARS** of training and placing men in industry qualifies us as the school for **YOU.** WE ASSIST YOU TO FIND PART-TIME JOBS WHILE ATTENDING SCHOOL. CHOOSE ONE OF THE TRADES LISTED BELOW! Get into a high pay trade the STEVINSON way.

- ☐ AUTO MECHANIC
- ☐ AIR CONDITIONING
- ☐ ELECTRICAL APPLIANCES
- ☐ REFRIGERATION
- ☐ AUTO BODY AND FENDER REPAIRING

APPROVED FOR TRAINING OF VETS UNDER LAWS 346 & 16
OPENINGS NOW. WRITE TODAY!!

STEVINSON SCHOOL
2008 Main St. (PSM) Kansas City, Mo.

Say You Saw
It In Popular Science

SAVE on High Quality **GABARDINE** Dress Trousers for Fall and Winter wear

$12.50 VALUE

$7.95 PR.

Huge direct-to-you volume enables us to give exceptional value! Fully guaranteed. Genuine virgin wool and fine-spun rayon blended. Warm. Twill weave resists wrinkles, holds crease, gives amazing wear. Expert fashion tailored for perfect fit. Zipper front. Roomy pockets. Blue, Tan, Sand, Lt. or Dk. Brown, Blue-Gray. WAIST: 28-38 pleated or 28-44 plain.

SEND ONLY $1 with name, waist size, 1st and 2nd color selection. Pay postman balance plus C.O.D. Or, send entire amount, save C.O.D. Money back within 10 days if you're not pleased.

LINCOLN TAILORS Dept. PS-9 Lincoln, Nebr.

PLAY PIANO BY EAR IN ONE HOUR

Complete, easy to understand Key Board Diagrams and Pictures show how to play any tune with BOTH HANDS in 1 hour. Original Radio Technique. Send only $1. Money Back Guarantee. **$1**

SID SMITH, 5992 W. Pico Blvd., Los Angeles, Calif., Dept. 1



PRECISION BALL BEARING ARBOR

A precision grinding and saw arbor built to operate at any speed up to 10,000 R.P.M. Has 1/8" double end shaft with 2" center pulley. New Departure double roll precision aircraft ball bearings. Right and left hand thread, 12" in length. Bearings alone list at $14.00. Complete arbor, new..... ONLY **$6.95** Postpaid

MONEY BACK GUARANTEE

ORDER TODAY. We pay postage if full amount accompanies order

C & H ELECTRIC CO., 436 W. Juneau Ave., Milwaukee 3, Wis.

ELECTRIC MOTORS

NEW-SURPLUS

1/28th H.P. 110 A C 60 CYCLE

2500 R.P.M. Minimum — 2750 Max — Start 90 V. Runs Clockwise. 1 3/4" long by 2 3/4" wide, 1/4" shaft. **$2.95**



AIRCRAFT GALLEY STOVES

Operates on 110 and 24 volts. Fine for trailers, boats, camps, etc. Includes steam table, hot cup, and grille. New, complete with all accessories. NEW **$19.95** EACH

SERVO UNIT

Control for the automatic pilot Makes good hoist or water pump. Operates on 24 volts. New, complete with 1/4 H. P motor. **$4.95** EA.

MOTOR & GEAR ASSEMBLY

Adaptable for garage door openers, electric hoists, rotating radio beams, etc. Lifts 2800 lbs. Operates on 24 volts. New, complete with 1/8 H.P motor **$4.95** EA.

LIGHT FIXTURES

New, complete with bulb Operates on 110 volt. **2 FOR $1.95**

All prices F.O.B. Detroit. Send cash or money order. No C.O.D.'s—Orders shipped by railway express.

RADIO CENTER

2530 E. Davison **Detroit 12, Mich.**

LEARN TRIG QUICKLY — EASILY



BY COMPETITIVE TESTS,

it was found that QUICK TRIG gave answers faster to one with a slight knowledge of trig than to an expert on trig with a slide rule. Let it solve your trig. problems. You need no previous training. Entirely automatic. Easy instructions included FREE. We mail C.O.D. plus postage or send $1.00, the full price, and we mail postpaid.

REED MFG. CO., 11350-B Burbank Blvd., N. Hollywood, Calif.

WAR SURPLUS VALUES

NAVY T-SHIRT

Brand new. First quality. Snowy white. Soft fine knit cotton. Sizes small, med., large. **3 for $2**

PILOT'S GLOVES

Brand new. Air Corps surplus. Very soft, pliable leather, unlined. Ideal for driving. Sizes 9 and 10. **2.25**

Money Back Guarantee

AVIATORS' JACKET

Brand new. Air Corps Type B-15. Fully alpaca lined, including sleeves. Zipper front. Large mouton fur collar. Sizes 34 thru 44..... **14.95**

NAVY JACKET

Brand new. Navy N-1 Jacket. Fully alpaca lined. Zipper and button front. Sizes 36 thru 44..... **13.88**

Sent Postpaid if Money Enclosed - C.O.D.'s Sent Charges Collect

NATIONAL JOBBING CO.
1703 No. 24th St. Dept. 1-4 Omaha, Nebr.

OFFICERS' PINKS

Brand new. Fine quality officers' elastique trousers Sizes 29 thru 42. Reg. $17.95 value. **11.50**

NAVY KNIFE

Brand new. Tempered steel 3 1/4 inch "Parkerized" blade Laminated leather handle. Complete with sheath. **98c**

Send for FREE CATALOG

WAR SURPLUS AND HUNDREDS OF OTHER BARGAINS

STOP WATCH

Genuine Elgin 15 Jewel movement. Ideal for split second timing. Full sweep split second hand graduated in 1/10th seconds. Stem wind, start, stop and reset. Used but guaranteed perfect. A splendid value. Shp. wgt. 1 lb. **No. 200**—Each..... **$9.95**

MESS KITS

Regulation two-piece Army Mess Kits with folding handle. Used, but perfect. Weight 2 lbs. **No. A116**—Ea.. **69c**

CANTEENS

Reg. U. S. issue canteens. Plastic screw top chained to body. Slightly used but perfect. Wgt. 1 lb.
117—Metal
118—Plastic—Ea. **69c**

CANTEEN CUPS

All metal. Folding handle. Wgt. 1 lb. **No. A120**—Each..... **25c**

CANTEEN COVERS

Heavy canvas. Button fastener. New **No. 530**—Each..... **69c**
Used **No. 119**—Each..... **35c**

WIRE CUTTER

Heavy duty type with compound leverage. Cuts up to ¼ inch wire. Extended upper jaw acts as feeder to cutting edges. Insulated handles. Ideal for farm fence work and shop use. Shp. wgt. 2 lbs. **Stock No. 392**—Each **$1.95**

Heavy Duty Rubber Gloves

BRAND NEW

Extra heavy—extra long. Brand new, high quality gum rubber for softness and ease in use. Designed for heavy duty industrial service — protection in handling chemicals, acids, etc. A real bargain at this low price. **Stock No. 295**— Per Pair, Only..... **79c**

AVIATOR'S OXYGEN OUTFITS

Bail out type. Consists of all metal tank, release valve, gauge and breather hose, all enclosed in khaki colored cloth bag. These tanks are loaded with oxygen at 1800 pressure. Ideal for use as reserve oxygen supply for all types of emergency use. Shipping weight 4 pounds. All brand new.
Stock No. 391—Each.... **$4.95**

OXYGEN TANK

Loaded with aviator's breathing type oxygen at 1800 pounds pressure. Tank measures 13½x5½ inches with rounded ends. Tank is of solid metal fitted with brass release valve at top. Brand new! Loaded—ready for all types of emergency use. Shp. wgt. 13 pounds. Ship exp. only! **Stock No. 390**—
Each, only..... **$3.50**

POPULAR RECORD ASSORTMENT

Fifty records of modern dance, race, blues and hillbilly selections. No two alike. Famous name bands and artists included. Used in juke boxes, but guar. perfect. Shipped exp. collect only—no exchanges or refunds. Wgt. 28 lbs.

No. A300—25 Records. All Dance. Wgt. 14 lbs..... **$4.88**

No. A301 — 25 Records, Hillbilly, Race and Blues. Wgt. 14 lbs. Set.. **$4.88**

No. 302—25 Records. All Hillbilly numbers. Wgt. 14 lbs. Set.. **$4.88**

FLEX. NECK FLASH LIGHT

Ideal trouble shooter's flashlight. Flexible neck lets you direct light around corners and inaccessible spots. Brand new! Plastic case with RX type neck. Uses 2 standard flashlight batteries. (Less batteries) Shp. wgt. 2 lbs.

Has spare bulb in handle.
No. 208 Each **$1.39**

ELEC. MOTOR

Small but powerful. Shaded pole type, designed for fan application. 115 V 60 cycle. Has ¼ inch shaft, one inch long. Operates at 3150 RPM under no load, 2000 RPM under load. 2.33 oz. inches load. Full load current .6 amp. Ideal for use on toys, window displays, etc. Shp. wgt. 1½ lbs.
Stock No. 355 ... Each only..... **$1.95**

PUP TENTS

Regulation Army Pup Tents of durable, brown canvas. Used, but in good condition. Fine for campers, outdoorsmen, Boy Scouts, etc. Wgt. 8 lbs. **A100**—Tent only.... **$3.95**
A110—Tent, new **$7.95**
A101—Ropes, wooden poles and stakes for above. Per set..... **$1.00**

ARMY AIR CORPS TYPE

SUN GLASSES

Ideal for driving, sun glare, sports and work. 24 carat gold plate frames with Pyralin sweat bar — adjustable nose bands. Large aviation type lenses. Case included. Shp. wgt. 1 lb. **No. 238**—Per Pair..... **$2.95**

VEEDER ROOT COUNTING MACHINE

Five wheel type—counts to 9999 and repeat. Nickel finish case. Has ¼ inch round shank. Use it for any counting job. Brand new. Shp. wgt. 1 lb. **No. 241.** Each..... **98c**

7 LB. EXPERIMENTER PARTS ASSORT. KIT

A "gold mine" for the radio serviceman. Hundreds of valuable radio parts, new radar and electronic parts and subassemblies, coils, resistors, trimming condensers—worth many times this low price. **A1308**—7 lbs.... **$1.79**

ARMY TENTS

16x16 Ft.

A value you can't beat. Big 16x16 ft. pyramid tent with 4 foot drop wall. Used but in excellent condition. Poles not included. Fine for camping out, carnivals, etc. Worth twice this money. Shp. wgt. 100 lbs. **Stock No. $21**—Each only.... **$35.00**

STIRRUP PUMP

Works with any pail or bucket. Shoots a high pressure stream up to 30 feet. Use it for spraying garden and trees, for whitewashing, fire fighting, drainage, etc. Complete with 10 foot flexible hose. All brand new. Regular $3.80 value. **No. 244**— Each..... **$1.49**

2-Pc. Rain Suits

New 2 piece rain suits. Of durable wear resisting water and wind repellent OD fabric. Bib style pants, zipper fly. Jacket has parka attached. Guaranteed 100% weatherproof. Small, medium and large sizes. Shp. wgt. 3 lbs. **No. R549** Each..... **$4.95**

BAYONET BLADE



Fine forged steel. Ground but not polished. May be made into throwing or hunting knife or spear. Blade 6¾x¾ inches. 11⅝ inches overall. Will take and hold a fine edge. Shp. wgt. 1 lb. **No. 684-R**—Each..... **49c**

STRANDED AVIATION CABLE

Flexible 133 strand wire cable, 5/32 inch diam., 3300 lb. break test. Lengths up to 450 feet. Use as tow rope, guy wire, clothes line, etc. Weight per 100 feet, 4 lbs. Specify length wanted when ordering (minimum 100 ft.). **Stock No. 421.** Per Foot..... **4c**

Officers Watch Compass

Brand new gov't. surplus. Army-Navy model. Single jewel mounted needle. Silver colored dial. A splendid value. Shp. wgt. 1 lb.
A174—Each.... **98c**

McCLELLAN SADDLE

Brand new! Top grade cowhide. 12 inch seat. Hair girth. Has straps for blanket roll and knapsack. Gun boot and sabre loops. A real buy for any horseman. Worth muchmore. Shipping weight 15 lbs. **Stock No. A145.**
Each..... **$16.95**

NYLON PONCHO

Fine waterproof nylon in olive drab finish. Gives real protection from storm and rain. Ideal for farmers and outdoor workers. Shipping wgt. 2 lbs. **No. R160.** Each only..... **$3.95**

AMMUNITION BOX

Used for 50mm ammunition. Heavy, all metal design with latching top and folding handle. Provides safe, fireproof storage for valuables, etc. Measures 12x6x7½ inches. Used but in new condition. Shp. Wgt. 8 lbs. **No. 338**—Each **79c**

RUBBER SUIT

Fits over your regular clothes and shoes. Can be cut apart for waist high waders, hip high or knee high boots. also arm length rubber gloves. Heavy gum rubber over fabric. Fine for those who work in the water, commercial fishermen, sewer diggers, etc. All brand new! Wgt. 14 lbs. **No. 183**—Each..... **$4.95**

Please add 75c for postage.

HIGH PRESSURE 400 LB. TEST SHATTERPROOF TANKS



TYPE D2

A high pressure shatterproof tank of 500 cubic inch capacity—for 50 pound pressure or 6.9 cubic feet. All metal—measures 6½x24 inches. Threaded plug end vents. Shp. wgt. 6 lbs. **No. 388**— Each.. **$2.45**

TYPE F1

A high pressure shatterproof tank of 1000 cubic inch capacity—for 50 pound pressure or 13.8 cubic feet. All metal—measures 9½x17 inches. Threaded plug end vents. Shp. wgt. 11½ lbs. **No. 389**— Each.. **$3.75**

ORDER DIRECT FROM THIS AD

Values galore! Hundreds of hard-to-find items for home, shop and outdoors. Make remittances by money-order, bank draft or personal check. Send 25% deposit on C.O.D. orders. No C.O.D.'s on orders for less than $5.00. Include sufficient postage on parcel-post orders—any overage will be promptly refunded. All quotations F.O.B. Chicago. Used items and materials are guaranteed serviceable and as described. Your money back if not more than satisfied.

SEND 10c TO COVER POSTAGE AND MAILING ON BIG CATALOG—READY IN ABOUT 30 DAYS
WRITE FOR YOUR COPY TODAY

STARK'S

Dept. P59
509 S. State St.
CHICAGO 5, ILL.

LIFE PRESERVER BELTS

Right from the invasion beaches. Consists of two air chambers. May be inflated automatically with 'sparklet' cartridges or manually by attached hose. Adjustable in waist size. These belts are guaranteed brand new and air tight. You'll use them at the beach when swimming, for making life rafts—or in your boat as a life preserver. **No. 1261**—Each **$1.00**

SPARKLET CARTRIDGES

May be used with above belts. In boxes of 10. **Stock No. 254.** Per Box..... **50c**

POPULAR SCIENCE Classified Opportunities

Save time—Save Money

Classified Ads only 80c per word per insertion, payable in advance. Minimum ad 10 words. To be included in November issue, copy should be in our office by September 23rd. November issue on sale November 1st.

POPULAR SCIENCE MONTHLY—351 FOURTH AVE.—NEW YORK CITY 10

1 AUTOMOBILES

RACING Car Equipment for all cars. Engines. Racing Heads. Manifolds. Carburetors. Mufflers, etc. Speed instructions and literature $1.00—refunded first order. Lee Motorcraft Co., 1412-B Great Northern Bldg., Chicago 4, Ill.

DUALTONE Crystalline packed California mufflers for all automobiles. Large chrome tailpipe extensions. Chromed carburetors, fuel pumps, long shackles, dual manifolds, hi-compression heads, flywheels, camshafts, fender skirts, plexiglas tops. Send 20c illustrated catalogue, deduct from first order. Dualtone Mufflers, 2636B India Street, San Diego 1, Calif.

"VAPO-STEAMATIC" Water Injection. Easily constructed (for less than $1.00). Finest automatic "Moist-Humidity" system. Engineering triumph—gets up to 33 miles per gallon. Tremendously increases horsepower! Eliminates ping, carbon, overheating. Reduces wear—lengthens engine life! Copyrighted "Installation Handbook"—(illustrated)—including "Mileage Information," Parts Lists, Picture Catalogues, etc.—$1.00 complete. Newhouse Automotive Industries, 5941-A1 Hereford, Los Angeles 22.

"SPEED and Power" Handbook—Very latest methods! Construct your own superchargers, water injectors, compression heads, fuel saving devices—easily, practically without cost. Get racing speed, acceleration, dynamic power increases from any automobile! Build stock conversions! Fast roadsters! Hotrods! Get ingenious formulas! Speed secrets! Also "Economy Information"—Tuning techniques! Ignition, Carburetion, Fuels, Mileage tricks! Illustrations! Catalogues. Including "California Restyling Ideas"—Glossy photographs! Drawings! Model revising! Customizing! Streamlining! Sport changes! Leather-like bound—$1.98 complete. Newhouse Automotive Industries, 5941-A2 Hereford, Los Angeles 22.

AUTOMOBILE Racing, Sixth Edition, 100 illustrations. Working drawings with building instructions for Ford-60 midget, California roadster, Offenhauser racer. Details on racer parts. Sample entrance blank. World's record 158.5 M.P.H. rear engine four-wheel drive car. Interesting information for fans, drivers, mechanics. $2.00 postpaid; $2.25 C.O.D. Ray Kuns, Department 62, Cincinnati 27, Ohio.

AUTOMOBILE Racing Book. Fifth edition-revised. Tells how to build dirt tracks bodies, frames, engines. Records, superchargers, rules, formulas, plans, stock conversions, roadster racing, fast Fords. $1.00 postpaid. $1.15 C.O.D. Ray Kuns, Department 274, Madisonville, Cincinnati, Ohio.

FENDER Skirts—Factory direct—Streamlined to your fender contours—16 ga. Anodized aluminum with self latching brackets—No holes to drill. Teardrop skirts Chevrolet, Ford, Buick, Oldsmobile, 35-41. Streamlined Box Skirt Ford, 41-48. Specify year, model. Price F.O.B. $17.95. Send check, money order. Freight collect. E. and E. Mfg. Co., 5322c Banks Street, San Diego 10, Calif.

IMAGINE, 250 miles per gallon your car now. Literature 25c. Jet Engine Co., St. Augustine, Fla.

HOT-Rod manual, fast Fords, photos, instructions. $1.50 air mailed $1.75. Racing parts list $.25. Hollywood Hot-Rod Los Feliz, Box 9626 S. Hollywood 27, California.

BUILD speedy Midget Track Racer from cast off parts! Plans, specifications, construction information—$1.00. Motor Supply, Box CS-1682, Toledo, Ohio.

BUILD Automatic Clutch, midget autos, racers, scooters, tractors. 183 plans. Free handbook. Nichols Equipment Co., Dept. 1112, Purvis, Miss.

STUDEBAKER. Floyd Clymer's new book (no connection with Studebaker Corporation) gives impartial, uncensored report 3000-mile economy speed, record tests. Part by part equipment analysis. 3000 Studebaker owner opinion tabulations. 200 owner letters. Good, bad comments, no punches pulled. $1.50 postpaid. Clymer's book on Kaiser-Frazer same price. Clymer, Dept. B-9S, 1268 So. Alvarado, Los Angeles 6, Calif.

HOT Rod Racing Book. 90 photographs, illustrations famous record holders used California Dry Lakes. Contains hotrod tips, closeup action shots, specifications. 8 beautiful drawings suitable framing. $1.50 postpaid. Clymer, Dept. B-9V, 1268 So. Alvarado, Los Angeles 6, Calif.

FAMOUS Car catalog reprints. Duesenberg, Italian Maserati racing and new Sport car, Mercedes-Benz, new rear-engined Isotta-Fraschini V-8, Rolls-Royce "Silver Wraith," Miller Race Cars, Cord, Rayfield Cyclecar, V-8 Chevrolet, Stanley Steamer, Doble Steamer. Specify catalog desired. $1.00 each postpaid. Clymer, Dept. B-9X, 1268 So. Alvarado, Los Angeles 6, Calif.

INTERCHANGEABLE Parts Book. New book tells every automobile part that interchanges with others. Same parts many times vary 100% in price. This book enables garages, mechanics, dealers, owners to buy under cheapest listing. Tremendous savings for users. $15.50 postpaid. Clymer, Dept. B-IP, 1268 So. Alvarado, Los Angeles 6, Calif.

CLYMERTONE. Twin Muffler sets, beautiful sound, complete with necessary welded pipes. E-Z installation. Ford V-8, $20.00. Chevrolet set with split manifolds, $37.50. Specify car model. Clymer, Dept. B-94, 1268 So. Alvarado, Los Angeles 6, Calif.

HIGH Compression heads, V-8. More speed, acceleration, power. Offenhauser or Edlebrock $75.00 complete set. Dual manifolds complete with throttle kit, fuel lines. Edlebrock $49.00. Offenhauser $55.00. Give make, model V-8. Catalog 10c. Clymer, Dept. B-93, 1268 So. Alvarado, Los Angeles 6, Calif.

RACING Car Builder Book. 22 drawings. Racing rules. Contains information on cams, compression, balance, midgets, big cars, roadsters, V-8 speed data. $2.00 postpaid. Clymer, Dept. B-RB, 1268 So. Alvarado, Los Angeles 6, Calif.

CHEVROLET Instruction Book. 77 photographs, charts, drawings. A combined book on maintenance, servicing, 1938, 1939 and 1940 models. Complete manual necessary owner, repairman. $1.50 postpaid. Clymer, Dept. B-9N, 1268 So. Alvarado, Los Angeles 6, Calif.

MODEL A Ford Instruction book. Complete details care, maintenance, 35 charts, drawings. A must for "A" owners. $1.00 postpaid. Clymer, Dept. B-9W, 1268 So. Alvarado, Los Angeles 6, Calif.

CLYMER'S 1948 Indianapolis Race Year Book. Complete information, 100 photographs, charts, drawings, cartoons. $1.50. DeLuxe Fabrikoid bound $2.50 postpaid. Clymer, Dept. B-548, 1268 So. Alvarado, Los Angeles 6, Calif.

BRITISH Racing Cars. Illustrations, photographs, historical information on British racers. Sunbeam, Bentley, M.G., Riley, Lagonda, Austin, others. Just published. $1.50 postpaid. Clymer, Dept. B-9L, 1268 So. Alvarado, Los Angeles 6, Calif.

1949 MERCURY. Floyd Clymer's new book (no connection with Ford Company) gives impartial, uncensored report 3,000 mile economy, speed, record tests. Part by part equipment analysis. Good, bad comments. No punches pulled. Clymer's report on 1949 Ford, Kaiser-Frazer, Studebaker, $1.50 each postpaid. Clymer, Dept. B-9M, 1268 So. Alvarado, Los Angeles 6, Calif.

MODEL "T" and "A" Ford Instruction Book. 572 pages, complete information maintenance, servicing both models. 223 charts, drawings. Few unbound copies available $3.50 postpaid. Clymer, Dept. B-TA, 1268 So. Alvarado, Los Angeles 6, Calif.

CUSTOM California doll-up accessories. Solid hood sides, grille panels, lowering blocks, fender skirts, mufflers, speed equipment, chrome supplies. Picture catalogue with scores of items, 25c. Eastern Auto Supply, 3319 S South Grand, Los Angeles 7, Calif.

INSTALL V-8 engine in your Model A for extreme acceleration, more top speed, smoother performance. Complete details, photographs, $1 Postpaid. A-V-8, Box L-2, Eaglerock, Los Angeles 41, Calif.

MAKE your Ford fast! Complete details, photographs. How to construct 120 mph Hotrod, $1 postpaid. California Bill, Box L-2, Eaglerock, Los Angeles 41, Calif.

MAKE Your Model "A" do 100 mph. Lightning acceleration, breath-taking top speed. Complete details. Photographs. $1 Postpaid. Four Barrel, Box L-2, Eaglerock, Los Angeles 41, Calif.

CHEVROLET Speed manual now available to enthusiasts desiring real "hotrod performance" from their 1937 thru 1948 Chevrolets. Complete data and photos for building honest 110 mph road car, 130 mph hotrod roadster. Every page worth the total cost of only $2.00 postpaid. California Bill, Box L-2, Eaglerock, Los Angeles 41, Calif.

SEE our ad under motorscooters for midget car bargains. Midget Motors Directory, Athens, Ohio.

CUSTOMIZE Your Car! Authentic California restyling plans galore! Working sketches, specific model changes. Comprehensive; complete! 130 photographs! Largest, finest, or refund! $2 pp. Post Publications, Box 723-BC, Arcadia, California.

USED-Car Buyer's Handbook! Includes authoritative specific late model evaluations! Complete tests, dealers' tricks, graphic photographs! $1 pp. Post Publications, Box 723-TC, Arcadia, California.

SPEED Equipment Marine and automotive. We have only the best, made by leading southern California manufacturers including—Edelbrock, Meyers, Weiand, Winfield, Jahns, Offenhauser, etc. Complete line of high compression heads, dual manifolds, racing pistons, camshafts, dual ignitions, etc. Send 25c for illustrated catalog. So-Cal Speed Shop, 1104 S. Victory, Burbank, California.

POWER and speed equipment for all cars. Tops in heads, manifolds, cams, mufflers, etc. Save on Edmunds, Edelbrock, Offenhauser, Meyer, Weiand, or Knudson equipment. Harmon-Collins Camshafts. New illustrated list 25c. Chevrolet or V8 hopup instructions $1.00. Give make. Alden Motors, Oakland City, Indiana.

"SPEED & Mileage" Manual—Easily obtain greater speed, mileage, racing performance from any automobile! "Original" most complete book shows soup up methods—Speed Tuning—Mileage Secrets—Racing Tricks! Photographs! Instructions on building inexpensive speed equipment! Economizers! Custom Accessories! "Hot-Rods"! Speedsters! Fast Conversions! Engines! Sport Bodies! Superchargers! "Water Injectors"! Mufflers! All about "Economy Tuning", compression, manifolds, ignition, balancing, fuels! Latest "Hollywood Customizing", Streamlining information; Fascinating pictorial supplement; catalogues; diagrams; parts lists! Everything $1.98. Almquist Engineering, Milford 34, Pennsylvania.

"CUSTOM Styling" Manual—Easily make car look Hollywoodized, custom, ultra-beautiful by quick inexpensive methods! 100 photographs, instructions on customizing, restyling, streamlining—new and old cars. Also speed, model, sport, conversions; accessories; mufflers; engine "soup up" specifications! Complete $2.00. Almquist Engineering, Milford 34, Penna.

"SUPERCHARGER" Needle Valve—Increases speed, power, pep! Starting! 10% more mileage guaranteed! Free Trial! Quickly replaces idling jet. Specify Car. $1.98 each. (Eight's take 2, Six's 1). Almquist Engineering, Milford 34, Penna.

"SPEED Up, customize your car." Famous Racing—Speed Equipment—Beautifying Accessories—Mufflers—Dual Manifolds—Heads—Hollywood Disks—"Streamliners"—Skirts—"Superchargers"—Hotrod—Custom Supplies. Low Factory Prices! Handbook Catalog with photos, recommendations; 20c (refunded first order). Almquist Engineering, Milford 34, Penna.

"MIDGET Car" Book—Complete plans for easily building inexpensive midget racers, two passenger highway runabouts, "Streamlined Roadsters", 3-wheel cars, scooters, etc. Motor data, supply sources. 75 photographs, blueprints! $1.98 (guaranteed). Almquist Engineering, Milford 34, Pennsylvania.

"POWERIZER" Water Injector—Injector—Increases Speed, Acceleration, mileage to 30%. Easily assemble yourself for few cents! Sensational performance! Prevents wear, knock, oil pumping! Manual includes "Installation Drawings"—"Soup Up" Tips—Speed Literature. 98c. Almquist Engineering, Milford 34, Penna.

2 AUTO SUPPLIES & EQUIPMENT

PLATING Outfits For Autoparts. Connect to a battery. No tanks used. Outfits furnished. Free particulars. Gunmetal Co., Ave. K, Decatur, Ill.

AUTO parts for all autos and trucks. Trans. motors, differentials, fenders, carburetors. Also Body Parts. Security Auto and Truck Parts, 1923-PS Grace, Chicago 13.

AUTO parts. Buy direct. Get dealers' prices. Represent us in your territory. Write requirements. Specify car make. Mechanics Auto Parts, Factory Warehouse, 3807-PS N. Ashland, Chicago 13.

CHEVROLET Parts. Scarce motor, body, sheet metal parts. Grossman Chevrolet, Minneapolis, Minnesota.

MOTORISTS save gasoline by Vacumating overrich mixtures. Fits all cars. For Free particulars write Vacumatic, Dept. 1388, Wauwatosa, Wis.

THE A B C of water injection. Complete information Free. Advanced Automotive Products, 563-7 Lake Road, Webster, N. Y.

AUTO Parts, all kinds. Prices upon request. No catalog. Meyers Auto Parts, 820 Dryades, New Orleans, La.

CARBURETOR repair kits, electrical service parts, fuel pumps, etc. Carburetor Service, 600 LaPrairie, Perndale 20, Mich.

WELDING adds to your profits. Low cost repairs on bodies, blocks, fenders. Easy with Hobart Welders. Free Catalog. Write Hobartweld, Box P-982, Troy, Ohio.

AUTOMOBILE grilles—New. Buy from authorized factory distributor. Write immediately for our low prices. Grove Auto Supply, 4854 Cottage Grove, Chicago.

AUTO parts—new or rebuilt for all cars. Starters, generators, carburetors, clutch assemblies, transmission and differential gears. Everything you need. We have large stock—can ship fast. Write us—Grove Auto Supply, Dept. PS, 4854 Cottage Grove, Chicago, Ill.

VAPOR injection for Cars. Faster getaway, improved Climbing, eliminates knock Carbon, installs 10 minutes. $3.98 plus postage. Rad-Ar Products, 140-27 169th St., Jamaica 5, N. Y., Dept. P.S. 3.

MORE Gasoline Mileage. Free descriptive, illustrated, Instructions. Neherco, LaVerne 6, California.

CONVERTIBLE Tops—Completely sewn. Easily installed. Reasonable prices. Free literature. Rio Top Company, 1370 Roanoke, Newport News 15, Virginia.

SAVE gas! Instant starting. "Lektron" spark intensifier. Guaranteed! $1.25, (cash or C.O.D.) State make car. Free information. Electronic Industries, Cleveland 11, Ohio.

3 AUTO TRAILERS

BUILD Your own trailer! Save money! Have every feature you want! Plans for house, sport, camp and utility trailers. Catalog describing 9 models 10c. 15c in Canada and overseas. Jim Dandy, Box 125-B, Wausau, Wisconsin.

TRAILER plans, parts, accessories—complete line. Prompt delivery. Catalog 25c (coin). Catalog plus booklet, "Trailer Building," 50c (coin). Marine Mart, Buffalo 7-A, New York.

4 MOTORCYCLES, BICYCLES, SUPPLIES

WHEELS! Build wagons, scooters, mowers, trailers, wheelbarrows, grocery carts, baby carts, play pens, baby carriages. 4" to 16". Free list. Trulsen Mfg. Co., 811 E. 31, Kansas City, Mo.

"WRITE to American Moto Scoot Company, 1323 West Carroll Avenue, Chicago 7, Illinois, Department Z for Illustrated Scooter Parts Book and Latest Parts Price List 25c Stamps or Coin."

MOTO-Scoot—$35. Midget racer—$15. Indian Motorcycle—$30. Cushman Motorscooter with extra tire—$20. Motors—$3 and up, homemade Motorscooter—$10. Send 25 cents for new catalog listing these and many other sensational bargains in used motors, wheels, tires, motorscooters, midget cars, motorbikes, etc. Associated, Box 1764-CS, Toledo, Ohio.

EASILY build Professional Midget Racer, Motorscooter, Midget Roadster, or Midget Motorcycle from cast off parts. Plans, specifications for all four contained in illustrated handbook, 25 cents. Directory of bargain priced used parts and motors included free! Mid west, 3839 Drummond, Toledo, Ohio.

SENSATIONAL clutch operated Motorscooter $49.75! You assemble from our factory finished kits. Uses any gasoline motor. Complete plans, literature — 25 cents. Zipscoot, Toledo 6, Ohio.

MIDGET Car with three-speed transmission — $35. Cushman Motorscooter — $15. Shaw Bicycle Motor—$15. Harley-Davidson Motorcycle—$15. Motorbike outfit—$15. Rush 25 cents for special new catalog listing amazing bargains in motorscooters, used motors, tires, parts, midget cars, etc. Gall, 538 Erie, Toledo, Ohio.

MIDGET car factory built $40. 1½ h.p. Clinton motor $30. Factory built scooter $75. Three-speed motorcycle transmission $12.50. 1¾ h.p. outboard motor $40. Race cars, midgets and big cars. Hundreds of other bargains. Mail order only. Send 25c in coin. Behnke's, Dept. C., 5721 Leland, Chicago 30, Ill.

MOTOR Scooters, bicycle engines. 120 miles gallon. Dime for catalog. Clymer, Desk B-95, 1268 So. Alvarado, Los Angeles 6, Calif.

WHEELS, Tires, Tubes for Motor Scooters, Midget Cars, Wheelbarrows, and Industrial equipment. All sizes. Bicycle Parts, accessories. Largest stock in United States. Send dime for list. Cycle Transport Company, 1241 S. Michigan Ave., Dept. C, Chicago 5, Illinois.

1937 MOTORSCOOTER complete $35; 1931 Harley $20, poor engine; Whizzer Motorbike Motor $25; Harley Single engine $4; Maytag $3; Over 6300 small tires $1 up; Plenty brand new Regal motorscooters $37.50 less motors; plenty new midget cars. Send 25c for Big War-Bargain Catalogue Number 27, just out, listing these and hundreds of other bargains in motorscooters, midget racers, outboards, power mowers, engines, etc. (35c by First Class Mail). Midget Motors Directory, Athens, Ohio.

RECONDITIONED motorcycles and motors. Chromium accessories. Complete stock Indian parts. Expert rebuilding. Fast service. Indian Motorcycle Sales, Kansas City 1, Mo.

5 AVIATION

VETERANS: Be a pilot. Tuition paid under the G.I. Bill. Private, Commercial, Flight Instructor, Instrument, and Multi-engine Courses. Opportunities for part-time employment while studying. Ideal flying conditions. Write for information. Gottschalk School of Aeronautics, Adrian, Michigan.

PROPELLERS, 2-3 Blade. Sleds, air-drive boats. Catalog. Standard Aerocraft, Ft. Worth, Texas.

AVIATION Dictionary (Zweng) $6.00; Meteorology $3.00; War Surplus Sextants $12.50; Astro Compasses $7.50; F8 Aerial Cameras $139.00; Navy Barometers $17.50; Aircraft Clock $27.50. (Free Catalog). Fan American Navigation Service, 12021-D4 Ventura Blvd., N. Hollywood, Calif.

PROPELLERS, Plans for ice sleds, snow sleds, air boats. Catalog 10c. Banks-Maxwell, Ft. Worth.

7 ELECTRICAL SUPPLIES & EQUIPMENT

ELECTRIC Fans? Assemble your own. 16" correctly balanced aluminum fan blade, ½" bore, $2.25. 18" all welded guard, $2.50. Use any ordinary motor. No COD. Ted Riseman, 207 N. Fifth St., Springfield, Illinois.

LELAND Electric generators, 2.5 KVA, 120 volt, single phase, 60 cycle, with radio filter. Turning at 1800 rpm, produces 2500 watts. $125.00 freight prepaid. Hopfer & Company, 3124 East 14th Street, Oakland, California.

SURPLUS Items: Fractional horsepower synchronous Motors up to 75 inch ounces torque, some reversing, $1.00 to $4.50; Electrical Relays SPST, DPDT, Interlock, others, $1.00 to $5.00; Micro Switches to 10 amp. ratings, 50c to 90c; Magnet wire—enamel heavy formvar #18 to #29, 32c to 40c per lb.; small DC Solenoid Valves. Aeronautical Sales Company, P. O. Box 381 A, Niagara Falls, N. Y.

FREE Catalog—Motors, welders, welding supplies, generators, fencers, electric mowers, freezers, other electrical items. LeJay Company, Minneapolis, Minn.

LAMPS—Build own Originals, parts wholesale any amounts. Catalogue 10c. Brown Lamp Co., No. 501, Wellston, St. Louis 12, Mo.

FLUORESCENT lights. Make your own . . . ideal for home and shop. Complete electrical parts for 20-watt fixtures with detailed instructions. Also larger sizes Postpaid only $2.00. Write Fluorokit, 322 E. Reservoir, Milwaukee, Wisconsin.

GENERATOR and Motor commutator slotting machines. Terry Sales Company, Toledo 1, Ohio.

"CONSTAVOLT" selenium rectifiers! Full voltage at full load. New! Automatic! Free Booklet. Lectralabs-2, Wakefield, Rhode Island.

ELECTRIC Pencil: Engraves all metals $1.00. Beyer Mfg., 229-C Dixon, Uniontown, Pa.

RECTIFIERS: Ramyr Selenium Platers, 10, 30, 50, 100 amp sizes. Immediate shipment. Complete line of bronze baby shoe mounts. Write for list. Hollywood Bronze Supply, Dept. S, 1770 N. Vermont, Hollywood 27, Calif.

LAMP parts wholesale. Large variety available for building, repairing, or remodeling. Order in any quantity. New 1948 catalog 10c. Gearon Company, 27H South Desplaines, Chicago.

AMAZING Offer. New ¼ H.P. S.P. electric motors, only $13.90 while they last. Send $3.90 with order, balance C.O.D. N.E. Electric Co., 528 Medford St., Charleston 29, Mass.

8 WELDING, SOLDERING

WELDER—New portable champion special Transformer Welder; 110/220 volts, AC. 8 heat stages. Welds, brazes, solder, cuts all metals. Complete with electrode holder, helmet rods, carbons, fluxes, cables. Also special Flame Weld Torch. Easy to use. Full directions. Splendid for shop, farm and home repairs. Guaranteed. Only $27.50. Money back guarantee. Also resistor model. Now $14.95. Magic Welder Co., 239 PS Canal St., New York, N. Y.

WELD, cut, braze with gasoline! Amazing discovery releases tremendous heat cheaply from gasoline. Shatters welding costs. farm, factory, shop. Easily learned. Free lessons. Write: Matthews Manufacturing Co., Red Deer 22, Alberta, Canada.

RADIATOR Repairing. Our low priced self instruction system will finish teaching you. Radiator Service and Supply, McBain, Michigan.

"POWER-Welder"—New Combination AC Welder-AC Power Plant. Portable. Go anywhere after profitable jobs. Makes you independent of power lines. Gives you welding, plus power for tools, lights, motors. Free Catalog. Write Hobartweld, Box P-983, Troy, Ohio.

"BUILD-Ur-Own" portable arc welder. Save $350. Easy with Hobart generator plus auto engine. Free instruction book. Write Hobartweld, Box P-984, Troy, Ohio.

WELDING—a profitable trade. Learn quickly at best equipped school in U. S. G.I. Approved. Demand for trained men. Write Hobart Welding School for free catalog. Box P-985, Troy, Ohio.

OXY-Acetylene small cylinders sold outright by largest Linde mailorder distributor of Purox welding & Cutting apparatus. Oxweld rod & Supplies. Freight prepaid in U. S. Free literature. A-A Welding Supply Co., Dept. B, 2228 So. Ada Street, Chicago 20, Illinois.

TRANSFORMER Welders 110 V. Welds ¼" Steel $23.50. Morris Welding Service, 1350B State, Schenectady 4, N. Y.

LOWEST Prices on A.C. Welders—Write Holgerson Co., Canton, Kansas.

OXY-ACETYLENE Welding outfit—New. Includes everything: two full oxygen and acetylene cylinders, torches, goggles, lighter, regulators, hose, welding rod, and carrying case. Only $89.75. Cylinders refilled anywhere. Ideal for hobbyists, garages, repair shops. Guaranteed. Burdett Oxy-Weld Co., 3399 Lakeside Ave., Cleveland 14, Ohio. Welding supplies since 1923.

9 AIR CONDITIONING & HEATING

LEARN Air Conditioning. Enormous earnings. Write Don Nelson, Warner Robins 7, Georgia.

10 MACHINERY, TOOLS, SUPPLIES

SURPLUS Items: Fractional horsepower synchronous Motors up to 75 inch ounces torque, some reversing. $1.00 to $4.50; Cut brass Gears—15 to 90 tooth with hubs. 35c to 70c each; Wide variety stainless, ferrous and non-ferrous Bar Stock and Tubing; Diaphragm Valves; Interval Timers. Detailed Price list Free. Aeronautical Sales Company, P. O. Box 381 A, Niagara Falls, N. Y.

WAR Surplus in small tools for machine shop—Send 15c for bulletin. Travers Tool Co., Dept. S, 5 Court Square, Long Island City 1, New York.

SHEBEL Saw Filer files all saws. Circular. A. P. Shebel, 730 S. 2nd St., Milwaukee 4, Wis.

CONCRETE Block machines from $39.50. Catalog free. Concrete Equipment Company, 5466 Gravois, St. Louis 16, Missouri.

POWER Driven Coal Chutes for Fast Easy Coal Truck Unloading. Salem Machinery Co., 341 W. 10th St., Salem, Ohio.

REVOLUTIONARY new stainless steel ruler. Place across diameter and it shows both area and circumference directly. No calculations necessary. Other side bears standard inch ruler. $1.00. Technical Development, Box 685, Port Washington, N. Y.

16" AND 26" size jigsaws. Ten Dollars & Fourteen Dollars, mail money order. Shellington Machinery, 2055 W. Hunting Park Avenue, Phila. 40, Pa.

SURPLUS machine shop equipment; good tools, low prices. South Bend 11" x 4' Quick Change engine lathe $375. South Bend 16" x 6' Loose Change gears $350. 14" x 6'—$160. 16"—$180. Small Brown & Sharpe Universal Miller $180. Large size B & S miller $370. 20" Upright Drill $110; 22" with back gears $160. Atlas bench shaper $300. Hendey 22" Shaper $380. Racine 6" x 6" Power Hack Saw $130. Hobart 300 Amp. Arc welder $220. 3 H.P. single phase motor $85. Guaranteed satisfaction or your money back. Conversion Parts Co., 277 Adams St., Boston 22, Mass., U.S.A.

BACK geared metal and wood cutting 12" band saw. 6" jointer, ball bearing. 47" long. Ball bearing spindle shaper. 15x20" table. 8" bench saw, tilting table, ball bearing. Lowest priced line of high grade tools on market. Free catalog. Backus Machine Co., Boyd, Wisconsin.

BENCH Grinder. Oilite bearings. Takes 6x1 wheels. Wheel guards, tool rest. 2" pulley. $6.95 Postpaid. U.S.A. Guaranteed. Check or M.O. Whittier Specialty Co., Whittier, Calif.

CHUCKS. (Genuine Westcott) Independent, Universal, threaded 1½"—8 for South Bend, Atlas, Logan, Clausing, Craftsman lathes. Also other chucks to 16". Top value. Free literature. Westcott Chuck Co., 3700 Walnut, Oneida, N. Y.

DRILL GRINDER for twist drills $2.95. See ad on page 278.

NEW. Encyclopedia of Machine Shop Practice $2.98. Universal Machinists Handbook $2.00. Sanford Sales Company, 158-10 Sanford Avenue, Flushing, N. Y.

HOMECRAFTERS tools, equipment and machines, wholesale prices. Kalder Engineering, Grand Rapids 6, Mich.

METALS; Aluminum, brass, steel in all shapes. Catalog 10c refundable. F & H, 87 Warren Street, New York 7, N. Y.

SPOT Facers, Counter Bores. New—used. 50%, 75% off list. 3/16" to 2" by 32nds. Also Pilots. Write for list of uses. Cuts 1" hole on bench drill. Also drills, reamers, milling cutters. List Free. Midwest Surplus Sales, 2533 Indiana, Kansas City, Mo.

14 BOATS, OUTBOARD MOTORS, ETC.

FULL size, cut to shape boat patterns, blueprints, 7½—38 feet. Illustrated "Build a Boat" catalog, 10c (coin). "How to Build Boats" book, $1.00. PolyWog Houseboat Plans $10. Cleveland Boat Blueprint Co., Dept. A-77, Cleveland, Ohio.

MARINE fittings, accessories — Thousands of items (pictured priced)—Prompt delivery. Catalog $1.00. Marine Mart, Buffalo 7-A, New York.

BOAT blueprints—Full size patterns—60 designs by naval architects—Row, power, sail. Catalog 25c—(With builders' handbook, "Plywood Boats," $1.00). Marine Mart, Buffalo 7-A, New York.

OUTBOARD motors—good values, used motors. Also used parts for most makes and models. Crandall-Hicks Co., 912 Commonwealth, Boston, Mass.

MARINE conversions for Ford and Jeep engines. Catalog 10c. Lehman Manufacturing Company, Department A, Newark 2, New Jersey.

AIRPLANE Jettison tanks—streamlined. 10½ Foot, tear drop shaped, 165 gallon, 20 gauge steel, weighs 75 pounds, ideal for boats, etc. $12.50. $9.75 each three or more, freight prepaid. No C.O.D. orders. Tanks shipped halves nested with gasket. Bolts not included. General Sales, 205 Market S.W., Grand Rapids 3, Michigan.

BOAT kits—See display adv., page 262. Marine Mart, Buffalo 7-A, New York.

CANVAS covers, new, 20'x34' heavy OD; water-fire-mildew resistant; grommets, ropes; war surplus, $65. Also paints, clothing, tents. Morgan, 10-17P 50th Ave., Long Island City 1, N. Y.

BUILD Your Own Boat from our paper patterns. Thirty designs, 7-54 feet. Send 10c for folders. Illustrated book on small boat construction $1.50 postpaid. Germain Boat Company, Dept. 1, W. Saginaw, Michigan.

15 ENGINES, MOTORS, ETC.

WINDING Data, listing 225 motors, single and three phase, $1.00. Motor Data, Box 7631, Kansas City 3, Mo.

MOTORS! ½ HP DC converted to AC. All new. High speed 110 volt, 25 or 60 cycle, ball bearing motors. Actual value about $75.00. Now $15.00 each or 3 for $40.00. With forward and reverse switch $19.50, 3 for $50.00. Countless uses for home mechanics. Can be used in any position. Order today! Immediate delivery! No C.O.D. order. "Amazing Bachman's," 27 Herman Street, Rochester 5, New York. Dept. PS.

ELECTRICAL repair men, send for literature on Motor Winding tester and A.C. motor winder. Motor Industries, Quincy, Illinois.

WATER-motors all sizes for any purpose. Rotary and Semi-rotary. Duplex Motors, Burlington, Iowa.

NEW 1 H.P. Gasoline Engines Only $39.95. Regular $59.95 Value. Nationally Advertised Brand. Limited Supply. Box 61, Acton, Indiana.

16 AMERICAN POLICE JIU JITSU

DEADLY Judo—Fiercest fighting technique. Trick knockouts. (200 photographs—plus illustrations.) Expert instructions—Three volumes. Complete $2.25. Variety House, Box 46-A, Wall Station, N.Y.C. 5.

18 BODY-BUILDING COURSES

HANDBALANCING! Learn quickly at home. Write. Power, 923 W. Vine, Kalamazoo 44, Michigan.

BARBELLS! 95 pound set $10.80; extra plates 10c pound. Send for free course and catalog. Bur Barbell Company, Lyndhurst, New Jersey.

BARBELLS, Dumbbells, Exercise equipment, Courses. Free booklet. Good Barbell Co., Reading, Penna.

19 SPORTING GOODS, GUNS, FISHING TACKLE, ARCHERY

"SHOTGUNS"—"Rifles"—"Handarms"—"Ammunition"—"Rods"—"Reels"—List 10c. PS-Rudolph's, Atchison, Kansas.

BOWS-Arrows, write headquarters for Archery equipment. Quality products. Popular prices. Catalog 10c. Large illustrated hand book instructions, aiming and shooting. 50c. Archery, 617-A So. State, Chicago 5.

180 PAGES antique and modern pistol, sword, etc. values, 50c. Robert Abels, 860½ Lexington Ave., New York 21.

5,000 BARGAINS, firearms, binoculars, war relics, catalog 40c, Smith Museum, Runnemede, N. J.

SEND 10c for list 100 used guns. Frayseths, Willmar, Minn.

COMPLETE design, model, light manufacturing facilities. Jones Sporting Goods Mfg. Co., Banning, Calif.

SHOTGUNS, Rifles, Revolvers. Over 500 Modern, Obsolete. Also Cartridges. List .10 coin. Ed Howe, 26 Main Street, Coopers Mills, Maine.

20 FIELD GLASSES, TELESCOPES, ETC.

TELESCOPES, Binoculars, Microscopes,—big bargain catalog free. Brownscop Company, 24 West 45th Street, New York.

4" ACHROMATIC lenses, perfectly figured. $45.00. James Bray, 860 Walnut Ave., Burlingame, California.

TELESCOPES & Binoculars—Saturn Coated 20 Power Telescope $25.00. Guaranteed. Tinsley Laboratories, Dept. 35, Berkeley 4, California.

POWERFUL astronomical Refracting telescope, equatorially mounted, all metal, two eyepieces, $16.50. Bluhm Optical Lab., 4213 Gifford Ave., Cleveland 9, Ohio.

ASTRONOMICAL Telescopes, binoculars, microscopes; Bought, sold, repaired. Books. Lists 10c. Rasmussen-Reece, Amsterdam, N. Y.

GIANT Astronomical telescope 100 diameters magnification, with tripod. Full power, clear vision, $15.00. Suffolk Science Service, Manorville, N. Y.

POWERFUL Astronomical telescopes easily made. Perfect lenses and instructions: 100X $3.00, 100X and 200X $4.00, 100X, 200X, and 400X $6.00. Clear Vision, full power guaranteed. Instructions alone 10c. Suffolk Science Service, Manorville, N. Y.

BUILD extraordinary reflecting telescope—Principle of 200" mount palomar. Complete optical parts including fully polished and aluminized mirror, eyepiece lenses and "flat." 3" (40 power) $6.00; 4" (60 power) $10.00; 5" (80 power) $15.00. Simple instructions. Sharp, clear definition guaranteed. Also spotting and bird use. Thousands satisfied makers. Do not confuse with inferior items offered at any price. Bulletin 10c. Ross, Section B, 68 West Broadway, New York, N. Y.

REFLECTING Telescope Kit. Consists 3" diameter aluminized mirror—Diagonal—erect image eyepiece 25x-50x-100x- powers—Tube, etc. assembled in one hour. Interesting work. Achromatic planetscope ready view hundreds fascinating celestial wonders plus terrestrial spotting. $5.00 postpaid. With tripod, $7.95. Postcard brings plans—list outstanding optical values. Pfleegor Optical Co., PS-9, Sunbury, Pa.

24 DOGS, BIRDS, PETS, RABBITS

RAISE Chinchilla rabbits. Year-round money-makers from furs, meat, breeders. Experience unnecessary. Write today. Willow Farm, Sellerville 16, Pa.

$5,000 YEARLY possible raising Angora rabbits our Co-operative marketing plan. Associated Angora Breeders, Stanton, Cal.

$250 MONTHLY. Raising Angora Rabbits. Particulars free. White's Rabbitry, Newark, Ohio.

RAISE Guinea Pigs. Make money at home. Big demand. Booklet free. Taylor, Box 426B, Hapeville, Georgia.

REGISTERED Irish Setter Pups. Beauties. Sired by Champion Finefield Invasion. Grasmick, 3105 So. 20th, Lincoln, Nebr.

ANGORAS. Giant Chinchillas, white giants—World's most profitable rabbits. Finest pedigree, heavy producing, prize-winners. Literature free. Grinsteads, Edwardsville, Illinois.

$3,000 RAISING Pedigreed and Registered Angoras. Vaughn's Rabbitry, Otley, Iowa.

HOBBY Catalogue 10c. Reptile List 5c. Chameleon 25c. Hamsters $2.75 pair. Quivira Specialties, Topeka, Kansas.

SEE Gulf Hamstery ad page 44. Shows picture of Hamster.

26 FUR FARMING

MINK from best stock priced reasonable. Carlson Mink Farm, Stromburg, Nebr.

27 MILK GOATS

RAISE Dairy Goats. All about goats and goat milk in big, illustrated monthly magazine. Sample copy 25c. Special Introductory year subscription only $1 (regular $2 a year). Booklet, "Primer for Goatkeepers", Free on request. Dairy Goat Journal, Dept. 868, Columbia, Mo.

30 FARMS, OTHER REAL ESTATE

OZARK Lands for All purposes. Actual river frontages. 5 acres $90.00 and upwards. Free list and literature. Hubbard, 624-H, Minnesota Ave., Kansas City 4, Kans.

CHEAP Homes, stock, dairy, garden, fruit, poultry farms, for retiring, strong, sick, folks. For hunting, fishing, longevity, health, happiness in Scenic, mild Ozone, write G. W. Starr, Ozone, Ark.

RAYBURN'S Ozark guidebooks. Eureka Springs 5, Arkansas. For homeseekers. 256 pages. $1.00.

OZARK farm bargains. 5 to 5,000 acres. A. Frank, Mountain View, Mo.

HOUSTON, Bright Spot of the Nation offers opportunity to investors, homeseekers, details free. Realtor, Box 202, Houston 1, Texas.

GOOD FARMS—Ranches, Washington, Minnesota, Montana, Idaho, Oregon, North Dakota. Dependable crops, favorable climate. Write for literature, lists describing typical farm opportunities. Specify which state. J. W. Haw, 120 Northern Pacific Ry., St. Paul 1, Minn.

JUST Out! Strout's New Fall-Winter Farm Catalog—Free! Red Cover. Chock-full of bargains Coast-to-Coast. Equpd. & unequpd. farms, groves, retirement places, etc., etc. Write today for your Free copy. Strout Realty, 255-ZB 4th Ave., New York 10, N. Y.; 20 W. 9th St., Kansas City 6, Mo.; 453 S. Spring, Los Angeles 13, Calif.

31 POULTRY AND SUPPLIES

RAISE Fryers new easy way. One-man home plant earns $500 monthly. Details free. Fortune Fryer Farms, Box B, Simi, California.

32 PROFITABLE OCCUPATIONS

DETECTIVES Earn Big Money. Excellent opportunity. Detective Particulars free. Write, Wagoner, P-125 West 86th, N. Y.

MAKE money this easy way at home. Make your own costume jewelry. Pleasant, interesting. No experience needed. We supply settings and sparkling rhinestones at wholesale prices. Steady profits. Write for details now. Sparkle Mart, Dept. D, 475 Fifth Avenue, New York.

EARTHWORMS—For soil building & better composting—Send for free folder. Coolville Earthworm Farm, Coolville, Ohio.

IF you work in a factory or shop, you are passing up the opportunity of a lifetime to build a steady Extra Income by selling subscriptions to Popular Science Monthly to your fellow employees. For free kit and complete instructions write on a postcard to—Manager of Agents, Dept. A148, Popular Science Publishing Co., Inc., 353 4th Ave., New York 10, N. Y.

INTERESTED In Latin American & Foreign Employment? $1.00 brings Foreign Service Directory listing Exporters & Importers, Oil, Construction, Mining, Aviation Companies. Hot tips for application. Global Reports, Box 883-S, Hollywood 28, Calif.

ALASKA. The Last Frontier offers unlimited opportunities. $1 brings government map and Directory listing firms in Fishing, Construction, Mining, Aviation, Fish & Game rules, Homestead data. Alaska Opportunist, Box 883-S, Hollywood 28, Calif.

TYPISTS—Profitable business at home. Complete copyrighted information. 50c. Gaunt, 3521B Broadway, Chicago 13, Ill.

METALLIZE baby shoes and other nonmetallic articles. Fascinating work. Big profits. Shuplate, Box 1388, Lawton, Okla.

$5000 FROM half acre growing Ginseng, crop bought. Particulars 10c. Associated Growers, 1169 Corydon, Winnipeg, Canada.

DIRECTORY: Foreign Projects: $1.00. Foreign Service Institute, Box 3934, Miami 24, Florida.

33 BOOKS, PERIODICALS, ETC.

MAGAZINES (back dated)—foreign, domestic, arts, Books, booklets, subscriptions, pin-ups, etc. Catalog 10c. (refunded). Cicerone's, 863 First Ave., New York 17, New York.

USED Correspondence courses and books bought, sold, rented and exchanged. Catalog Free. Lee Mountain, Pisgah, Alabama.

"HOW To Drive an Automobile." New, Illustrated, $1. Szafarz, Box 705P, Pawtucket, R. I.

"ADULT Bookettes." 25c. Fifteen—$1.00! Free catalogs! Hirsch, Spring Valley 3, N. Y.

BOOKHUNTERS! All subjects. Send wants! Jaher Book Service, 620-K East 178 Street, New York 57.

"MAILORDER Booklet Guide." 2500 words. Dependable literature. 3c. Wayne Berger, Baltic, Ohio.

EASY profits taking magazine subscriptions, handling greeting cards. Full details free! Cassell Publishers, Westfield, N. J.

BACK issues magazines, reasonable. Reedmor, 240 East 9th, New York, N. Y.

BE a winner! Guaranteed tested method. $1.00. Personal lucky plastic key charm. $.50. Money order only. Collier, 108 Schooslide Ave., Los Angeles 22, Calif.

EXCITING and Strange books. Send 25c (coin) for catalog and Private collector list. Rare Book Co., 1219½ North La Brea Ave., Hollywood 38, California.

ADULT books—Unusual—Revealing—illustrated. Five, $1.00. Kogan, 1032-S, Church Annex, New York 8.

PSYCHIC Magazines American, English, Australian. Send 25c for 2 back issues Psychic Observer. List Free. Bobbitt, 1600 10th Ave. North, Dept. 39, Nashville 8, Tenn.

BACK-Date Magazines, Books. Specific issues; years. Arkell's, Tarzana 2, Calif.

"BORROW and Prosper," the book that tells you how! $1. H. L. Edsall, Box 115, Verona, N. J.

1948 CATALOG, wholesale directory. 10c. Latshaw Sales, Sunnyside-C, Indianapolis 44, Ind.

SELF-Hypnosis—Interested in subject, write for free details on amazing new book. House of Psyche, 542B—5th Ave., N. Y. C. 19.

SMART men read "Men Only". Britain's most stylish man-about-town magazine. Famous for its robust humour, beautiful art photographs and crisp wit. Articles and stories by Britain's brightest writers on sport, adventure, dogs, horses, clothes, food, drink, tobacco and the girl next door. Annual subscription (12 issues mailed from London) $4.00 to George Newnes Ltd., (MO. 4), 342 Madison Avenue, New York 17.

MAKE extra cash taking friends' magazine subscriptions. Confidential wholesale price list $12 free. General Circulation Co., Inc., 1311 Widener Bldg., Phila. 7, Pa.

"ALL in the name of God." Passing show of life in 1948. Send money order for $2.75. C. A. Gray, Inc., 418 Broad Street, Syracuse 10, N. Y.

35 MAGIC TRICKS, PUZZLES, ETC.

MAGICIANS', Gamblers' secrets exposed. Cards, Dice, Punchboards, Slot Machine. Catalog 10c. Book Co., Box 671, St. Louis 1, Mo.

WORLD'S largest professional magic shop, keeps you in touch with latest tricks. To receive mailings, send 50c for new catalog. Holden's, 220-P West 42nd St., N. Y.

PROFIT selling tricks and puzzles direct or mail. 20 samples postpaid $1.00. Theron Fox, 1296½ Yosemite, San Jose 11, Calif.

MAGICIANS' Headquarters — 400-Page Professional Catalogue, pocket, parlor, stage tricks. World's finest magic. Send $1.00 for Catalogue (refunded first $5.00 order). Kanter's, S-1311 Walnut, Philadelphia 7, Penna.

LEARN magic, Ventriloquism, Mind-reading. Write for particulars. Quackenbuch, Big Flats, N. Y.

HYPNOTISM! 25 Lesson Course, $1.00. Monarch, 38-S Jefferson, Auburn, New York.

200 ELECTRIC Stunts, 110 volts, $1.00. Cutting Sons, Campbell 47, Calif.

TRICKS & Jokes you've always wanted but never knew where to get. Write for Free illustrated price list. Western Latex Co., Room 1320S, 431 South Dearborn St., Chicago 5.

BE a Magician. Large professional magic catalog of latest tricks. 35c. Ireland, F-100 North Dearborn, Chicago.

FOUR Popular Card Tricks with catalog, 25c. Stivers, 40 Salem, Medford 55, Mass.

ASTOUNDING Phenomenon! Amazes, Confuses, Mystifies all. Magic Light Bulb, lights up in Hand, Mouth or ear, no wires. Professional Magicians secret trick. It's Easy with Special Bulb and Instructions complete Bulb with Big Catalog 400 other tricks $2.00. The Magician, 2463-D, Kensington Ave., Phila. 25, Pa.

500 TRICKS. Send only 10c for Douglas' famous 112-page Catalog 500 Tricks. New magic for amateur, professional. America's fastest service for 25 years. Douglas Magicland, Dept. 2, Dallas, Texas.

HYPNOTIZE at a glance, by phone—instantly! "Master Course in Hypnotism" reveals speedy stage methods, sensational secrets, amazing stunts. Photographically illustrated, complete—$2.00. Satisfaction guaranteed. No minors. Power Publishers, H4, 790 Broad St., Newark 2, N. J.

BE Popular! Earn Money! Have fun! Send 10c for giant catalogue amateur, professional magic. Newton Company, Dept. 20, Bonham, Texas.

VANISHING Quarter trick and catalog 25c. Sterling Magic Co., Royal Oak, Mich.

5c BRINGS Catalogue Magic-Jokers' Tricks! Postways, Box 5325-K, Philadelphia 42.

279 TRICKS and Stunts (instructions) to mystify-amaze friends. Plus New Magic catalog and Supplies for Miracle Poker Chip Trick. All 25c. Steiner's, 316-P East 61, New York, New York.

FREE trick with illustrated Magic Catalogue. 25c. Hall Magic, 345 John R, Detroit 26, Michigan.

36 GAMES, ENTERTAINMENT

HOME Model Slot Machines and Coin Operated Games. Write for catalog. Webb Distributing Co., Dept. P4. 6 South Kedzie Ave., Chicago 12. Ill.

37 COIN COLLECTING

GET profit and pleasure in collecting old coins. Send 10c for 56 page illustrated coin catalog. You'll be delighted with it. Send for it now. B. Max Mehl. 374 Mehl Bldg., Ft. Worth. Texas. Largest rare coin establishment in U. S. Established 48 years.

FREE! Foreign coin, banknote and Coin Collectors' Illustrated Catalog to approval service applicants. Send 3c postage. Tatham Coin Co., Springfield-D50. Mass.

COMMEMORATIVE $½ — Columbus, Washington, Cleveland, Stone Mountain, $1.50 ea. Illustrated Catalogue 25c. Norman Schultz, Salt Lake 9, Utah.

FREE—Coin. Banknote. lists. Reynolds Stamp-Coin Shop. Flint 3. Mich.

OLD Money Wanted. Will pay $100.00 for 1894 Dime. S. Mint. $50.00 for 1913 Liberty Head Nickel (not Buffalo). Big premiums paid for all rare coins. Send 4c for Large Coin Folder. May mean much profit to you. Numismatic Co., Dept. 30. Fort Worth. Texas.

U.S. coins lowest prices. Send stamp for lists. Hutchinson. 3463 I Street. Philadelphia 34. Penna.

3-LEGGED Buffalo Nickel $1.25. 20 Coins From 20 Countries $1.00. 4 Whitman Albums $1.00. Handbook 75c; 254 Page Guidebook $1.50. Our Large Retail Catalogue 15c. Beebee Coin Company. 1180 East 63rd. Chicago 37. Illinois.

35 WORLD Coins $1.00. Harry Elshols. Box 9014. Pittsburgh 24. Penna.

40 STAMP COLLECTING

DEALER'S Wholesale Catalog. Postage 3c. Frankaco, 5031 Quesnsbury, Baltimore, Maryland.

ZOWIE-E-E! A Barrel of Fun for only a Dime! 500 United States Stamps—Absolutely unpicked and unsorted. just as received from church missions. Many varieties. including large commemoratives. airmails. high denominations up to $5.00! Stampdom's biggest package of fun. and you might find something really valuable!! Price only 10c to serious approval service applicants. Money back if not delighted. Illustrated bargain lists with each order. Mystic Stamp Co., Dept. 55. Camden. New York.

WOW!! $10.00 Worth Of Fun—Only 10c! What a treasure hunt! Big package 500 Foreign Stamps from foreign missions, other sources. Includes Stamps from Africa. South America. Free French. Somali. Palestine. etc. Includes airmails. commemoratives and stamps worth up to 50c. This offer sent for 10c to Approval Applicants only. Jamestown Stamp Co., Dept. 5. Jamestown. N. Y.

200 DIFFERENT Stamps—cataloging up to 15c each—only 3c to approval applicants! Littleton Stamp Co., Littleton 47. N. H.

NICARAGUA "Tin Pan Alley" Diamond. Ecuador showing George Washington. and American Flag in natural colors. Fezzan. Trieste. "American Army" stamp First U.S. Commemorative. $100.00 Shanghai. Corsica. Anzac. Antique. others all 5c approvals. Capital Stamp Co., Dept. 10. Little Rock. Ark.

FREE! Crystal-Mount Sample. Harrisco. 204 Transit Bldg.. Boston. Mass.

FREE—Famous Americans set. plus Flag set. plus the National Parks set. plus the Presidential set to the $5. A total of 90 stamps absolutely free to customers for our unsurpassed United States or Foreign selection. Send 3c postage for 15 of the above mentioned stamps and full particulars. Triboro Stamp Company. 145 Nassau Street. Dept. 209. New York.

1946 SARAWAK "White Rajah" Commemorative. plus Eastern Rumelia. Italian East Africa. Cilicia. Southwest Africa. Kwangchowan. Everything 3c with approvals. Viking. 130-PP Clinton St., Brooklyn. N. Y.

CHOICE of 35c worth of Stamps from our first U. S. Selection Free to applicants enclosing 3c postage. Large Selection to choose from. Act now! S. D. Engel & Co.. 38 Park Row. New York.

"CONFEDERATE-States" twelve different unused 10c approval applicants only. "Stamps", Box Eighty-Seven. Albany 1. N.Y.

U. S. 797 SPA Sheet only 5c to applicants for U. S. approvals. M. Haycock. 333—86th St.. Brooklyn. N. Y.

BRITISH. Spanish. French Colonies. Vatican. Hitler heads. and airmail packet. free with approvals. Pan-American Stampco. Box 145. New York 33. N. Y.

WORLDWIDE different: 200—25c; 500—50c; 1000—$1.25; 2000—$3.25. Beacon Sales. Maynard 3. Mass.

FREE. Triangle. Roosevelt. Vatican Ethiopia. Hitler Heads. Request Approvals. Florida Stamp Company. Box 807. Miami 5. Fla.

$300 FACE-VALUE in Chinese stamps only 3c with approvals. Wonder Stamps. 3401-B. Council Bluffs. Iowa.

15.000 DIFFERENT stamps 2c each! In books of 100 to 1.000. Gordon Davison. Box 1019A. Manchester. N. H.

"HOW to Start a Mail-Order Stamp Business"—$1.00. Skol Stamp Co., Box 62. Canal St. Station. New York 13. N. Y.

31 DIFFERENT with George Washington Stamps. from Brazil and Ecuador; Pirate Island; Victory issue; Medical set; others—all 4c with approvals. Grayson Stamps. Sherman. Texas.

"SETS!" Liberia Triangle. Nicaragua Diamond. San Marino Airmail. 10c. Approvals. Box 1128. Miami Beach. Fla.

BRAZIL Diamond shaped set. 10c with approvals. Vargo Stamps. 6044 South Fairfield. Chicago 29. Illinois.

"GOYA NUDE" set complete 35c. Approvals. Royal Stamp Company. Tamaqua 2. Penna.

FREE! Complete Balkan aviation set with approvals. Beaman. Leeds 10. Ala.

FREE! Tiny Chinese "Midget" War set. Approvals. Seminole. Leeds 10. Ala.

FIRST day covers on approval. Bob Knobel. 1918 S.W. 12th Street. Miami 35. Florida.

FOR Better U. S. approvals write today —Reasonable—Box 488 A. Minneapolis.

FREE! Negro Triangle; Turks Islands "Cactus"; Dakar; Guinea; Palestine; "Fairy Tale." Pirate Chart. Map. Ship. Sea Lion and Snake stamps; French. British. Portuguese Colonies. etc. Free for 3c postage. Approvals. Potomac Stampco. Washington 10. D. C.

FIJI included! Stamp from 40 countries 10c. No approvals. Elzea. Bowling Green. Ohio.

OLD. scarce U. S. seconds on approval. Slightly defective. bargain prices. Hearnfeld. Clintonhill Station. Newark 8. N. J.

FREE! Mint! San Marino Airmails. U. S. and Foreign Approvals. Standard. Box 43. West Farms. New York 60. N. Y.

25 DIFFERENT Denmark sent to approval applicants enclosing 3 cents postage. G. D. Durden. Box 846. Orlando. Fla.

JUGOSLAVIAN catalogs 30c. 5c with approvals. International. 17 Stow Rd.. Mattapan. Mass.

GIVEN Free—Roosevelt-Churchill. Hitler-Mussolini with approvals. Imperial. Box 1491. Tampa. Florida.

PENNY Approval Bargains. Write Dept. PSM. 1267 Tutwiler. Memphis 7. Tenn.

UNITED STATES approvals complete coverage fine quality. attractive prices. Seminole Stamps. Box 1138-S. Coral Gables. Florida.

FREE. Irish commemorative collection. including Rebellion issue with approvals. Raymax. 123-X William St.. NYC 7.

300 DIFFERENT given free with approvals. Postage 3c. Windsor Stamps. 1435 E. 67th Place. Chicago 37.

VICTORY Packet Free—Includes stamps from Tanganyika—British Cayman Islands —Animal—Scarce Babyhead—Coronation— Early Victorian—Airmail—Map Stamps—Including big illustrated catalogue. Send 5c for postage. Gray Stamp Company. Dept. P. R. Toronto. Canada.

USED 1938 Presidentials 5c. 10c. 15c. 18c. 19c. 20c. 25c. 50c. $1. Given to approval applicants. R. B. Rossom. 218 West 59th St.. Chicago 21. Ill.

25 DIFFERENT stamps 10c. F. Tunis. Wakeman Ave.. Newark 4. New Jersey.

FINE Approvals. Fast. personal service. What countries do you prefer? I'll send their stamps. Milton Skinner. 438 Locust. Long Beach 12. Calif.

START your own stamp business. Write for free circular. Donald Shepard. Box 5139. Chicago.

21 AMERICAN Flags on one large stamp plus 5 handsome sets. With approvals 5c. Arthur Wirth. Norwichtown 2. Conn.

LATEST new issues on approval. Reasonably priced. adults only. Portnoy. 237 Metropolitan. Atlantic City. New Jersey.

TRADE your duplicate stamps the New way. Complete details and New Issue News Free. Stamp Trader. 12660 Laing. Detroit 24. Michigan.

POSITIVELY Greatest Free Offer—Rare Octagonal (eight sided) stamp. gorgeous diamond. giant triangle. also mammoth and midget stamps. total value $2.00. All Free to approval buyers. Plus Free. Scott's International $6.00 album and latest Stamp Catalogues. Odd Stamps. P. O. Box 510. Bell. California.

128-PAGE United States Catalog. 1.000 illustrations. 10c. Harris & Co., 204 Transit Bldg.. Boston.

FLAG Stamp Free With U.S. Approvals. E. Wenigman. 929 Oakdale. Chicago.

50 DIFFERENT United States 10c Price list free. Seidenberg. Cassopolis. Mich.

SPECIAL! Bicolor Vatican Set 3c. Catalogs 90c. Approvals. Rostamps. 1921B Schiller. Little Rock. Arkansas.

HANOVER Fair set. Tunisia Liberation Vichy Triangles and twenty others all mint including Airmails. 10c to serious approval applicants. Burmaster. Box 1910. Los Angeles 53. Calif.

SPANISH Air Set Free to Approval Applicants. Flamingo Stamp Company. Box 4038. Pinewood Station. Miami 38. Florida.

ROGUES Gallery Packet. Hitler-Mussolini. 30 others. 3c. Premium. Hartland 6. Me.

UNITED STATES Mint #409. #409. #797. Used #94. #157. #225. #613. Only 50c. Approvals accompany. Whiton-Stamps. Westport 1. Connecticut.

GIFT Packet with Introductory Approvals. Surf Stamp Co., Box 2296. Miami Beach. Fla.

FREE! Monthly illustrated price-list catalogue of attractive new issues and supplies. Shorewood Stamp Co., Box 1255. Milwaukee 1. Wisc.

WORLD'S Largest Stamp (7½ x 14 inches). A real curiosity! Retails for 50c. only 3c to approval applicants. Tatham Stamp Co., Springfield 50. Mass.

200 DIFFERENT. including Roosevelt triangle. 5c to approval applicants. S. Avalon Stamp Co., Springfield. Mass.

TRIANGLES! Diamonds! Octagons! Midgets! Giants! Roosevelts! Hitlers! U. S. $1.00-$5.00. Stamps! Stamp Magazine! Everything 10c with Approvals! Thrifty Stamps. Silver Spring. Maryland.

COLLECTORS in possession of valuable duplicates may exchange them through this club. Particulars for stamp. Box 17. McPherson. Branch. Michigan.

MIDGET "Upside Down" triangle. Flaming Torch stamp. bicolored pictorial Kenya. Uganda. and Tanganyika. Bolivia. birds and beasts. Central & South America and others! Packet given to sincere approval applicants sending 3c postage. M. Okin. 915 Bryant Ave., New York 59. N. Y.

FREE: twenty different foreign commemorative stamps with foreign approvals. Modern Stamp Service. Box 12A. Wakefield Station. N. Y.

BERLIN Bears. Complete set of eight and 100 different stamps only 10c to approval applicants. Reich Stamp Co., 4647 Kenmore. Chicago 40. Ill.

FIFTY Stamps from Fifty Different Countries 10c. Garrow. 84-G Montevista. Chula Vista. California.

ENORMOUS Bargains! 2000 Foreign stamps $1. 5000. $2; 2000 United States $1. 5000. $2. Order now. Standard Co., Atlantic Building. Washington A-4126. D. C.

MAGIC Bag: Delightfully different penny approvals. Resch, 3739 Wilton, Chicago.

A WORLD of Stamps for 10c!! To obtain 1000 new Customers for our approval Service—we offer this stupendous Bargain-Stamps from every part of the World, airmails, pictorials, commems, etc.—A Fine Lot of Stamps for only 10c—Send your dime with your request for our Bargain approvals now. Cosmopolitan Stamp Co., 1457 Broadway, N. Y. C. 18.

U. S. Price List (complete) free. Request catalog #22. Rumark Company, 116 Nassau St., New York 7, N. Y.

307 ALL Different 10c. You will find scores of new varieties here for your collection! Big and little stamps, bisected stamp, Commemoratives, triangles, high values! Bicolored Beauties! Strange countries! Every stamp is different. All for only 10c to approval applicants. Write today and receive special Ionian Island stamp extra. Garcelon Stamp Company, Box 418, Calias, Maine.

51 DIFFERENT Belgium; used, unused, pictorials, etc. Catalogs high. Only 5c if you request approvals. L. Frazer, Box 4600, Portland 2, Oregon.

BEST mixtures on the market! Full, beautiful sets, attractive singles! Better than approvals. $1.00, $2.00, $3.00. John H. Nabholtz, 6683 Lakewood, Dallas 14, Tex.

STAMP Buyers' Guide (Box 1649F, Oakland 4, California), plus 50 different Italy Stamps, for 10c.

HUGE Roosevelt, Bolivia Music Set. Free with Approvals. Stone Stamps, Box 604, Miami 34, Florida.

50 DIFFERENT Free to Approval Applicants. Buckeye Stamps, Urbana, Ohio.

42 HOBBIES, COLLECTIONS

INVENTING can be an interesting and profitable hobby. Write for complete particulars. Institute of American Inventors, Dept. 30-E, 2926-Eye St., N. W., Washington 6, D. C.

50 DIFFERENT army embroidered patches $1. Other bargains. Insignia Mart, 703B Broadway, New York 3, N. Y.

GIANT conch or helmet shell $1.00. Painted conch lamp $2.00. Southern Importers, Box 1685-S, Miami 35, Florida.

UNUSED Match Book Covers. 100 all different $1.00. Free catalog. Charles Edelman, 1311 P East 84, Cleveland 3, Ohio.

10 ANCIENT Arrowheads, $1.00. Peace Pipe, $5.00. List Free. Lear's, Kirby, Arkansas.

46 MINERALS & PRECIOUS STONES

ZIRCONS, loose. Pure white. Special 3 Zircons approximate total weights 3 kts. $6.00. We can supply Zircons in all sizes and mountings of all types. Send order or write for details today. B. Lowe, Holland Bldg., St. Louis, Mo. PS.

"GENUINE" deep red Arizona Rubies (Garnets). Send quarter for packet. Mineral Specimens Company, Box 2651, Phoenix, Arizona.

GEMSTONES, rough, polished. Crystallized specimens. Every variety, lowest prices. List free. Plummer's, 5068 Brighton, San Diego 7, California.

GEMS, precious and semi-precious, all genuine from world wide sources. Deal direct, no overhead, save money. Catalog 10c Hill Co., Route 7-K, Salem, Oregon.

ZIRCONS, Sapphires, Rubies, others. Best quality; lowest prices. Free catalogue. Imhusex, Box 232, White Plains, N. Y. Agents Wanted.

GEM Zircons. Ready-to-set. $2^3/_4$ carat, $3.85, 1 carat, $2.65. Don Huse, Armonk, N. Y.

VOLCANIC and odd rocks from the Colorado Rockies. Odd shapes and colors 2" to 4" diameter 6 for $1.00, 15 for $2.00, 50 for $5.00 and large assortment 125 for $10.00. Larger the assortment the more variety. Sent Post Paid. David Beck, P.O. Box 161, Cedaredge, Colo.

47 CAMERAS, PHOTO SUPPLIES

FREE 2x3 Color Slide and Fine Grain Negative! Send self addressed stamped envelope for samples and catalog. James J. Bradford, 1302 Broadway, Burbank, Calif.

FREE Bargain List. Cameras, Projectors, Equipment. Segmour's, P.O.B. 796, New York 1.

BASS says! At the sign of the old "Horse Trader," 38th year. Thousands of satisfied customers everywhere! Finest brands including Kodak, Bell & Howell, Argus, Zeiss, Leitz, etc. Satisfaction always guaranteed or your money back! Bass buys 'em, sells 'em, trades 'em. Write or wire. Bass Camera Company, Dept. AG, 179 W. Madison St., Chicago 2.

YOUR prized negatives make beautiful photo enlargements easily, economically with the new Precise Photo Enlarger, only $22.20 complete, nothing else to buy. Send postcard for details. Tam Products, CS-9, 3814 Wrightwood, Chicago 47.

CAMERA, precision made; takes those pictures you show and keep. Full color, black and white, day or nite. $2^1/_4$" x $3^1/_4$", synchronized flash attachment; famous Traveler 120, only $9.95 complete. Send postcard for details. Tam Products, SC 9, 3814 Wrightwood, Chicago 47.

PHOTOGRAPHY for pleasure or profit. Learn at home. Practical basic training. Long established school. Write for booklet. American School of Photography, 1315 Michigan, Dept. 1742, Chicago 5.

A.B.C., 563 W. 181 St., N.Y.C. 33. Buys German Cameras, Binoculars, Scientific Instruments.

K-21 AAF Aerial Combat Cameras, manufactured by Graflex; motor driven, with flexible shaft; 24 volt operation, including step-down transformer to 110 voltage; may be manually operated. Complete except for lens and filters. New; original government packaging; new low price, for a limited time only, $19.50. An Amazing value from Amazing Bachman's—Dept. PS, 27 Herman Street, Rochester 5, N. Y.

200X TELEPHOTO camera easily made. Trifling cost. Telephoto lens and instructions $3.00. Instructions alone 10c. Suffolk Science Service, Box 408, Manorville, N. Y.

48 PHOTO FINISHING

THREE prints each 8 exposure roll 40c. Two each 35c. One each 25c. Reprints 3c. Fred A. Eastman, Bode, Iowa.

NEW Process developing and printing. 8 exposure rolls 35c. Mayfair Photo Service, Box 261-A, Toledo, Ohio.

8 PRINTS all enlarged to nearly postcard size from your roll or negative 25c; 16—50c. (Trial offer) Willard Studios, Box 3535D, Cleveland, Ohio.

SENSATIONAL Introductory Offer! Send snapshot or negative, this ad and 10c. We'll send you a beautiful 7 x 5" enlargement! Or, Kodak roll developed and printed (with free coupon) only 25c; or 8 Giant prints from roll, 30c. Reprints from negatives—any quantity—regular size, 3c; Giant size 4c. Candid rolls—36 exp. 35mm developed, vaporated, enlarged to 3 x 4, $1.00. 18 exp. 50c. Free Mailers. Free Premium offers sent on request. American Studios, Dept. 365, LaCrosse, Wisconsin.

TRUE color saturated imbibition prints from 35 mm to 4x5 transparencies at sensational new low price. 8x10 prints, mounted: $8.25 and $2.75 each additional from same transparency. Cropped as desired. Martin Color Reproductions, 100 Lynmouth Road, Malverne, N. Y.

2 BEAUTIFUL Hi-Gloss prints each good negative and enlarging coupon with each 6 or 8 exposure roll developed 28c. Owlphoto Co., Weatherford, Oklahoma.

8 BEAUTIFUL Double Size pictures and roll developed 30c. 8 hour service. Free Mailers. Pacific Photo Service, Box 666, San Francisco, Calif.

ENLARGEMENTS 5x7 15c, 8x10 25c. Glossy or dull. Gorgeously oil colored 50c. Rolls developed and printed 25c. L & R, P. O. Box 1476, Milwaukee, Wisconsin.

51 MOTION PICTURES, SOUND EQUIPMENT

"BASS says! 38 years of leadership means satisfaction to you! Finest equipment, 8 and 16mm, sound cameras, sound projectors. Bass buys 'em, sells 'em, trades 'em. Satisfaction always guaranteed or your money back! Bass Camera Company, Dept. A, 179 W. Madison St., Chicago 2.

MOVIE Film Processing—Finest Automatic Machine Processing. 8mm, 16mm. 48 hour service. Also duplicating, editing, titling, other lab. services. Send for list of prices. Fotoshop Inc., Room 230, 18 E. 42nd Street, New York City 17.

LEARN movie projection, management. Free Catalog. Theatre School, Elmira, N.Y.

KODAK Super-X Movie Film at Give Away Prices! Gov't. Surplus but Good as Gold! Tested and fully guaranteed. 16mm 100' $2.95; 50' Magazine $2.50; 8 mm 25' Double 8 $1.65. Processing included. Stock Up Now! Fotoshop, Room 254 18 E. 42nd St., New York City 17.

MOVIE Film at Tremendous savings! Kodak Super X, Gov't. Stock. Tested. Guaranteed! 16mm 100 ft. $2.95; 50 ft. Magazine, $2.50; Double 8mm 25 ft. $1.65. Super XX. 50c add'l. each roll. Free Processing. Fast Service. Photo Surplus Sales, Box K-15, 12 Duane St., New York City.

ELECTRIC Movie Cameras, 16mm. Army GSAP original condition. Value $200. Complete with f/3.5 lens New $32.50. Used $19.50. Accessories available for home conversion. Free literature. Completely converted Lektro, 16mm, Ready-To-Operate $59.50 Guaranteed. Magazine film for same, $2.50, includes processing. Fotoshop, Room 206 18 E. 42nd St., New York City 17.

8-16MM. Silent-sound films. Complete rental library. All latest subjects. Free catalogue. (sample film 10c). Garden Film, 317 West 50th, New York 19.

HOLLYWOOD films. Color sample, $1.00 (refunded). Catalogs 10c (refunded). Stone, Lunenburg 10, Mass.

SOMETHING New in 2 x 2! 100 New original art slides, full frame, Ansco color, never before offered! Mounted slides! 10 for $4.50; 20 for $8.50; 30 for $12.50; 40 for $15.50. No C.O.D.'s. All orders shipped postpaid. Benefit Corporation, 3807 Q Benefit St., Baltimore 24, Md.

BENEFIT'S Strip-O-Slides, now available. Needed by every artist. 25 art studies in life-like color, on 35mm Film Strip complete with 25 readymounts. Only $2.95 postpaid. (Add 10c for first class mail!) Series 1, 2, 3, 4 now available. Extra special viewer for $1.50 when ordered with Strip-O-Slides. Benefit Corporation, 3807-H Benefit St., Baltimore 24, Md.

GUARANTEED Super X reversible panchromatic 16mm surplus film! 6-100 foot rolls ready for camera $8.10! Bulk, 600 feet, $5.00! Processing available. Filmcraft, 47th & Holly, Kansas City 2, Missouri.

SOUND features shipped, rental $3.95, 1,600' shorts, $2. Free catalog. National Cinema Service, 71 Dey Street, New York City.

ART Film and art subjects; Get them all from Benefit. Be first with the best. Our special bulletins inform you of all new subjects immediately on release. Write now for free catalogue of over 100 8mm and 16mm subjects now in stock. Illustrated folder of fifty glamorous poses by Bruno now available. Send for your free copy today. Benefit Corp., 3807 H Benefit St., Baltimore 24, Md.

UNUSUAL 8-16mm. film subjects. Art slides. Films exchanged. Big catalog with sample film, 25c; refunded first order. National Film Supply, Broadway Sta. (E), Toledo 9, Ohio.

FREE movie list. Superior Film Service, Box 713, Troy, N. Y.

BURLESQUE Movies—8-16MM. Rare variety subjects. Silent and sound. Illustrated "Close-up Review," 10c. Aero-Traders, PS7, Adams, Mass.

FILM Movetone is back. It's Weston 12 nonhalation. Free processing 100 ft. 16mm $3.25, 25 ft. double 8mm $1.50. Bulk film without processing 100 ft. 16mm $2.25, double 8mm $2.45. Free circular. Fromader Genera, Davenport 5, Iowa.

BRAND new 16mm sound projectors $129.50. Send 10c for 1948 photographic catalogue. Sterling's, 679 Northampton, Easton, Pennsylvania.

WESTON 50, 3—25' rolls 8mm $4.20, 4—50' rolls 16mm $5.25. Doan, 18099 Hamburg, Detroit 5, Michigan.

TITLE Making amateur's free booklet. Westwood Sales, 635 S. Victoria Street, San Francisco, Calif.

WE Buy, Sell, Rent, Exchange Home Movies. Details for dime. Midland, Box 429, Oak Park 3, Ill.

COMPARE Prices 100' 16mm $2.25, 25' 8mm $1.25, 16mm magazine $1.75. Titles 15c. Ambassador, 479-a-Quincy Street, Brooklyn 21, N. Y.

MOVIE film, machine processing service, bulk film, free literature. Atlantic Films, Reading, Pa.

8 16MM FILM Specialties. Catalog dime. Warrington Films, 1418 Knecht Ave., Halethorpe 27, Maryland.

GIRLS, beautiful girls new film. California vs. Florida Headline 16mm $5.00. 8mm $2.50. Catalogue dime. Bailey Films, Box 2528, Hollywood 28, California.

8mm SOUND projector for the price of a silent machine. Write Standard Sales, Box 7525, North Kansas City, Missouri.

75 BEAUTIFUL Kodachrome 8mm-16mm movie subjects. Glamour, travel national parks, novelty. Low prices. Descriptive brochure, 25c. World In Color Productions, Elmira, N. Y.

PROCESS own movie film. Free literature. Duro Products, 1519 N. Eggert, Buffalo 21, N. Y.

EXCLUSIVE Movies Glamour Films Projectors, Screens, Slides. Free Catalog. Home Pix, 1674 Broadway, New York 19.

AMAZING Films Not Available Elsewhere! Child Birth, Caesarean Delivery, Tumor Operation, and other technically precise surgical films shot by trained technicians in largest N. Y. hospitals. Also other most unusual films, slides, etc. Send 10c for complete illustrated catalog. Refund with first order. Benefit Corp., Dept. A19, 3807 Benefit St., Baltimore 24, Maryland.

ART model films 16mm rentals exclusively, adults list. Enclose stamp. Revere Films, Box 1051, Detroit 31, Mich.

PARTY films 8mm-16mm latest Hollywood productions. Send for free lists. Varieties. Dept. B, Box 8493, Cole Branch, Los Angeles 46, Calif.

FINEST Movie Screens. Inexpensive. Make them Yourself. Free Literature. Snow White Screens, Danville 2, Illinois.

FIGURE Studies in full color. 35mm film complete with readymounts, 25 in a set. 4 different sets, $2.95 per postpaid. For artists, art students, photographers. Graziano Sales, 47 First Ave., N. Y. C.

NEW-Spartus Press Flash Camera complete with 4 Wabash Flash Bulbs and 12 Rolls of 120 Ansco film, $14.10. Dan's Service, 411 Redgate Avenue-5, Norfolk 7, Va.

FREE Movie Catalog; sample films 10c. Goodwill Company, Jackson, Tennessee.

ART Films and Art Slides—Study the grace and charm of the feminine figure right in your own home. These art films catch the intimate beauty of the female form. For everyone who enjoys true beauty and for artists and art students who wish to capture the lovely, natural rhythms of movement,—there are hundreds of different films. Write for complete listing. Specify 8 or 16mm. Camera Corner, Box B., 391 Bridge Street, Brooklyn, N. Y.

ARTIST'S Models — 16mm $7.35 — 8mm $3.95. Catalogue—Century, Box 1481-EA, Colorado Springs.

52 MUSIC, MUSICAL INSTRUMENTS

SWISS Musical Units $3.00. Music Boxes, Albums. 131 West 42nd, New York 18.

VOICE! Subconscious! Effortless! Control! Psychology! Mind Power! $1.65. Mr. Cor, 902 No. Jersey Ave., Norwalk, Calif.

SHEET Music Bargain 20 Songs $1.00. Art Music, 1658 Broadway, N.Y.C. 19.

DIAL-A-CHORD, world's quickest self-teaching piano sensation $3.85. Boogie any song with Boogie Piano key-board slide $1.00. Nelson Studios, 102-9304 Edmunds, Cleveland 6, Ohio.

SWISS Music Movements Assorted Tunes $1.90 Direct From Manufacturers Agent. Helax Company, 233 West 72 Street, New York.

53 SONG WRITERS

POEMS Wanted to be set to music. Free examination. Send poems, McNeil, Master of Music, 510-PS, S. Alexandria, Los Angeles, California.

SONGWRITERS, Songs Published Monthly. Advance Royalty. Send your songs or poems today for our exciting offer. Hollywood Tunesmiths, Dept. 10F-C, 1537 N. Vine, Hollywood 28, Calif.

$1,200.00 PAID Yearly to new songwriters. Opportunity for publication and advance royalty. No charge for melodies. Records, lead sheets furnished. Send song material now for free examination. Get details. Cinema Song Company, Dept. B-61 Beverly Hills, California.

POEMS wanted for musical setting. Send poems for Free examination. Hamann Service, 626 Manhattan Building, Milwaukee, Wisconsin.

SONGWRITERS: Send Poems for Free Examination and Outstanding offer. United Music, 116, Salem, Indiana.

POEMS Wanted For Musical Setting. Send poem for free examination. Five Star Music Masters, 646 Beacon Bldg., Boston.

SONGWRITERS—Protect your songs. Get the facts first. Free booklet, attractive offer. Song Service, 331-J West 46th, N. Y.

SONG Poems set to music. Arranged & Recorded. Send poem for immediate consideration. Clover Recording Service, 851 Tularosa Dr., Los Angeles 26, Calif.

SONGWRITERS' Attention! The amazing demand for phonograph records presents an opportunity you cannot ignore. Accelerated by Juke boxes, records have developed many hits for new writers. Our hit composers will collaborate with poem writers on percentage basis. This month, Recola Recording Company, Hollywood 28, Calif.

HONEST outstanding music writing offer. Len-Tex Studios, Leonard 3, Texas.

SONG-Poems, titles wanted. Outstanding proposition. Special Service (P), 2115 Kenilworth Ave., Berwyn, Ill.

VALUABLE! Names—addresses—Songwriters—details—Popular, Box 927, Atlanta, Georgia.

54 RADIOS, SUPPLIES & EQUIPMENT

MAKE Simple, Tubeless, Batteryless, Distance-Getting Crystal Radios. Crystal and illustrated instructions 25c postpaid. Allen, 427-S, Clinton, Mo.

FIX any radio. Amazing new instrument locates radio troubles double quick. Simple instructions show you how. Thousands in use. Write today for 24 page booklet "The Inside Story." Peller Engineering Co., 945 George St., Dept. PS, Chicago 5, Illinois.

FREE radio and television catalog! Money saving prices on radios, hard-to-get-parts, record changers, wire and disc recorders, amplifier systems, tubes, books, amateur and test equipment. Write today! Radionic Equipment Co., Dept. 159, 170 Nassau Street, New York 7, N. Y.

"ALL about Headphones," latest complete repair Handbook, including "Radio-builder"—25c. Laboratories, Eye-t, San Carlos, California.

MINIATURE Tubes, parts, kits. List free. Communications, Inc., 110 University, Seattle 1, Wash.

MAKE Boosters for Crystal Radios. Free instructions. Radio Leader, LaVerne 6, California.

56 BUSINESS OPPORTUNITIES

$25 WEEKLY working two hours daily. No canvassing. No Manufacturing. Lycke, Box 2471, Cleveland 12, Ohio.

RECAST old batteries into new. Latest achievements, Battery Laboratories, Minneapolis.

SPECIALTY Manufacturing, the big money business that can be operated anywhere, start on a very small capital; we supply dependable formulas and complete instructions; get interesting Free booklet, "Money-making Opportunities in Specialty Manufacturing." Howard Robinson, Ph. G., 1300-B S. Ohio St., Sedalia, Mo.

137 PLANS to make money local, mail order. Particulars free. Elite Co., 220-A Grand St., N. Y.

GOOD Paying Business Silvering mirrors, plating autoparts, reflectors, bicycles, bathroom fixtures, etc., by late methods. No tanks or shop required, outfit furnished. Free Booklet. Gunmetal Co., Ave. E, Decatur, Illinois.

TRAVEL anywhere anytime. Earn $85.00 week up. Be your own boss. No experience necessary. Less than $5.00 investment required. Literature free. Traveler, La Grange 2, Indiana.

OPERATE profitable mail order business. Write Walter Service, 4159-B East 112th, Cleveland 5, Ohio.

NO selling, operate vendors, amazing profits, details Free. Factory Silver-King Corp., 622 Diversey, Chicago, Ill.

A FACTORY in your home garage! Mfg. and sales rights, mechanics' waterless hand cleaner. $500-$800 monthly. No special equipment necessary. Formula free. Western Aircraft Mfg., Dept. G, Los Angeles 6, Calif.

VENDING Machines earn big money! An investment as low as $10.50 will start you in this fascinating, profitable business that can lead you to the road of success and independence. Routes can be established and operated in either full or spare time with no experience needed. Write for full details and our free catalog illustrating our nut, candy, gum and stamp vendors; also slot machines, amusement games, etc. Parkway Machine Corporation, 623 W. North Avenue, Dept. 9, Baltimore 17, Maryland.

ENVELOPES addressed accurately, reasonably. Fast Service. We have capable addressers in your city. Glenway System, 5713-Z Euclid, Cleveland 3, Ohio.

MAKE money sharpening saws at home on electric machine. No experience necessary. Hardware dealers act as your agents to secure work. Send for Free Book "Independence After 40" shows complete plan for starting in spare time. Foley Mfg. Co., 48 Foley Bldg., Minneapolis 18, Minn.

HOME Business making statuettes, plaques, artificial marble flooring, rubber molds, metallizing baby shoes. Amazing profits. Folder free. Creative, 236-M, Winnetka, Illinois.

MAKE $5,000 or more a year in advertising. Be your own boss. No experience necessary. Learn how. Write N.A. Advertising, La Grange 6, Indiana.

BIG Bargains for big profits. Over 100 sensational wholesale values. Men's used suits $2.00, pants 35c, topcoats $1.25, overcoats $2.00, shoes 20c. Experience unnecessary. Free catalog. Superior, 1250-B Jefferson, Chicago 7.

POPCORN Machines, Potato Chip outfits. Long Eakins Co., 4863 Hi St., Springfield, Ohio.

OPERATE Mail Order Business. Splendid opportunity. Write A. C. R., Box 728, Dover, Del.

NEW method of casting metal toys and novelties opens opportunity for full or spare time business and profits. Latest 1948 scale model autos, original ashtrays, savings banks, water pistols, etc. easily cast with bronze moulds. Big wholesale and chain store Xmas orders now being placed keep manufacturers busy. No experience or special place necessary. Write for details and illustrations of patterns needed. Metal Cast Products Co., Dept. E, 1696 Boston Road, New York 60, N. Y.

$10.00-$20.00 WEEKLY, spare time. No canvassing. Free literature. Teepee Co., Cleveland 3, Ohio.

FREE Electroplating Booklet. Money Making Plans. Send postcard for your copy. Highly Paid, Interesting. Uncrowded field. G. Hyde, 432 "F" Street, San Diego, California.

SELL photographic supplies in big demand! Nationally-advertised Cameras, Projectors, Darkroom needs, Accessories. Tremendous sales potential, big profits. Start small capital. Rush for details, prices, territory. Peace Products Co., Dept. 24-L, 152 West 42nd St., N.Y.C.

MACHINES to vend gum, nuts, or candy. $12.50 complete. Al Hoff, 1920 Rose, Baltimore 13, Md.

TRADE magazines help you get ahead. Latest copies every trade, business or interest. Free price-list. Commercial Engraving Publishing Co., 348 North Ritter, Indianapolis 11, Indiana.

START Sewing Machine business by electrifying and converting to portables. Free details. Pasaak, Dept. PS, Pauling Ave., Tappan, N. Y.

ANGORAS. Giant Chinchillas, white giants—World's most profitable rabbits. Finest pedigreed, heavy-producing, prize-winners. Literature free. Grinsteads, Edwardsville, Illinois.

PLASTIC French Enamel Jewelry. Complete illustrated manufacturing course $2.00. Atlier Company, 29-60 29th, Long Island City 5, New York.

LEARN Piano Tuning. Repairing, at home. Tremendous field! Piano parts, tools furnished. Established 1935. Empire School of Piano Tuning, 606-A East University Ave., Champaign, Ill.

BRONZING baby shoes is big business, start your own business for $3.95, all materials furnished. Metalsealed, Box 2095, Wichita, Kansas.

OWN Mirror Shop. Resilver Mirrors, Glass Sign Making, Electroplating. Supply Prices. John Sprinkle, V90, Marion, Ind.

USE your home as magazine subscription station. Represent all magazines. Liberal Commissions—we supply everything. Big Christmas business ahead. Catalog, full details, free. McGregor Magazine Agency, Dept. 23, Mount Morris, Illinois.

START Mailorder Bookshop—Everything furnished. 25c brings booklet, samples, exciting ideas. General Publications, Ossining 1, New York.

SELL Luxury perfumes for profits and repeats. Generous samples $1.00, deductible first order. Edward Lawson, 9-21 Joiner St., St. Augustine, Florida.

METAL, Onyx, Plastic mountings for bronzed baby shoes wholesale. 20 styles. Hardening solution. Metallurgists, Box 2095, Wichita, Kansas.

MAKE strange, durable plastic 1c pound. Makes charming walls, floors, roofs, chests. 101 uses. Build better—far less. Bays Laboratory, Oklahoma City 9.

LIQUID Marble—make in any color. Soundproof plastic flooring. Flexible molds. Cast novelties, plaques, statuary. Big Money—your own business. Catalog free. Write—Bing Products, 88-B9A Broad Street, Boston 10, Mass.

GET it for them wholesale. Be community buyer nationally advertised utility merchandise, radios, appliances, etc. Savings to 40%. Start spare, full time. This pleasant easy work can earn $5,000 year. Free information. Cox, 12 Foss, Saugus 9, Massachusetts.

START profitable home or sideline business, attractive and durable. Signs for churches, schools, stores and shops. Send $1.00 for kit, sells for $2.00. We furnish everything. No equipment or materials to buy. WWSS, Fishersville, Va.

IF you work in a factory or shop, you are passing up the opportunity of a lifetime to build a steady Extra Income by selling subscriptions to Popular Science Monthly to your fellow employees. For free kit and complete instructions write on a postcard to—Manager of Agents, Dept. A148, Popular Science Publishing Co., Inc., 353 4th Ave., New York 10, N. Y.

COLORGLAZED Concrete Pottery made without molds. Patented method. Cemetery products, novelties, tiles. Basement leak-sealing. Money-making projects. Booklet, details free. Men only. National Potteries, Grand Rapids, Minnesota.

MAKE Rubber stamps, metalize baby shoes, silver mirrors. Make plaster Novelties. Catalogue of "20 Ideas" Free. Universal, Box 1076-B, Peoria, Ill.

MAKE money making new greaseless doughnuts at home on electric machine. Wholesale to grocers, drug stores, cafes, hamburger shops. Send for free recipes and plans. S. Ray Company, 3605 South 15 Ave., Minneapolis 7, Minnesota.

OWN-operate Cigarette Vending Machines in hotels, taverns, garages, etc. 6-column machines, price $59.50 each. 9-column machines, price $90.00 each. Peanut and Ball Gum Machines, $13.95 each. Immediate delivery. Write for free circulars. Cameo Vending, 432 West 42nd St., New York.

GOODYEAR—Has 75% solids-Natural Malaya rubber for molds. Send $1.00 for trial. Write for full particulars. Goodyear, Main St., Lake Geneva, Wis.

DOLL Hospital Instruction. Very profitable. Information. Box 755, Southkent Branch, Grand Rapids, Michigan.

1948 CARD Guide. Sales Plans. Better, quicker, cheaper results. Small capital. Guide $1. Information stamp. Matsonian, No. Grafton, Mass.

LIQUID rubber make flexible molds. Free sample. Chaney, 1130 E. 16th St., Jacksonville 6, Fla.

MAKE Money at Home Like I Do! Write immediately. Duffy, Covington 5, Ky.

1000% PROFIT selling Snake Orchids. Devour live insects. Enterprises, Toronto 12, Canada.

MAIL order offers increased income, independence, unlimited possibilities. Free literature. Manhattan House, 1268 Lexington, New York 16.

CASH For your idea. 280 manufacturers need inventions, patented or unpatented. List free. Invention Bureau, 206-S Clinton, Oak Park, Illinois.

BUILD to financial independence. Office supplies sold by mail brings repeat profits. Glenn Snyder, 5-F Spring, Beachwood, New Jersey.

NATURAL molding latex. Extra thick. Free Sample. W. Wooley, 115-B Donald, Peoria, Illinois.

HOW and where to obtain capital. Particulars free. Star Service, Wapakoneta, Ohio.

"FIX Cracked Batteries"! Easy! Big profits! Cement $1.00 can! Free details! Stevens, Grand Junction 1, Colorado.

QUICK Money! "Repairing Car Batteries." At home! Easy too! Write, Batteryman, Grand Junction 1, Colorado.

MAKE Extra Money—New Simplified Silk Screen Process. Send $1.00. Adver-Graphic, 251 William St., N.Y.C.

AGENT or exclusive distributor for cigarette lighter mfg. MacGregor, Tahoe Valley 15, Calif.

BIG Money—Spare or Full Time in your own home. No selling! Spray New Miracle Finishes, Plush and Suede on signs, radios, autos, figurenes, lamps, toys, etc. Our business is booming—new Easy Flok-Kraft method. Material costs few pennies, you get dollars. Free samples—complete powerful money making plan—Write Now! Free! Coast Industries, 1511 W. Manchester, L. A. 44.

YOU Make Them, We Sell Them! New liquid plastic makes many items! Terrific demand! Earn minimum of $50 per week at home. No experience or machinery required. We supply raw materials and instruction. Write Travaco Laboratories, P. O. Box 1883, Boston 5, Mass.

SENSIBLE, proven successful mail order way. Write American Letter, New Market 1, New Jersey.

METALLIZE Baby Shoes. Excellent profits. New system assures success. Free details. Treasures Forever, 69-B Henry Ave., Lynn, Mass.

WOULD you pay 3%—first $350 made? Color-illustrated book "505 Odd, Successful Enterprises" free! Some offer occasional "day off." Work home. Expect something odd! Pacific, Oceanside, Calif.

EXTRA dollars or a good living with your typewriter. New, exclusive opportunity. Never before offered. Get details now. Schroder, 221 Bush, Covington 3, Ky.

ALL kinds American, Swiss watches, new and used; retail $3.65—$345.00; profit 33⅓% up; show our catalogue, get orders. Brookings, B-CJ1975, Little Rock, Ark.

BABY Shoes preserved. Formulas, Instructions $1.00. Supplies & Bases, Novelty Bronzing. Box 56, Hyde Park 35, Mass.

GOLDEN Opportunity. "How to Establish and Operate A Successful Mail Order Business." Free information. Palmer Publications, 4219-D Southwest Marigold, Portland 1, Oregon.

BRONZED Baby shoe mountings and supplies. All metal bronze bookends, picture frames, ashtrays, etc. Onyx ashtrays, desk sets, plaques. Hardening solution. 30-amp plating rectifiers with powerstat control, $85.00. Geared motors for agitation $20.00. Lead lined tanks. Write for list. Hollywood Bronz Supply, Dept. S, 1770 N. Vermont, Hollywood 27, Calif.

INCOME from local information. No selling. Neher Company, LaVerne 6, Calif.

I MAKE big money in the mail-order business. You can do the same at home with copyrighted system. Write me, I'll tell you how. F. Little, RD # 1, Glenshaw, Pa.

SELL!! Balloons, Combs, Specialty Merchandise. Carleton House Distributors, Texas City, Texas.

RUBBER: White liquid rubber! America's finest flexible molding rubber! New! Extra heavy viscosity! Quick drying! Ideal for home, classroom, or industry. Only $7.95 per gallon, $2.95 per quart, and $1.00 per half-pint sample. Parcel post prepaid! Plastercraft Supply Company, 3051 St. Clair Ave., Cleveland 14, Ohio.

MAILING postcards selling repeat merchandise is profitable. Everything supplied. Details free. Gordon Publishers, Box 23, Pawtucket, R. I.

GET Hundreds Money Making Deals, business ideas, plans and manufacturing. Amazing folio free. Austin Mail Service, 5538 Lexington, Chicago, Ill.

SELL quality paints for established manufacturer. Exclusive territories, good year-round earnings, factory cooperation. No capital or experience needed. Write Standard Industrial Products, Inc., Dept. PS-1, Evansville 4, Indiana.

ELECTROPLATE on leather, plastics or metal. Instructions $1.50. Four ampere plating unit with instructions $19.95. Eight ampere unit $29.95. Kissel Electric Products, 431 Sherman, Galion, Ohio.

REAL money making opportunity making Interlocking Concrete building blocks. Rex Products Co., Dept. 21, Piqua, Ohio.

$46 FROM Square Foot Plywood; Jigsaw necessary. Write; Woodart, Bridgewater, Massachusetts.

FREE Folio—400 Money Making deals. Business plans, Schemes, Formulas. Formico Prod., Box 572, Dayton, Ohio.

MOLD-Makers. Air-Cure concentrated latex. Lowest prices. Major Chemical Co., 131 Inman Street, Cambridge, Mass.

400 MONEY Making Deals, Formulas, Mfg. secrets, Tips. Folio Free. Formico-NA, Box 572, Dayton, Ohio.

CONTEMPLATING Mail Order? One of the proven secrets to mail order success is confidence. This is gained by operating from your own office, and not just an ordinary room or box number, or remote address. If you have something to sell and want quick results, we offer you the use of our cooperative office, as your own, for as little as $12.00 yearly. Free details. Cooperative Office Service, 126 Lexington Ave., N. Y. 16.

A JOB for you and a Home in "Sunny California." Facts, Figures, and Information you can depend on $1.00. Pomeroy Service, 11926-PS Wilshire, Los Angeles 25, California.

FISHWORMS. Big demand. Easy raise, sell, hundreds, millions. Instructions 50c. Charles, 12-ES, Norwood, Ohio.

CONQUER Your Struggles, with Master Formula to Riches. Endless chances around you for new business and plenty money. Write: Theocrucian Fellowship, Box 9609-4, Hollywood 27, California.

WHOLESALE Men's Hygienic Supplies! 48 Samples, $3.00. Acme Sales, Covington 7, Virginia.

RARE Opportunity For man to own merchandising service business. Thick market. Repeat business year around. Large earnings. Protected territory. Employ others. $1400. for merchandise and equipment. Write Hinson & Company, Richmond, Ind.

SELL Electrical Appliances. Big Profits. Price List Free. Belmont Appliances, 202 Hinsdale St., Brooklyn.

250,000 ARTICLES Wholesale. Directory 10c. Publishers, Box 16-A9, Laverne (1), Oklahoma.

BABY Shoe Metallizing Business.—Get into this million dollar business today! This is not a novelty,—steady, permanent, dependable business assured. Large profits, low investment. Our instruction book is photographic, teaches you by "seeing". Actual photographs taken in our plant, plus detailed instructions, take you step by step to success. Proven business getting plans, free consultant service included. Complete process $12.00. Money back guarantee. Write for our information circular, it's free! Bronze Art Metal Co., 1329 Milton, Pittsburgh 18, Pa.

PERFUME—Make it Yourself. Profitable spare time home business for men and women. Free Information tells how. Write "International", 6347 Parnell-S-27, Chicago 21, Illinois.

MILLION Dollar Flight Airplanes. Fly Outdoor, Indoor. Sample 25c. Dozen $2.00. Alexander F. Kolinski, 759 South 25th, Milwaukee 4, Wis.

RESEARCH reveals nine outstanding money-making opportunities of today. Tested, proved successful. Very small capital, quick returns, no selling. Available nowhere else. Kays, 324 N. Centre, Cumberland, Md.

$3.41 PROFIT per hour interest you? Easy, amazing process velvetizes interiors, signs, novelties, radios, lamps, etc., at low cost. Free sample. V-Sparks, 1145 Queen Anne, Los Angeles 6.

HOME business. Spin angora wool. House of Angora, Springfield, Illinois.

57 MONEY MAKING OPPORTUNITIES

DETECTIVES Earn Big Money. Experience unnecessary. Particulars free. Wagoner, P-125, West 86th, N. Y., N. Y.

START your own business! Big money manufacturing novelties, plaques, statuary. Free catalog. Write Bing Products, 68-B9B Broad Street, Boston 10, Mass.

"WHOLESALE" catalog. (Illustrated—10c) Bargains galore. Stafford. Box 5211-PS. Indianapolis 1. Indiana.

21 MONEYMAKING candy apple, popcorn formulas. Send $1.00 M. O. We can supply equipment for starting very profitable popcorn, candy floss business at little cost. Concession Supply, Dept. B, Sta. "B." Toledo, Ohio.

$12.00 PROFIT on 25c investment. Free folder. Suproco. Ogema 7, Wis.

INCREASE Your Earnings: Local Business Opportunities; Mail Order Information; Wholesale Supply Sources Valuable Money-Making Tips; Information. Free details. Rush name. Wilkin Company, Hillsboro 2, Ohio.

EARN $25 distributing 50 boxes of Greeting Cards. Over 20 different top quality assortments for Xmas, Birthday plus deluxe boxed stationery. Also make extra money taking magazine subscriptions. Details free! Cassell Co., 11-A Elm St., Westfield, New Jersey.

WIN contest money. General Contest Magazine gives hundreds of tips. Lists current contests and rules. Sample 25c. General Contests, 1609-A East 5th, Duluth, Minn.

METALLIZE baby shoes. Further information 3c stamp. Metal Crafts, Box 125-R5, Tampa 4, Florida.

SHINGLERS. Roofers earn big money lifetime. Start neighborhood business. Complete illustrated instructions. Money back guarantee. Cedar shingling $1.00. Asphalt shingling $1.00—both $1.75. Shingler. Box 88C. Penticton, Canada.

SCHOOL Seniors—Sell classmates America's most beautiful Graduation Name Cards. Largest Selection. 40% commission. Outsells all others. Free sample kit. Printcraft, Dept. P, 1425 E. Elm St., Scranton 5, Pa.

IF you work in a factory or shop, you are passing up the opportunity of a lifetime to build a steady Extra Income by selling subscriptions to Popular Science Monthly to your fellow employees. For free kit and complete instructions write on a postcard to—Manager of Agents, Dept. A148, Popular Science Publishing Co., Inc., 353 4th Ave., New York 10, N. Y.

FREE Literature describing many money making plans. Jenkins, Atmore, Ala.

MONEY Making offers details free. J. G. Schroeder, Box 504-S Anaheim, Calif.

ANYONE can make $247.50 from war material costing $1.50! Actual manufacturers show you how. Amazing proofs free. Rolls Enterprises, 115A West Sixteenth, N. Y. 11.

"WESTERN Advertiser" offers many worthwhile moneymaking opportunities. Sample copy Free! Harold E. Edlund, 577 Kensington, Los Angeles 26, California.

CARS . . . Cash . . . Homes . . . Free to lucky contest winners! Win your share with our contest aids. $1.00 brings Prize Contests Bulletin, Winning answers, entry blanks . . . Literature free. Personal Contest Club, Station "P," Dept. 12-P, Brooklyn 12, New York.

EARN Up to $2,000 year, inventing simple items. Special cash markets. Hendrickson, Argyle 8, Wisconsin.

EARN Money Evenings, copying and duplicating comic cartoons for advertisers. Adservice, Argyle 3, Wisconsin.

ENJOY life. Learn Waterproofing Business. Work anywhere. Others making thousands. Proof free. Bryan, Box 702, Cincinnati 1, Ohio.

SELL Watches, booklet free. Jewelbox, S-1455 Broadway, New York City.

WOULD You pay 3%—first $350 made? Color-illustrated book "505 Odd, Successful Enterprises" free. Expect something odd! Pacific, Oceanside, California.

PRIZE Contest Fans Reap Rich Rewards. Enclose 3c stamp. National Contest Bulletin, Box 2685-S, Miami 31, Fla.

A $100 a month hobby at home! No soliciting, no mail order, no meeting people. Easy, enjoyable pastime. Details, 25c (Refundable.) Laura Dickson, 1006-PS Elizabeth St., Anderson, S. C.

MERCHANT seamen earn big pay. Complete information how these jobs are secured $1.00. O. Coffee, Box 844, Sta. H, Los Angeles.

58 FORMULAS, PLANS, ETC.

OPPORTUNITIES! Catalog describing 300 Helpful Formula, Money-Making Books. Air-mailed throughout world for stamps. Adams-Brown, Boston 67, Mass.

FORMULAS—All kinds. Latest products. Literature free. Kemico, Park Ridge 15, Illinois.

10,000 FORMULAS and trade secrets. Free literature. Stillman, 555 Kingston Ave., Brooklyn 3, N. Y.

CONCENTRATED vegetables. Highest grade, raw, dehydrated, in tablet and powder form. No drugs. Write today for free circular. Kiro Concentrated Foods, Tama, Iowa.

COMPLETE information, rocket design and fuels $1.00. Higgins, 727 N. Ivy, Arlington, Va.

LABORATORY tested formulas. Lists free. Pont, Box 635-PS, Terre Haute, Ind.

59 PLASTICS

PLASTIC—Sheets, Rods, Tubes, etc. Free List. Plastic Supply Co., 2618 St. Louis Avenue, St. Louis 6, Mo.

SEPTEMBER Special. Supply kit including powdered and liquid dyes, Luminous powder and cement. $1.75 Postpaid. Lucite, plexiglas, sheets, rod, tubes, findings. Free catalogue. Craft Plastics, Somerville 2, New Jersey.

LUCITE Plexiglas. Any size sheets. Cost square foot (12" x 12") 1/16" $.96; ⅛" $1.25; 3/16" $1.52; ¼" $1.80; 5/16" $2.23. Include 10% postage. Almac Plastics, 1150 Broadway, New York 1, N. Y.

INTERNAL Carved swans, bluebirds, goldfish, butterflies, etc., pins, $1.50. Rose or Daisy costume jewelry sets, $1.50 less findings. Also gifts and novelties. Crystal Floral Novelty Co., Somerville, New Jersey.

PLASTICS—dyes, finding, shells, craft supplies. Catalog, fabricating manual, 10c. Lucite sample, 35c. Gem-O'-Lite, Box 686G, North Hollywood, Calif.

CEMENTS, Dyes for all Plastics. Free Catalog. Handbook of Plastic Cementing and Dyeing $1.00. Crescent Engineering, 1130 Fairoaks, South Pasadena, Calif.

LUCITE Plexiglas. Any article you make polishes itself crystal clear by merely dipping in "Liquid Shine" for thirty seconds. Quart $2.95, gallon $8.75 postpaid. Send check or money order. Instructions free. Acwood Products Co., Box 263, Long Island City #1, N. Y.

60 CHEMICALS AND APPARATUS

LEARN Chemistry at home, from the House of Winn. Home of Supplies for student Chemists. New idea chemical and apparatus outfits for Home Experimenting. Photographic Scales. Semi-Professional Microscopes and accessories. Send 15c for retail catalogue. Established 1931. John H. Winn, 124B West 23rd Street, New York 11, N. Y.

INTERESTING Catalogue Rare Elements, Chemicals small quantities, processes. Dime refunded first order. Vicar Laboratories. Established 1916. Guerneville, California.

NEW Laboratory supply catalog of chemicals and apparatus. Contains many thousands of items with illustrations. Send 25c. Standard Science Supply Company, 1232 N. Paulina St., Chicago 22, Illinois.

HANDBOOK for Chemical Experimenters. Hundreds of Experiments; Illustrated. 50c. Experiment Booklet, 15c. Supply Catalog, 5c. Reading Scientific Co., Reading, Penna.

FREE catalog: Chemistry, mineralogy, biology, physics. Tracey Laboratories, Evanston, Illinois.

TERRIFIC bargains in chemical laboratory apparatus—Catalogue 10c. Ross, Section B, 68 West Broadway, New York, N. Y.

EDISON'S Home Laboratory made him famous. Start yours today. Catalogue Chemicals and Apparatus 15c. Microscopic Stain Catalogue 20c. Both for 25c. National Scientific Company, 2204 North Ave., Chicago 47, Ill.

EXPERT chemical information about your problem. Send with $1.50 to Osterberg Laboratories, 2101 Girard So., Minneapolis 5, Minnesota.

CHEMICALS and apparatus for industrial, analytical, and private laboratories. Catalog 10c. Dept. M-26, Biological Supply Co., 1176 Mt. Hope Ave., Rochester 7, N. Y.

CHEMICALS, ounce quantities, apparatus, catalog 10c. Fleischer's Laboratories, Everett 49, Mass.

61 HELP WANTED

BOYS wanted. Over $50 week! Sell name plates for front doors. Write Dept. S, National, 214 Summer, Boston, Mass.

EARN Up to $520 Month part or full time keeping books for small firms. Simplified System. Write Tax-Saver System, Dept. H, Fort Worth, Texas.

IF you work in a factory or shop, you are passing up the opportunity of a lifetime to build a steady Extra Income by selling subscriptions to Popular Science Monthly to your fellow employees. For free kit and complete instructions write on a postcard to—Manager of Agents, Dept. A148, Popular Science Publishing Co., Inc., 353 4th Ave., New York 10, N. Y.

BOYS! Earn big money and bonuses easy selling brass name plates for neighbor's doors. Write Hubstamp, 357-B Congress, Boston, Mass.

ABRIDGED directory; 160 companies with foreign projects or interests; $1.00 cash (C.O.D. $1.27). Foreign Service Institute, Box 3980, Miami 24, Fla.

62 AGENTS WANTED

GOOD Paying Business Silvering mirrors, plating autoparts, reflectors, bicycles, bathroom fixtures, etc., by late method. No tanks or shop required, outfit furnished. Free Booklet. Gunmetal Co., Ave. G, Decatur, Illinois.

EXCELLENT Sideline for printing and advertising salesmen. Decalcomania name plates in small quantities. Great demand. Also make money with our line of Automobile Initials and Sign Letters. Free Samples. "Ralco", XL-Roxbury, Boston 19, Mass.

AGENTS—300% profit selling genuine gold window letters; stores and offices. Free samples. Metallic Letter Co., 437 N. Clark, Chicago.

JOBS Open In Selling! Send name, address for Free copy Opportunity Magazine, listing hundreds of companies who need men now, full or spare time. Experience not essential. Opportunity, 28 E. Jackson, Dept. 15, Chicago 4, Ill.

BIG Money Quickly and Easily taking orders for complete line Personalized Initialed Buckles, Belts, Cap Badges. 2,000 Emblems. Fast repeats. Write today. Hook-Fast Company, Box 480-PS, Roanoke, Virginia.

MAKE more money selling personal initialed individualized belts, buckles, cap badges, tie holders, name plates. 2,000 emblems to choose. Big profits, whole or part time. Write today—special outfit order. Hookfast Specialties, Box 1425, Dept. 7, Providence, Rhode Island.

SELL new, used clothing from home, auto, store. Wholesale catalog Free. Calumet Sales, 4719 Kennedy Ave., East Chicago, Indiana.

CALL on friends with sensational Christmas Cards in handy assortments. Sell for $1.00. Profit up to 50c. Also popular-priced Personal Christmas Cards, Everyday assortments, Stationery, Imported Napkins. Samples on approval. Wallace Brown, Dept. J-4, New York 10, N. Y.

FREE sample! Big profit opportunity with amazing Glow-In-The-Dark House Numbers, switch plates, pictures, decals, religious articles. Represent large manufacturer. Madison Mills, 303 Fourth Avenue, New York 10, N. Y.

PLASTIC Christmas cards. Exclusive new plastic, sachet, panoramic, and carols Christmas assortments. Five leading 21 card $1.00 feature assortments. Six portfolios of personal cards. All this plus America's fastest imprint service. Free samples. Elmcraft Card Co., 5930 South Western, Chicago 36, Ill.

$25 YOURS for selling only fifty $1.00 boxes, new exclusive different Christmas and all-occasion cards; also extra cash bonuses. Send for Champion Cheerio 21-card box on approval. Free samples 6 new personal groups and stationery. Write today. Dept. 37, Pen-Brush, 154 Nassau St., New York 7.

AGENTS Wanted for our Slot Machines and coin operated amusement games in every town and community. Sell to clubs and homes, or start a route. Webb Distributing Co., Dept. P40, 6 So. Kedzie Ave., Chicago 12, Ill.

A DRESS yours with every 3 you order for yourself and family. Amazing new bonus plan. Everything Free. Harford Frocks. Dept. S-9129. Cincinnati, Ohio.

AMAZING Profits $25.00 for selling 50 $1.00 DeLuxe Xmas boxes—embossed 50 and 25 for $1.00 name imprinted. Free samples. Ed-Brite. Dept. S-A. 435 North Terrace Avenue. Mt. Vernon, New York.

NEW exclusive Xmas photo greeting cards, amazing value, big profits, approval samples. Spooner Greetings. 115 Chauncy, Boston, Mass.

SALESMEN. Build year round business for new fast selling Household item. Big profits. Easy Sales. Plenty repeat business. Write at once for full Particulars. Lytle Supply Co., Ave. 6. Fredericksburg, Ohio.

MEN'S shirts, pajamas. Steady earnings, cotton dresses, nylon slips. Free sales portfolio. Jarod Manufacturing Corporation. Rockville Centre 5, New York.

CHRISTMAS Cards! Jobbers' Prices! Fifty different items from 18c to 38c per box. Gift Wraps. Seals. Christmas Tree Windows. Books. Letterheads. Illustrated Catalog Free! Fantus. 436 North Wells, Chicago.

ADVERTISING book matches—Cash in on big demand—sell Union Label matches. Cuts for all businesses and political parties—Free powerhouse selling kit—low prices—protection guaranteed on repeat orders—Cash commissions. Superior Match Co., Dept. P-98. 7530 Greenwood, Chicago.

POCKET Pal: Replaces Knives. New. Safe. Beautiful. Always razor sharp. 50c seller. 321% profit. $15.00 or more daily. Agents, Salesmen, Distributors. Sample 25c. Nelson Mfg. Co., 222 W. Kellogg, St. Paul 2, Minn.

EARN Big Money Year 'round. Be a one-person-department-store. Take orders for shirts, ties, hosiery, lingerie, Household linens, etc. For information Corporative Merchandisers, Dept. PS-6, 110 West 34th Street, N.Y.C. 1.

BE renewal headquarters for all magazines. Christmas gift sales starting now. Big profits. No experience. No capital needed. Free Catalog tells how. Write: McGregor Magazine Agency, Dept. 13, Mount Morris, Illinois.

HOT Items for Hardware dealers. Drop shipments. Farm Products, M-2019, Excelsior Springs, Mo.

EASY cash yours—steady, quick. Sell friends quality Nylon hosiery, lingerie, blouses. Free displays. Complete line greeting cards. Leader Christmas assortment on approval. Special outfit offers. Wear Wright Company, 1709 Arch St., Dept. B, Philadelphia, Pa.

INFORMATION — Wholesale supply sources. Moneymaking plans. Increase your income. Write Reynard Station, Smithfield 3, Ohio.

SILVER Plating Liquid—(NuSilver). Anyone can apply with cloth. Durable, guaranteed, genuine silver finish. Renews silverplated ware, articles, pieces. Silverplates brass, copper. Sales-Distributors wanted, exclusive. NuProcess Products, Aurora, Ill.

SCHOOL Seniors—Earn 40% commission selling classmates America's most beautiful Graduation Name Cards. Largest Selection. Outsells all others. Free Sample Kit. Printcraft, Dept. P, 1425 E. Elm St., Scranton 5, Pa.

IF you work in a factory or shop, you are passing up the opportunity of a lifetime to build a steady Extra Income by selling subscriptions to Popular Science Monthly to your fellow employees. For Free kit and complete instructions write on a postcard to—Manager of Agents, Dept. A149, Popular Science Publishing Co., Inc., 353 4th Ave., New York 10, N. Y.

GOLD lacquered Window Sign Letters. Large Sizes Penny Each. New Foils. Absolutely Beautiful. Free Samples. Atlas, 844 W. 79th, Chicago 20.

SELL ultra-blue stock signs to stores. 1000 slogans, comedy, general, religious. "7x11" cost 6c—Sells 35c—Make money. 15 samples Ultra-blue signs "7x11"—$1.00 postpaid. L. Lowy, 8 West Broadway, Dept. 415, New York City 7.

ENTIRELY new—entirely different specialized men's shoe line. Advance commissions to $2.50. Bonuses, personal discounts. Free selling kit. Concordian Shoes, P-1, West Concord, Mass.

FREE nylons given if Kendex hosiery runs or snags! World's only women's hosiery sold with a written guarantee that amazes everybody. Mere words could not possibly express the almost unbelievable opportunity you now have to make money. Fantastic and "impossible" earnings now become a reality. Can you imagine a guarantee that replaces hosiery regardless if damage is due to use or abuse and regardless whether it is the fault of the hose or the wearer? Here is sales dynamite that will blast your earnings to the sky! Even if you never sold a thing in your life, three magic words: "Guaranteed Against Everything" will open doors for you—will make women listen and will pour money in your pocket. Kendex stockings are not sold in stores, so you have no competition. Complete line includes beautiful sheer nylons; long wearing, durable service nylons; three different lengths; genuine outsize nylons; latest shades; choice of full fashioned with seams or seamless; lowest priced rayons. Also separate complete line of men's hosiery including nylon, lisle, rayon, cotton, mixtures, etc.; plain and fancy; long and short. Thousands of pairs shipped daily. No money or experience needed. Nothing to invest or risk. No samples to buy. Nothing to pay, now or later! Simply write orders. We deliver and collect. Liberal advance cash plus huge cash bonus. Write orders spare or full time; exclusively or as a side line. Become a manager and appoint others to sell for you with steady income on their sales! Complete money-making outfit, including sales books in colors, samples cut from actual hose, instructions, order blanks, etc. furnished free and prepaid. Rush name and address on postcard and start making money next week. Kendex Co., Babylon 166, N. Y.

LOOK here! Wanted—Men to start in business on our capital. Sell some 200 farm-home Products. Thousands our Dealers now make quick sales, big profits. For particulars write Rawleigh's, Dept. I-192-PSC, Freeport, Ill.

SOLVE your money problems. Sell friends 50 and 25 for $1.00. 25 for $1.95 Name Imprinted Christmas Cards—free sample portfolios. 32 different boxes. Profits to 100%. Bonus. Feature Christmas. All-Occasion assortments on approval. Special offers. Write Pilgrim Greeting Card Co., 111 Summer, Dept. AJ-1, Boston, Mass.

MAKE money fast! Sell Christmas cards to friends, neighbors, others. Big variety Etchings. Religious. 50 for $1.00. Wrappings, Stationery. New $1.25 line "Little Ones." Flower Box. Plastic Frosteds. Saints 'n' Sinners. Special offers, bonus. Fund raising opportunity for individuals, clubs, churches, schools. Mail postal today for feature 21 card $1.00 Christmas assortment on approval. Hedentamp, 343 Broadway, Dept. S-43, New York 13.

SELL Gold embossed monogram stationery. Sample free. Dunbars, Sanford, Fla.

EASY profits to 100%. Sell friends superior value 21-card $1.00 Christmas Assortment. 50 for $1.00 Personals. Everyday. Gift Wrappings. Stationery. Experience unnecessary. Request 1948's newest Super DeLuxe Christmas Assortment and Name Imprinted Christmas Card samples on approval. Holiday Card Co., 463 Congress St., Dept. MR, Portland, Maine.

$1 STARTS you in business. Sell lined ties. 100% wool interlining. Costs you only $7 per dozen, you make $5.00 dozen. Send $1.00 for special introductory offer two ties. Catalog complete line Free. Philip's Neckwear, 30 West 22nd St., Dept. P-26, New York 10.

SHINE Shoes Without "Polish." New Invention. Lightning seller. Shoes gleam like mirror. Samples sent on trial. Kristee 126, Akron, Ohio.

NEW extra money plan. Make up to 100% profit—without experience—showing Christmas, Everyday Card assortments, Wrappings, Stationery, Coasters. Unusual, attractive. Bonus. Special offers. Send for free samples 30 different Name Imprinted Christmas Cards. 50 for $1.00, 25 for $1.00 and $2.00. Stationery, Coasters, Christmas, Everyday assortments on approval. Thomas Terry Studios, 90 Union Ave., Westfield, Mass.

$5.00 CASH advance commission every sale. 38-piece "Lady Ann" silverplate table service. Guaranteed quality, value brings sales galore. Sells for only $14.95, including tarnish-resistant chest. Bonus premiums. Write for Free Outfit. Dexter Silver Co., 303 Fifth Ave., Dept. PS-9, New York.

AMAZING offer—$40 is yours for selling only 50 boxes, each containing 25 new, entirely different DeLuxe Christmas cards with or without name imprinted. Also 50 for $1.00. Free samples. Other boxes on approval. Write today. It costs nothing to try. Cheerful Card Co., 414 White Plains, N. Y.

QUICK cash. Sell friends wonder value name imprinted Christmas Cards 50 for $1.00 up to 25 for $2.50. 43 sensational money makers. Up to 100% profit. Bonus. Special offers. Write for 9 Free self-selling sample portfolios name imprinted Christmas Cards and Stationery. Rainbow Greeting Card Co., 38 East 1st St., Dept. 18-B, New York.

BIG, easy profits to 100% selling new, novel Christmas Card, Gift Wrapping, Panoramas, Christmas Carol assortments. Bonus. Special offers. Request free samples 50 for $1.00 Personals. Silver Imprint line. Name Imprinted and Floral Stationery and Feature Christmas samples on approval. New England Art Publishers, North Abington 249, Mass.

AT last! Something new and sensational in Christmas Cards. Gorgeous satin, velour designs never before offered. Amazing value! Gets orders fast. Name-imprinted Christmas Cards. 50 for $1 up. Big Profits. 30 other assortments 60c to $1. Imprinted Stationery. Samples on Approval. Furo Co., 2801 Locust, Dept. 841-L, St. Louis, Mo.

I'LL Put A "Shoe Store Business" In Your Pocket! Nation's Leader trains you to make Big Money! Fit men, women. Free Sample Outfit—Write Today! Victor Thomas Shoe Co., Dept. V-163, Chippewa Falls, Wis.

EVERY housewife a prospect for automatic Speedi-Waxer. Send for details two big profit sales plans. Darby Corporation, Dept. SS, 241 Centre St., New York 13, N. Y.

SPECTACULAR Guarantees, popular prices, make selling easy. Biggest steady repeat profits selling Colt's famous men's, women's Guaranteed shoes, hosiery. Experience unnecessary. Free selling outfit. Colt Shoes, 601-KP Atlantic, Boston 10, Mass.

FREE Folder Patented Household Specialty. Flinsen, Box 4333-B, Kansas City, Mo.

BUY thousands of nationally advertised products direct from manufacturers. Write for "Buy Direct and Save." Consumers Ass'n., 287-B Lebanon Ave., Mt. Lebanon, Pa.

WOULD you pay 3%—first $350 made? Color-illustrated book "505 Odd Successful Enterprises" free! Proven! Work at home, office. Expect something odd! Pacific, Oceanside, California.

PATENTED Flood Lights. Sell to theaters, lodges, auditoriums, schools, stores, homes. Literature free. Communications, Inc., 110 University, Seattle 1, Wash.

SCHOOL Seniors! Your postal will bring our wonder. Kwick-Sell Cardalog of popular Graduation Name Cards. Biggest profits!!! Only firm giving free souvenir chest and Card Case. Don't miss out! Hurry that postal!!! Craftcards, Box 238(M), Pittsburgh 30, Pennsylvania.

STEEL Hook Clips 1⅝" x ½". 1000—60c. Samples. Standard, 65 Duane, New York 7.

AGENTS wanted for our coin operated amusement and slot machines in every town and community. Sell—or start your own route. Big profits! Write for free wholesale catalog and deal. Aerobilt Products Co., Dept. 26, Box 3767, Baltimore 17, Maryland.

SELL New-Used clothing from home, auto, store. Men's suits $1.25. Leather Jackets 85c. Overcoats 56c. Dresses 16c. Ladies coats 38c. Other Bargains. Catalog Free. S&N, 565A Roosevelt, Chicago.

AGENTS—Salesmen—Fast seller—New—Different. Every woman needs—waiting to buy. Mr. F. made $304.20 in 3 days. Selling like wildfire. Sample furnished. Boulevard Art, 75-MB West VanBuren, Chicago.

SEWING Machine Electrification Kit. Nationall advertised guaranteed product. Unusual opportunity for right men. Potential earnings unlimited. For complete details write today to Brownell Co., 308 Canal St., New York 13, N. Y.

QUICK Cash. Salesmen, make $10.00—$15.00 daily with only six shoe sales. Good future, liberal bonus. Invest nothing. Experience unnecessary. Over 60 styles. Free outfit. Merritt Shoes, S-3, Brockton, Mass.

SELL famous $3 "Fire-Killer" extinguisher with bracket, wholesale or direct; exclusive territory. "Fire-Killer," Syracuse 1, N. Y.

63 HIGHGRADE SALESMEN

START your own business on our capital. Always your own boss. Hundreds average $6,000 to $25,000 annual Sales year after year. We supply stocks, equipment on credit. 200 home necessities. Selling experience unnecessary to start. Wonderful opportunity to own pleasant, profitable business backed by world-wide industry. Write Rawleigh's, Dept. I-U-PSC, Freeport, Ill.

MAKE $15.00 to $25.00 per day. Joe Louis' and Marva Louis' (his wife) toilet articles, cosmetics and other products for men and women are sensational. White people like them; colored people buy on sight. Perfumes, powders, pomades, creams, brown creams, flavors, remedies, and many other fast sellers are our features. $3.95 buys $10.03 (23 items) retail deal—send $1.00, pay postman balance. Be first in your community to offer this new line and you will be happy. Joe Louis Products Company, 6 E. Garfield Blvd., Dept. PS-9, Chicago 15, Illinois.

SILVER Plating Liquid—(NuSilver). Anyone can apply with cloth. Durable, guaranteed, genuine silver finish. Renews silverplated ware, articles, pieces. Silverplates brass, copper. Sales-Distributors wanted, exclusive. NuProcess Products, Aurora, Illinois.

BRAND New!! Revolutionary Products!! Salesmen make $10,000 yearly selling one complete lighting line. "Neo-Glo" Fluorescent changeable message sign replacing neon. "All-Lite" Table lamp using upright fluorescent tube, spectacular "Circline" fixtures using circular tube. Verticals. Dual-Rays. Pin-Up Lamps, a complete line of fluorescent and incandescent fixtures covering every commercial, industrial, residential need. A triple sales plan insures your success whether you choose selling dealers, direct, straight commission or distributorship on our capital. Get set now with our growing progressive organization. To get you started, we will send a beautifully illustrated catalog showing over 200 profitable, sales-tested styles and models. Order blanks, sales helps, everything needed to start at once included. It costs you nothing. Rush name quickly—Today—and start making real money. Rose Company, 539-QQ South Franklin, Chicago, Illinois.

MAKE Easy Extra Money. Sell Christmas Cards. 9 Beautiful Lines 25 for $1. Name Imprinted Samples Free. Cyphers Card Company, 78 W. Huron, Buffalo, N. Y.

SALESMEN. Earn $100.00 weekly, selling only six pair shoes daily. Commission and bonus. Wide variety for men, women, children. No investment. Experience unnecessary. Tanners Shoes, 301 Boston, Mass.

ALL kinds American, Swiss watches, new and used; retail $3.65—$345.00; profit 33⅓% up; show our catalogue, get orders. Brookings, B-1975CJ, Little Rock, Ark.

BIG money selling fluorescent lighting fixtures for manufacturer in your territory. Complete line. Latest designs. Low prices. Free Outfit. National Lighting, PS4221 Harrison, Chicago.

67 EDUCATIONAL AND INSTRUCTION

HAVE your own office! Many earn up to $5,000-$15,000 Annually. Learn credit-collection agency business by home study course. Experience unnecessary. Write for Free bulletin. No obligation. Franklin Credit School, Dept. 203-J, Roanoke 7, Va.

BOOKKEEPERS! Increase your earnings! Operate your own simplified "Dollar-A-Week" Bookkeeping and Tax Service. Full or Spare time. Details Free. No obligation. Ellis, Box 203, Cedar Grove, North Carolina.

NURSES' Training School. Make up to $30-$40 week as a trained practical nurse! Learn quickly at home. Booklet free. Chicago School of Nursing, Dept. M-9, Chicago.

"UNCLE SAM" Jobs! Congress raises pay $330 to $450. Men-Women Qualify at home for examinations. 40-page book; sample lessons—Free. Write Franklin Institute, Dept. F-22, Rochester, N. Y.

USED Correspondence Courses and Educational Books Bought, Sold, Rented. Catalog Free. Educational Exchange, Summerville, Ga.

SPEED and Skill in Radio Code to qualify for Amateur or Commercial Radiotelegraph License. Learn at home with the famous Candler System used to train radiotelegraph experts and champions. Good pay or fascinating and profitable hobby. Free Book. Candler, Dept. 6-K, Box 928, Denver, Colo.

HOME Study course, drugless therapy. Free Literature. Inst. of Drugless Therapy, Tama, Iowa.

NATIONAL School of Foot Correction:—Juneau 2, Alaska. Extension. Degree. Details, 25c coin.

MEDICAL Laboratory Technicians in great demand. We train you in your own home, in your spare time. Also home study course in General Chemistry. Catalogue free. Imperial Technical Institute, Box 973-S, Austin, Texas.

JUNIOR College Diploma through Home Study. Liberal Arts and Christian Education. University Foundation, PS, St. Augustine, Florida.

FOR an extremely profitable lifetime business operate a Collection Agency-Credit Bureau. Easily learned. Free folder. Cole & Associates, Syracuse 2, New York.

WHY Don't You Write? Writing short stories, articles, etc., will enable you to earn extra money. In your spare time we teach you to write the way newspaper men learn—by writing. Free "Writing Aptitude Test" tells whether you possess the fundamental qualities essential to successful writing. Veterans: This course approved for Veterans' Training. Write today! Newspaper Institute of America, Suite 5668-P, One Park Ave., New York 16.

DEVELOP photographic mind by Supermemory. Write Thor Books, CS-9, Box 1210, Chicago.

"AIR Conditioning, Refrigeration, and Heating." Nine months resident course of complete technical and practical training for those who want to become Sales Engineers, Contractors, Estimators, Installers or Service Men. Write for free booklet. Now accepting enrollments for September and October classes. G.I. approved. Detroit Air Conditioning Institute, 4125 Grand River Ave., Detroit 8, Mich.

LEARN typewriter repairing under G.I. Bill. Adding Machine and Calculator courses available. For information write Dept. PS-9, Capitol School of Typewriter Mechanics, 1328 New York Avenue, N.W., Washington, D. C.

LEARN Dental technician trade. Ten simple lessons $5.00. Grant Laboratory, R. Los Angeles 14, Calif.

AMAZE others. Add columns instantly. Add faster than adding machine. Free details. Maths Institute, Box 463, Nashville 2, Tenn.

LEARN Piano Tuning. Prepare for Career in fascinating profession. $5,000 year easily earned. Real security, pleasant easy work. No profession Paying so well can be mastered so quickly. Natural Aptitude, desire to get ahead chief requirements. Prospectus and full information on request. Harmony School of Piano Tuning, Box 582, Harrisburg, Pa.

LEARN Math at home. Individualized Instruction. Details Free. New correspondence School, Box 27, St. Johns Station, Brooklyn 13, N. Y.

LEARN Bricklaying. Complete home Instructions by expert. M. Wall, Pinehill Rd. Jackson, Miss.

SHOE Repair School. Teach you quickly! Age 18 to 60. In 12 weeks you can be skilled. Modern Shoe Rebuilding, 4577 Hollywood Blvd., Los Angeles—2935 Belmont, Chicago.

69 CONTESTS

$1,000,000 FREE—Contests—Yearly. Win fortune. Winners prepare your entries—lowest cost. Research, 13 Earl Street, Red Bank, N. J.

70 LANGUAGE OUTFITS

LINGUAPHONE Makes Languages Easy at home. Learn to speak Spanish, Portuguese, Italian, French, German, Russian, by quick, easy Linguaphone conversational method. Save time, work, money. Linguaphone Correspondence Courses are available to veterans under G.I. Bill of Rights. Send for free book. State if G.I. Linguaphone Institute, 54 RCA Bldg., New York 20, N. Y.

72 AUTHORS SERVICE

I WANT New Writers to cash hundreds of checks for $1 to $100, offered each month. The easiest way to write for pay. No previous experience necessary. Send for Free details. No obligation. Saunders M. Cummings, 467-S Independence Bldg., Colorado Springs, Colo.

MANUSCRIPTS professionally rewritten for publication. Send manuscripts. Free examination-quotation. Renseb, 30 Church, N. Y. 7, N. Y.

73 BUSINESS SERVICE

CONFIDENTIAL Reports! Questions answered, any subject, $1.00. Melex Research, Covington 7, Virginia.

74 CARTOONING, SIGN PAINTING, DRAWING AIDS

"HOW to make money with simple cartoons". A book everyone who likes to draw should have. It is free; no obligation. Simply address Cartoonists' Exchange, Dept. 199-C, Pleasant Hill, Ohio.

9 ALPHABET 3 Numeral Pattern Sets and Catalog $1.00. Sign Letter Distributors, P. O. Box 101, Mineola, N. Y.

SIGN painting taught at home by an old master. Ben Kerns, Box 812, Greenville, S. C.

FAMOUS $75 Lockwood Art Course now only $6 postpaid. Other smashing art bargains. Catalog 10c. Art Book Shop, Arnold 6, Mo.

75 CHALK TALK-STUNTS

CHALK Talks, Laugh Producing Program, $1.00. Illustrated Catalog 10c. Cartoonist Balda, Oshkosh, Wisconsin.

76 TYPEWRITERS

RECONDITIONED Typewriters. Printing Devices. Office Appliances. Supplies. Dixiegraph, King, N. C.

78 RUBBER STAMPS

DELUXE Cushioned, indexed, knob handle; Three lines $1.00, two 75c. Quick Service. Catalog 10c. Warner Stationary, Box P-43, Havre de Grace, Maryland.

QUALITY Stamps! 3 Lines, 50c. 250 Letterheads—Envelopes, $1.50. Catalogue. Johnson Press, Box 6-B, New York City 26.

79 PRINTING OUTFITS, SUPPLIES

"PRINTOMATIC" Self-feeding Post Card Stencil Printing Duplicators $9.50 Up. Office Size Duplicators, Speedoprints, Hilcos, Excellographs $33.41 Up. Literature Free. Pittsburgh Typewriter Supply, 336 WE Fourth Ave., Pittsburgh 22, Pa.

CUTS: 1900 designs, 49c each. Catalog dime. 337B West Mason, Jackson, Mich.

PRINTING outfits, type. Send dime for illustrated supply book. Kelsey H-8, Meriden, Connecticut.

INEXPENSIVE home-made printing press. Details free. Novelty Shop, Downsville, Louisiana.

PLASTIC Printing Cuts. Make your own. New Plexiplate Process. Plexiservice, Argyle 2, Wisconsin.

PRINTING Presses, Type Supplies. Lists 3c. Turnbaugh Service, Loysville, Penna.

80 PRINTING, MULTIGRAPHING, ETC.

STOCK Labels. Decalcomanies. Embossed Seals. Write for catalogue. Labels & Decals, 22 Lake Street, Oak Park, Ill.

150—8½x11 LETTERHEADS, 125 Envelopes, beautifully printed, $2.00. Calder's, Box 3422-SP, Philadelphia 22, Penna.

SPEEDOPRINT Duplicators. Supplies. Accessories. Free catalogue. Roberts Office Supply, Farmington 2, Missouri.

SEND 10c Now, for our 48 page price-list—Refunded first order. McCall Press (PSM), 1326 South 27th, Omaha 5, Nebr.

250 BUSINESS Cards $1.00 postpaid. Brems, 40-06 97th, Corona 2, New York.

250 8½ x 11 BOND letterheads, 250 envelopes, $3.00 postpaid. Sidney Johnson, Ben Hur, Ark.

BUSINESS, Personal Stationery. State requirements. Samples. Price lists free. How Printing Company, 717-23 Eunice, Webster Groves 19.

PERSONALIZED Stationery In Smart Raised Letter. Christmas Cards. Free Catalogue. Merz Printery, 135 Lenox, Rochester 11, New York.

QUALITY Printing: Business, personal stationery. State requirements. Samples. Mero Products, 99 Morrison, Punxsutawney, Penna.

82 PATENT ATTORNEYS

INVENTORS. For "Record of Invention" form, contact Carl Miller, Registered Patent Attorney, Woolworth Building, New York.

INVENTORS: Write for free brochure "Evidence of Invention." Labiner, World Building, New York 7.

PATENT practice before U. S. Patent Office. Validity and infringement investigations and opinions. Booklet and form "Evidence of Conception" forwarded upon request. Lancaster, Allwine & Rommel, Registered Patent Attorneys, Suite 413, 815—15th St. N.W., Washington 5, D. C.

INVENTORS: Without obligation, write for information explaining the steps you should take to secure a Patent. John N. Randolph, Registered Patent Attorney, 207 Columbian Bldg., Washington 1, D. C.

INVENTORS: Learn how to protect your invention. Unless the inventor is familiar with patent matters, he should engage a competent registered patent attorney or agent to represent him. We are registered to practice before the U. S. Patent Office and prepared to serve you in handling your patent matters. "Patent Guide for the Inventor" containing detailed information concerning patent protection and procedure with "Record of Invention" form will be forwarded to you upon request—without obligation. Clarence A. O'Brien & Harvey Jacobson, Registered Patent Attorneys, 82B-G District National Building, Washington, D. C.

PATENTS—Trade marks. Irving L. McCathran, 316 McLachlen Bldg., Washington 1, D. C. Registered Patent Attorney.

INVENTOR'S Guide free on request. Frank Ledermann, Registered Patent Attorney, 154 Nassau St., New York 7, N. Y.

C. A. Snow & Co.—S-427. Snow Building, Washington 1, D. C. Registered Patent Attorneys. Write for information.

INVENTORS: When you are satisfied that you have invented something of value write me, without obligation, for information as to what steps you should take to secure a Patent. Write Patrick D. Beavers (Formerly Randolph & Beavers) Registered Patent Atty., 938 Columbian Bldg., Washington 1, D. C.

INVENTORS—A Patent is a Valuable Right. Send for booklet, "Patent Protection for Inventors," outlining the preliminary steps to take to obtain patent protection. Victor J. Evans & Co., 341-K Merlin Building, Washington 6, D. C.

INVENTORS—Patent laws encourage the development of inventions. Our firm is registered to practice before the U. S. Patent Office. Write for further particulars as to patent protection and procedure and "Invention Record" form at once. No obligation. McMorrow, Berman & Davidson, Registered Patent Attorneys, 143-B Victor Building, Washington 1, D. C.

83 FOR INVENTORS

"INVENTOR'S Guide" free on request. Frank Ledermann, Registered Patent Attorney, 154 Nassau St., New York 7, N. Y.

INVENTORS: Without obligation, write for information explaining the steps you should take to secure a Patent on your invention. John N. Randolph, Registered Patent Attorney, 206 Columbian Bldg., Washington 1, D. C.

INVENTORS: The usual First Step is to have a search of the U.S. Patents conducted, so I can report on Patentability. Write, without obligation, Patrick D. Beavers (Formerly Randolph & Beavers) Registered Patent Atty., 939 Columbian Bldg., Washington (1), D. C.

INVENTORS: If you have an invention for sale, patented or unpatented, write Institute of American Inventors, Dept. 30A, 1926 Eye St. N.W., Washington 6, D. C.

IF you have an idea for a new product take advantage of our expert advice. Free booklet "O" tells you how we can convert your ideas into commercial products, fully protected, and introduce them to reliable manufacturers. Elo Development Co., 29-28 41st Ave., L.I.C.1, IR 6-6219.

PATENT searchers—reliable, efficient, air mail service—$6.00. Write for free invention protection form. Patent Research Service, 703 Albee Bldg., Washington 5, D. C.

INVENTORS: Learn how to protect your invention. Unless the inventor is familiar with patent matters, he should engage a competent registered patent attorney or agent to represent him. We are registered to practice before the U. S. Patent Office and prepared to serve you in handling your patent matters. "Patent Guide for the Inventor" containing detailed information concerning patent protection and procedure with "Record of Invention" form will be forwarded to you upon request—without obligation. Clarence A. O'Brien & Harvey Jacobson, Registered Patent Attorneys, 82A-G District National Building, Washington, D. C.

PARTS Manufacturer wants Patented or Patent Pending inventions to manufacture and market. Your share guaranteed. Industrial Engineer, 3401 Martin Avenue, Detroit 10, Mich.

FILE Patents Yourself. Information Free. Birsh, 712 A Manhattan Ave., Brooklyn 22.

INVENTORS—Send today for booklet "Patent Protection for Inventors" containing detailed patent information and preliminary steps to take toward patent protection.—also "Evidence of Invention" form. Victor J. Evans & Co., 342-K Merlin Building, Washington 6, D. C.

INVENTORS—Patent laws encourage the development of inventions. Our firm is registered to practice before the U. S. Patent Office. Write for further particulars as to patent protection and procedure and "Invention Record" form at once. No obligation. McMorrow, Berman & Davidson, Registered Patent Attorneys, 143-A Victor Building, Washington 1, D. C.

READ safest, surest methods for greatest possible royalties, in "Inventors' Business Manual." Information free. RicCraft, Dept. A, Box 1466, Tampa, Florida.

INVENTORS—Save up to $250 or more! Make your search and obtain your patent without assistance. Simplified system. Complete instructions $2.00. Money back if not as advertised. International Patent Library, 318 Evans Building, Washington, D. C.

PATENTED. Unpatented inventions promoted. M. Joyce Humphries, 1424 Landtitle, Phila. 10, Penna.

84 INVENTIONS WANTED

INVENTORS: Hundreds of manufacturers have requested our assistance in locating marketable new products. Complete information, free. Institute of American Inventors, Dept. 30C, 1926 Eye St., N.W., Washington 6, D. C.

INVENTIONS Promoted. Patented or unpatented. Write Adam Fisher Company, 183-A Enright, St. Louis, Mo.

SMALL Inventions wanted by manufacturers. I'll help you sell your invention. Write for circular. S. Hull, 7829 Euclid, Cleveland, Ohio.

INVENTORS—What have you patented, patent pending for manufacturers? Submit details, or request free booklet and information. Direct Contacts, 11106-B2, Longwood, Chicago 43.

CASH For your idea. 280 manufacturers need inventions, patented or unpatented. List free. Invention Bureau, 209-S Clinton, Oak Park, Illinois.

HIGHEST Royalties-Cash. Official U.S.I.R.C. certified service. Request free Booklet "C." Universal Marketing Co., 126 Lexington Avenue, New York 16, N. Y.

85 PATENTS

INVENTORS: Test the commercial value of your patented or unpatented inventions, quickly and inexpensively. Write for free information. Institute of American Inventors, Dept. 30-B, 1926 Eye St., N. W., Washington 6, D. C.

86 PATENTS FOR SALE

UNIQUE Tool that sells Internationally seeks manufacturer royalty. B. P. Bonanno, 215 Kingsland Ave., Lyndhurst, N. J.

88 MANUFACTURING

MODELS small lot manufacturing, metals, plastics, etc. Millburn, Burlington, Ky.

89 MODELS, MODEL SUPPLIES

MODEL Ship Builders! Are you looking for authentic, precision ship models? Send for richly illustrated fully descriptive catalogue in full color of famous ships of all kinds. Only 25c. Halesite Yacht Service Inc., Dept. C-45, Halesite, Long Island, N. Y.

MOST complete Illustrated Catalog—"O-HO OO" Model Railroad Parts ever published. Send 5c for mailing. Selley, 1377 Gates Ave., Dept. 836, Brooklyn, N. Y.

SHIP and Yacht model fittings; blueprints. Send 25c for illustrated catalog No. 21—Listing hundreds of items. A. J. Fisher, 1002-3 Etowah Ave., Royal Oak, Mich.

RADIO Control Planes. Complete. Less than $100.00. 10c please. Hobby Center, 12240 Gratiot, Detroit.

BUILD Historic Ship Models. Complete Kits 39c to $8.50; Send 10c for catalog. Ideal Models, 21 West 18th Street, New York 11, N. Y.

SHIP Model and yacht supplies, complete large 64 page catalogue, 30c. Wm. Wild, 510 E. 11th St., New York City.

SHIP Models—Most complete line in New England of kits, parts, plans and books. Steam and electric power plants for working models. Big catalogue 25c. Dept. S, James Bliss & Co., Inc., 220 State St., Boston, Mass.

SHIPMODEL kits and fittings of authentic design and detail. Model kits include brigs, fisherman, cutter, clipper. New catalog, 15c. Model Shipways, Folio 40, 476 Main St., Fort Lee, N. J.

BRASS Gears and model supplies for the inventors. Send 10c for catalog. Pierce Model Works, Tinley Park, Ill.

POWER Models—steam and gasoline engines, steam traction engine, metals, tools. Catalog 35c. Charles Cole, Ventura, Calif.

STEAM engines, boilers, castings. Catalog 25c. Anton Bohaboy, 2297 Price, Rahway, New Jersey.

MODEL Gas Engine Castings. Particulars 10c. Maskol, 6806 Crossway, Baltimore 22, Md.

91 HOME CRAFTSMEN

SPECIAL 77 Full Sized Patterns, Lawn Ornaments, Toys and Novelties. $1.00. Modern Woodcraft, Saginaw, Mich.

BEAUTIFUL Texas Ebony. Large piece, $1. Sample, dime. Particulars, stamp. Many other hardwoods. Starcraft (2), Edinburg, Texas.

LEATHERCRAFT Supply Catalog free. Art Craft Supply, 1205 Throckmorton, Fort Worth, Texas.

LAWN chairs, garden figures, furniture, novelties, toys, etc. 68 popular plans with full size patterns. $1.00. Mastercraft 98, 7041 Olcott, Chicago 31, Illinois.

KLONDIKE! For Jewelry Makers! Novelty Jewelry finding swept from manufacturers' tables. Parts for bracelets, pins, earrings, finished and unfinished chains, rings, stones, clips, beads, many others. Sample pound assortment $2.00, pound lots $7.50. Also, Unset Stones, for rings, jewelry; all colors, sizes, designs. 1,000 assortment $5.00, sample 100 assortment $1.50. Also, Beads, assorted colors, sizes. 5 pound lots $4.00, sample pound $1.00. Prepaid only. Merchandise Distribution, 19 East 16th Street, New York 3.

SPECIAL Offer: 80 full size toy, novelty, and lawn ornament patterns only $1.00 Postpaid. Lynds, Box 193E, Medway, Mass.

LAWN chairs, garden figures, furniture, novelties, toys, etc., 68 popular plans with full size patterns. $1.00. Mastercraft 98, 7041 Olcott, Chicago 31, Ill.

WOOD Carvers. New Zealand Maori carving. Designs, instructions, legends. $1.00. Culver, Box 628, Fullerton, Calif.

LEATHER designs; tooling, carving. All new! Patterns and instructions for making many articles. $1.00. Lampkin Artcrafts, Box 641-S, Culver City, Calif.

COPPER and Brass Materials. Complete line for Craftsmen and Workshops. Catalog Free. Groundmaster Company, Boulder, Colorado.

LEATHERCRAFT! Complete stocks of leathers, tools, supplies. Immediate shipment. Free catalog. Kit Kraft, Dept. 3203 W. Washington Blvd., Los Angeles 16, Cal.

CRAFTSMEN'S deals. Mahogany and other cabinet lumber. Veneers of all kinds. Sedlo Company, P. O. Box 7161, New Orleans, La.

CASTINGS, make your own, bronze, aluminum, etc., Price list supplies and equipment free. Lehnert Company, Norwood 3, N. J.

GENUINE Chair cane webbing reed basketry. Samples dime. Fogarty Caner, Troy, N. Y.

SHELLCRAFT—Create attractive jewelry from shells. Instruction book free or send $1 for 450 Caribbean shells and findings to make $4 worth. Shell Company, Miami 36, Florida.

"SWISS music movements $3.75, two tunes $4.75. Kits $4.75 up. Irv Meyers, 126 Lexington, New York 16, New York."

BIG Profits From Small Bits of Wood. Write Dollhouse Novelties, 19 Baker Street, Saugus, Massachusetts.

FINE Size Music Spring Wire ¼ pound each .016", .031", .049" and .063" diameter. $2.00 Postpaid in U.S.A. Seastrand, Box 783, Worcester, Mass.

92 BLUEPRINTS AND PLANS

SPECIFICATION & Prints of the first successful permanent magnet motor $10.00; Plus right to make model. Send ten cents for literature. George J. Altman, 150 Broadway, New York 7.

93 BUILD IT YOURSELF

STREAMLINED. Built-in kitchen cabinets to fit any kitchen. Complete, easy to understand detailed plans and specifications showing "professional" construction methods. All for $1.00. Thombert Co., Box 447A, Newton, Iowa.

BUILD Concrete Blockmaker. Inexpensive. Practical. Motor or hand. Free Details. Clyde Lee, Mountain View 1, Okla.

ZEOLITE home water softener. Plans for building your own $1. Materials available from us. Lake Region Mfg. Co., Inc., 3920 K Lynn Ave., Minneapolis 16, Minn.

INVENTORS—Patent laws encourage the development of inventions. Our firm is registered to practice before the U. S. Patent Office. Write for further particulars as to patent protection and procedure and "Invention Record" form at once. No obligation. McMorrow, Berman & Davidson, Registered Patent Attorneys, 143-C Victor Building, Washington 1, D. C.

BUILD concrete block machines, portable saw mills, shop, home, farm machines. 183 plans. Catalog handbook free. Nichols Equipment Co., Dept. 1504, Purvis, Miss.

"CONCRETE Block Homes." 32 page booklet; drawings, instructions on how to build. $1.00. H. C. Lightfoot, Civil Engineer, Richboro, Penna.

MAKE your own handy lightweight Concrete Blocks quickly with new Blockmaker. Circular stamp. Manual 25c. Peerless, New Lenox 1, Illinois.

WANTED: Machine improvement adviser. Design, build small operating units. Own workshop. Standard, 65 Duane, New York 7.

HOUSE plans. Specifications. Prepared. Lowest charges. Save 90%! McDonald Realty, Austin, Texas.

95 OLD GOLD, WATCHES, ETC.

HIGHEST Cash for old, broken jewelry. Mail Gold Teeth, Watches, Rings, Silverware, Diamonds, Spectacles. Satisfaction Guaranteed. Free Information. Rose Smelting Co., 29-Y East Madison, Chicago.

96 JEWELRY

JEWELERS supplies, findings. Latest catalog, 10c. George Sassen, 154 Nassau Street, New York 7.

RHINESTONES — Moonstones — Pearls —Findings. Free literature. Herber, 1360-B Hicks, New York 67.

STAINLESS Allegheny Metal costume jewelry guaranteed non-tarnishing. Matched sets, earrings, choker, bracelet. Wholesale prices to agents, jobbers, etc. Literature, details free. Leechburg Stainless Products Co., 251 Market St., Leechburg, Pa.

STUN Your friends with genuine, sparkling, brilliant-white Zircons. Cut, polished, mounted just like diamonds. Amazing diamond-like appearance. Top-quality. Hard for even experts to tell the difference. Beautiful settings 14K gold. Over 100 gorgeous latest-style rings to choose from. Attractive low prices. Send for big Free Catalog. U. S. Zircon Syndicate, 139 N. Clark, Dept. 16, Chicago 2.

MAKE Your Own Jewelry! All types of findings, plastic and metal; cameos, beads, shellkits, illustr. catalog, 20c. Hobby Art, Dept. 6, POB 276, New York 18, N. Y.

MAKE shell costume jewelry at home. Complete supplies. Kits. Catalog. Tropical Shell-Art, 2 North Third Avenue, Mt. Vernon, N. Y.

CERAMIC Jewelry Supplies. Bar Pins, ear screws, for ceramic and woodworkers, also, glass and sea shell assemblers. Free catalog. Philadelphia Badge Co., 1007 Filbert St., Philadelphia, Pa. Dept. E-1.

SEMI-finished cowboy buckle sets rings, etc., in silver. Will cast 10 or 10,000 items in gold or silver from your model or drawing. Free circular. Southwestern, Box 3506, Station A, El Paso, Texas.

97 TOBACCO & PIPES

ATTENTION! Pipe smokers. For a cooler, dryer smoke, try a Dribole spring. Ends clogged stem 25c. White 8526 3rd Ave., Brooklyn 9, N. Y.

SECONDS $5.00 pipes 65c. Pipemaking kit $1.00. Free literature. Carvapipe, 2829-F Dixie, Hamilton, Ohio.

MAKE smoking pipes, briar blocks and stems. Send for circular. Michelson & Sternberg, 23 West 47th Street, New York 19.

PIPES repaired cheap. Free Catalog. Sidney Ram, 156 N. Franklin, Chicago 6, Illinois.

100 MISCELLANEOUS

"HOW To Win Prize Contests" Amazing Booklet $1.00. Box 28EPS, Jackson Heights, New York.

LOCKSMITHING, secrets, key fitting, lock repairing, opening, prices, sources. Illustrated book $1.00. Wexler, 7 W. 36, N.Y.C.

BIG Mails 10c; year 50c; Name listed directory 25c. Harvey Teeple, Decatur, Indiana.

FREE Assortment, photos typical Mexico. Aztec Indians, Pyramids, quaint scenery. Send twenty cents postage stamps, mailing cost. "Ahora." Apartado 2807A, Mexico City, Mexico.

CESSPOOL trouble cured by the new Septic Bend Co., Rockland, Mass.

HYPNOTIZE! Control the minds and actions of others! Completely illustrated course $1.00. Money Back guarantee. Fowler, Box 1284, Boston 4, Mass.

MANUFACTURERS (medical-other). Suffolk County Distributor, Box 1, Islip, L. I.

BIRD Baths, Pots, Urns, Benches, Pipe. Made at home! We sell forms. Concrete Machinery, Hickory 3, N. C.

SLIGHTLY used suits, topcoats, overcoats. Hartman, 224 West Centre, Mahoney City, Pa. Men's clothing, etc., bought, information furnished.

FIREWORKS: Don't be disappointed. Get Famous Banner Fireworks with all the newest and startling effects. Giant cannon salutes that rock you like a crash of thunder. Whistling devils with weird unearthly noises. Skyrockets that burst in majestic colorful display. Gasp in amazement as you watch the battle in the clouds. Genuine Chinese firecrackers. Over 500 pieces including sparklers for the little tots. Retail value $12.25 for only $4.95. Rush order today. Any quantity. Send money order, bank draft or currency. No c.o.d.'s. Big new catalog free. Banner Fireworks Mfg. Co., Inc., Dept. 114, 446 Capistrano, Toledo 12, Ohio.

MEDICAL Laboratory Technicians in great demand. We train you in your own Home, in your spare time. Also home study course in General Chemistry. Catalogue free. Imperial Technical Institute, Box 973-S, Austin, Texas.

MEXICAN Jumping Beans—Dozen 25c; 100, $1.00; 500, $3.50. Mexican Products Co., 126 N. Main, Tulsa 3, Oklahoma.

HYDROPONICS, Soiless vegetables, cheap chemicals. Free information. Box 57A, Bristol, Virginia.

MEN! Large size shoes, large size sox: We specialize in large sizes 10 to 16, widths AA-EEE. Oxfords, Hitops, Work shoes. Guaranteed extra quality. Free Catalog. Kingsize, 553 Brockton, Mass.

"INTERESTING Mails." 25c will keep your mail box full for three months. Bentz, Jr., Chatawa 43, Mississippi.

HYPNOTISM, Psychiatry, Super-Memory, Self-Help, Occultism, Magic, Sex—Illustrated catalogue unusual Power Books only 10c. Not recommended for minors. Power Publishers, 84, 790 Broad St., Newark 2, N. J.

ART Photos! Sample 50c, 3 for $1.00. Post Office Box 2011, Phoenix, Arizona.

CACTUS, box of 5 varieties $1.00 postpaid, free catalog. Mexican Curios, Springer's, El Paso, Texas.

CAN a Man My Age Become a Hotel Executive Even Though He Has No Previous Hotel Experience? Would you like to step into a well-paid position as Hotel or Club Manager, Purchasing Agent, Social Director or Assistant Manager, etc? The success of Lewis graduates from 18-50 Proves you can—though you never had a minute's experience in hotel work. C. P. Hearne says: "Shortly after receiving my diploma from the Lewis School, I gave up my job in a power plant and accepted a position obtained for me by the Lewis Placement Bureau as Assistant to the Manager of a famous country club. Now manager and had three raises in salary." Our Free Book, "Your Big Opportunity," explains how you can qualify for a well paid position in leisure time, how you are registered Free of extra cost in Lewis National Placement Service; shows how you can be a Lewis Certified Employee—certified to "make good" when placed. Write for it today. Course approved for Veteran's Training. Lewis Hotel Training School, Desk NS-2724, Washington 7, D. C.

HULL Automobile Compass, value $4.95, brand new, $2.50. Prisms for 6 x 30 or 8 x 30 binoculars, brand new, $1.50 each. Offset prisms to be attached to 7 x 50 B & L Binoculars, gives double the field of the ordinary 7 x 50 binocular. Cost $98.00, special $25.00. Green sunshades for binoculars, size 6 x 30 and 7 x 50, snap on type, value $7.50, special $1.25 per pair. Forward money order. No C.O.D. shipments. Send 25c for catalog of new and used guns, ammunition, binoculars and powder flasks. Public Sport Shops, 11 S. 16th Street, Philadelphia, Pa.

ENJOY a Mexican Enchilada dinner. Serves 6 persons. Tasty—different. $2.00 Prepaid. Springer's, El Paso, Texas.

"DID Moses write Pentateuch?" 10c. Christian Evidence League, Malverne, N. Y.

PANNING Gold—Free instructions. Catalogue mining books—supplies. Old Prospector, B-148, Dutch Flat, Calif.

PRODUCTION Machining Small Items. Send Prints. Goldammer, Eureka Springs, Arkansas.

SMALL Business Bookkeeping, payroll and tax service. One dollar and up weekly. Ebco Service, 2907 Berwick Ave., Baltimore 14, Maryland.

FAMOUS Bostonian Shirts Now in Full Production Again—This nationally known shirt maker, est. 1863, making one of the finest lines of shirts in the country is now adding a limited number of sales agents selling direct to the consumer; liberal commission; fast selling, quality line, repeat sales. No investment, immediate commission, establish your own business; make up to $5000 yearly. Write for free sales kit. Bostonian Mfg. Co., 89 Bickford St., Boston 30, Mass., Dept. PS9.

SEND 6 ties you're tired of—Receive 6 cleaned different ties. Pay $1.00 C.O.D. plus postage. Ty-Trade, Box 18, Rochester 1, N. Y.

"BROADWAY Ballyhoo"—Lyrics. Wit, Humor Publication. Distributors Wanted. $30.00 Thousand. Sample 10c. Noveline Enterprises, 1451 Broadway, New York.

SQUARE-ROOT, Easy Short Cut. 15c. Prof. Lineback, A&M, Stillwater, Okla.

TWENTY U. S. Army Shoulder Patches Our Choice $1.00. Springer's, El Paso, Tex.

PLUMBING—Heating Supplies—Electrical Appliances—Parts for Boilers, Furnaces and Plumbing Fixtures Wholesale to All. Gateway Supply Corporation, 4867 Milwaukee, Chicago.

101 FOR SALE — MISCELLANEOUS

VACUUM Cleaner Attachment, Patent Pending. Plastic or metal construction. 816 No. Carlisle, Albuquerque, N. M.

102 WANTED MISCELLANEOUS

ANYTHING of value. Armond, 207 North Fifth Street, Springfield, Illinois.

MERCURY—Highest prices. Free Containers. Write Mercury Terminal, Norwood, Mass.

CASH paid for home workshop products. Details free. Home Workshop Sales Bureau, Dept. S-1, Farnsworth, Great Lakes, Ill.

SINGER sewing machine Dropheads wanted. $15 for long Bobbin model, $25 round bobbin model. Write serial number and model. Dept. S, Box 129, N. Y. 16, N.Y.

CASH paid for almost anything. Catalogue 50c. Buyers' Bulletin, Box 415, Evansville, Indiana.

103 FOR THE HOME

INCREASE the value of your home with Ornamental Ironwork. Free circular. Berry's Products. Parkersburg. W. Va.

104 PERSONAL

HOW You can find out! Information discretely developed. Any matter, person, problem, anywhere. Personal-Business assignments, representations undertaken. Nationwide. Officially licensed, bonded service. Established 1922. Reasonable. Confidential. William Herman, 170 Broadway. New York.

RUPTURED? Positive comfort, no understraps, no steel, no elastic. Write Smith Manufacturing Co., Preston, Ontario.

HAIR Falling? Dandruff? Write Trichologist. 139 Lewis Street. Phillipsburg. N. J.

MAKE Friends Everywhere. Enjoy friendship immediately. Copyrighted literature explains details. Helpful. Free Particulars. Interested persons write Strone. Box 157-PS. New York 11.

MYSTIFY your friends, send them letters from glamorous Beverly Hills. 25c each. $1.00 monthly. Box 544. Beverly Hills. California.

MEXICAN Law. General Practice Attorney. 1203 Arizona Street. El Paso. Tex.

CORN and callouse remover. Dr. Hunt's Corn Remover: Removes by penetration, the scientific method. Why suffer longer? Mail Orders 25 cents. Marine Chowanes. 238 West Arlington. Shenandoah. Penna.

INFORMATION for single people by Human Relations Consultant. University Graduate. Dr. B. Long. Box 375. Los Angeles 53. Calif.

RUPTURED? Be a different person positive comfort with any good truss. Information $1.00. Dixon Service. Box 23. Dixon. Illinois.

BALDNESS—can it be prevented? Restore health to your scalp. Give your hair a chance to grow. Free booklet. Vanguard Reports. 3009-J Military Road. Washington 15. D. C.

"PROPHECIES of Daniel." 50c. Bulletin. Box 87. Cathedral Station. New York 25.

ART. Scenic photos. Sample 35c. 4—$1.00. Color Slides 50c. 3—$1.00. Movies—Sample. Brochure 25c. Novelty. 1227 E. Van Buren. Phoenix. Arizona.

FREE to victims of Dandruff, Thinning Hair, Dry Hair or Dry Scalp. 16-page illustrated Booklet packed with helpful information bringing prompt relief, better hair. Regime Counselors. Dept. G-2. 9 S. Clinton Street. Chicago 6.

TRUE spiritual readings. 3 questions for $1.00. Enclose self stamped envelopes. Olivetta Taylor. P. O. Box 295. Columbus 19. Ohio.

LETTERS forwarded 25c each. Byrne. 1901 W. Main. Kalamazoo. Michigan.

GOLD engraved plastic name plates, 2" x 3½" only $1.00 postpaid. Free information. Kay of Hollywood. 1315 Colorado. Los Angeles 41.

HOW to remove warts. Painless. Send $1.00 to Pereira. Box 846. Newport News. Virginia.

105 ADVICE

BALDNESS—can it be prevented? Booklet free. Vanguard Reports. 3009-L Military Road. Washington 15. D. C.

106 ADVERTISING

ADVERTISING Sensation! Reach 2,100,000 families. $32.90 inch. Display, classified, ratebook (newspapers, magazines, mailing lists), advertising assistance, free. Chicago Advertising Agency. 20-PS. West Jackson. Chicago 4.

24 WORDS in 64 Weeklies $4.96. J. Darnell. 730 Hays. Jackson. Tenn.

ADVERTISE: 24 words. 40 Newspapers. $3.50. Lists Free. Advertising Bureau. 229-P Dixon. Uniontown. Pa.

ADVERTISEMENT Writing! Powerful publicity, mailorder letters, literature, campaigns. Reasonable! National reputation, outstanding successes! Finkle Advertwriting. 1201½ South Ogden. Los Angeles 35.

108 GENEALOGY

TRACE Your Ancestry with "Guidex"! Literature 10c. Family Guidex. 5 Bulls Head Station. Rochester 11. New York.

110 TAXIDERMY

FINEST Glass Eyes; Taxidermy Supplies. Catalog Free. Elwood Company. Dept. 235. Omaha 2. Nebraska.

112 CONSULTING ENGINEERS

ANNOUNCEMENT: Managements! Businessmen! Homeowners! Do you require advice or assistance on managerial, technical, engineering or other problems? Are you finding difficulty in obtaining certain services, materials, equipment, etc.? Our correspondence consultation service will develop your requirements economically and ethically. We will report on your problem after receipt of details and $2.00 check or money order. Advisory Planning Letters. Box 17. Pelham 65. N. Y.

113 DRAFTING

SAVE on drafting materials. Free catalog. Draftsmen's Supply Co., 187 W. Madison. Chicago 2.

114 DRAFTING INSTRUMENTS

DRAFTING Templates, architectural, mechanical. Transparent plastics, accurate cutouts, simplifies drawing. Illustrated folder free. Timely Templates. Box 206E. Columbus 9. Ohio.

DRAFTING Machines, Gunsights, Motors, etc. War Surplus. List free. Siefke. Box 18. Station E. Buffalo 11. N. Y.

115 DRAWING & ART SUPPLIES

BEAUTIFUL art pictures. 40 for $1.00. Renfro. 2533 University. San Diego 4. Calif.

OPTICAL illusion: Makes drawing simple tracing. Bruce Enterprises. Dept. GE. North Hollywood. Calif.

117 TATTOOING SUPPLIES

TATTOOING Outfits, Supplies, Illustrated List Free. Zeiss. S-484 Lesley. Rockford. Illinois.

120 CANDY MAKING

MEN-Women—"Most Everybody Likes Candy". Learn to manufacture in a professional manner at home. (Our 38th year.) Ragsdale Candies. East Orange. N. J.

125 WOODS

CHRISTMAS cards of real wood. Write Cards of Wood. Manlius 2. N. Y.

WHITTLER'S Supplies. Redicut blanks, special woods, tools. Catalog 10c. Old Whittler. 1402 Charles. La Crosse. Wis.

129 MAGNETS

MAGNETS 2½ times stronger than Alnico 1. Terry Sales Company. Toledo 1. Ohio.

DOLLAR Magnet — Lifts 10 pounds! Ronald Eyrich. Box 849. Milwaukee 1.

131 TREASURE FINDERS

METAL Detectors. The Very Latest Circuit. Free Literature. Hedden Metal Detectors. 3329 Liberty St., Pittsburgh 1. Pa.

TREASURE Hunters! Radically new Goldak locators. New featherweight Model 101 weighs only 11 pounds! Revolutionizes location of Gold, Silver and Minerals. Money-back guaranteed superior any other. Write The Goldak Co., 1544 W. Glenoaks. Glendale 1. Calif.

M-SCOPE Metal Locator fully guaranteed and unsurpassed in efficiency. New featherweight models. Time payment plan. Free literature. Fisher Research Laboratory Inc., Palo Alto. Calif

SEEK Buried treasure; Methods, mysteries, devices explained. Circulars free. Century Press. Box 151-D. Glen Ellyn. Ill.

137 DETECTIVES

DETECTIVE Training. Phillips Secret Service. 1917C. N. Kenneth. Chicago 39. Ill.

DETECTIVES—Work home—Travel, Experience unnecessary. Write Wagoner P-125 West 86th. N. Y., N. Y.

142 INFORMATION

SOUTH AMERICA: Receive information unlimited opportunities, forwarding $1.00 registered. Morgens. Casilla 5025. Santiago. Chile.

WITHOUT sending money, promise: "Will not exercise cosmic consciousness power to injure anyone," becoming my student, receiving immediately $2.50 book for study. Learning scientific instantaneous healing and "success" demonstration. When fully satisfied demand next lesson. Failing satisfaction within month, discontinue study, return book, owe nothing. Otherwise, when satisfied, send check for book. Crane, Publisher, Kingsport 1, Tenn.

143 NAME LISTS

MAILING lists; most classes. 1000 $5.00. Free Prospectus. Dixie Service. King. N. C.

MAILING lists! Wide coverage. Bulletin free. Donner. Box 643. Ann Arbor. Mich.

NEW Customers—1,000: $3.50. Oliver Company. P.O. Box 565. Newport. R. I.

144 MILITARY INSIGNIA

BIG Campaign Ribbon Packet. Illustrated Book. $1.00. Insigniacraft. 236 28th Avenue. N.W., Calgary. Canada.

CLASSIFIED ADVERTISING ORDER

Popular Science Monthly • 353 Fourth Avenue • New York

Please insert the ad below in your.....issue.

Heading.....

Enclosed is $..... Word Count.....

.....

.....

.....

EACH WORD IN NAME AND ADDRESS MUST BE COUNTED AS A WORD

Name.....

Address.....City & State.....

SAVE UP TO 85% in WAR SURPLUS ... SENSATIONAL VALUES at "GADGETEER'S HEAVEN"

IN MANY ITEMS WE HAVE THE WORLD'S LARGEST SUPPLY

NEW HYDRAULIC CYLINDERS, VALVES, PUMPS, FITTINGS, HOSE & TANKS

51 sizes & types.
World's Largest Supply
1001 Labor Saving Adaptations for pulling, pushing, lifting operations. Finest precision workmanship and materials. Liquid and or air operation, developing terrific power.
20,000 Available WRITE FOR CATALOGUE
PRICED TO SELL AT 15% GOVT. COST.

PUMPS NEW HYDRAULIC, VACUUM, AIR

For every purpose at 15% of Value.

PV-1 Valve Type — May be used as air or fuel pumps for pressure or vacuum. Will pump 7½ gals. oil at 300 R. P. M. Builds air pressure 30 lbs. per sq. in. at 1500 R.P.M. Vacuum draws 26 in. of mercury at 1750 R. P. M. **$9.49**

ROMEC FUEL 800 GPM at 30 PSI. can also be used as hydraulic for 4 GPM at 400 PSI. or for Vacuum drawing 15 in. mercury at 1500 RPM. **$6.29** ea.

NEW PRESSURE TANKS

Stainless steel - Shatter proof. Rustless. 10,000 available in 6 different sizes. 1001 uses.

G-1	12½ x 34 Inches - 3200 Cu. In. capacity 20 ga. R.	$4.75
D-2	8½ x 24 in. - 960 Cu. In. capacity - 7 ga. R.	$2.49
F-1	10" x 10" 1200 Cu. In. Capacity	$3.95
F-2	9 x 10 in. - 1050 Cu. In. capacity 14 ga. R.	$3.95
A-4	5" x 8" 104 cu. in. Capacity	$1.35
A-5	5½" x 15" 190 cu. in. Capacity	$1.95

Excellent portable tanks for spraying oil in car or trailer. Ideal for painting, cooking, spraying, season boxes, underwater fishing or diving.
#GB-1 Oxygen Regulator with 500 lb. gauge will fit all tanks **$1.39**

DC GENERATOR 140 AMP NEW

Direct Current Generator, especially suited for adaptation to homemade welding unit.
A fast moving item at $15.95

P-1 GENERATOR 200 AMP $22.50 ea.
R-1 GENERATOR 300 AMPS. $29.50 ea.

HERE THEY ARE! THOSE TERRIFIC MIX VALUES

GADGET MIX #100 Especially prepared for the HOBBYIST. Screws, Spacers, Bolts, Screws, Nuts, Gears, etc. A gold mine. #101. 5 LBS. **$1.19**

BEARING MIX #170 Needle, Ball & Roller Bearings in excellent assortment. Sizes from ¼" to 3". One of our "BEST SELLERS". #170 for ONLY **$2.95**

HINGE MIX #170-H 12 pairs of strap and butt Hinges. Sizes 1" x 1" to 1½" x 4" in length to 8" sizes. #170H. A $3.00 Value FOR ONLY **$1.09**

ABRASIVE AND GRINDING WHEEL MIX #170-G 50 Pieces including honing stones, pencil rasli, wheels, Abrasive sheets, etc. A really sharp value. #170AG. **99c**

SPRING MIX #208 Torsion, Compression & Tension Springs, round, sizes. A treasure trove for amateur specialists. #208 ½ LBS. for ONLY **89c**

COMBO-MIX Combination of all above, all in one package deal. At special introductory price **$5.79**

WINCH HOIST

20 ft. ¼" Alloyed Steel Cable with Hook, mounting Frame 19" x 12" — Reinforced bearing Housings — Power — Value — 1" O.D. Alloyed steel tubular frame for versatile attachment. — Cable guide roller pulley for low sweeping stress.

now equipped with mounting frame, handle, cable, etc. complete.
Thousands of Satisfied Users! Hundreds have written, telling us it's the most wonderful tool in the world!
Capacity 2500 lbs. 36-1 ratio
Bronze Worm Gear
Ideal for Garages, Truck loading, Machine Shops, Boat Builders, etc.
$100 Value for ONLY **$16.99**

Gilbarco Gasoline Filter Funnel

12" Dia. x 18" high. Has fine wire screen cylindrical filter. Glass gauge for checking water accumulation. Drain cock for water removal, shut off valve for control of flow of filtered Gasoline. Complete with 1 brass 1½" x 2" x 18" long nozzle.
BE SURE OF YOUR GAS AIRCRAFT, TRUCKS, GARAGE
NEW $5.95

Plomb Snap-On Socket Set

NEW 6 SOCKETS 3/16, ¼, 5/16, 11/32, ½, 7/16, 2 in. extension, 6 in. extension, socket, Flashcode.
All in steel case. New. A $6. Value - for Only **$3.95**
2 in. extension. 6 in. extension.

Stewart-Warner Gasoline New HEATER

AIRCRAFT TYPE. New. 24V. 10 Amp., 60,000 B. T. U. Diameter 5 in. Length 15 in. Stainless steel housing. Complete with Spark plug, gas valve, Thermo Control Switch. Adaptable to trailer, Truck, Home, Boats, etc.
SW-1 A SWELL DEAL for ONLY **$6.95**

SW#2 HEATER A smaller Compact Car-like Gasoline fired heater with motor, fan blower, Automatic Thermo Switch, Copper element, glow type spark plug. Mfd. by Stewart-Warner. 24V D. C. — Can operate on 6 Volt. Ideal for Auto, Boats, Light Aircraft, etc. A Steal at **$5.95**

FIRE EXTINGUISHER

Eddie Lux Cell Fire. Built to Gov't. spec. wirebound shatterproof Heavy Case. Fully recharged. 3½ in. - 20" x 4" Trigger control with horn 470 type. 535 Value - #841A **$13.25**
2 lb. Cal type 833 Value #802 **$11.75**
10 lb. Charged with horn Cal 885 Value #402 **$25.75**
15 lb. Break Disc type New 875 Value #401A **$29.75**
15 lb. Wheel Control #601B **$32.95**
15 lb. Squeeze grip. New #606C. 885 Value **$39.95**
All above Cal type, fully charged and with horn. Indispensable for small or large planes, Trucks, Auto, Home, Factory, Etc.

Here's a Real "Lite Special"

Farm, Auto, New U. S. Navy Portable Pistol Grip. Sealed Beam. 12v. Search Spot.or Emergency. Light- featherweight Gov. Cost $35.00 our price
2 Extra filters - Red, Green & Amber 93c Set **$2.95**

New Electric Motors

#500 new ½ H.P. 27 Volt D. C. 24 Volt A. C. This motor can be readily adapted to 110 A. C. by the simple method of rearranging armature brush leads. We furnish free diagram of instructions with each order. A Sensational Value @ **$5.95**

Converted to 110 A. C. Equipped with plug and 3½ ft. Heavy Duty Cord **$8.49** ea.

1 16 H. P., 24 Volt D. C. Motor, Series Wound. New. #501. **$3.95** ea.
#502 - 2 H.P. 24 V D.C.M. used. **$8.95**
COMPRESSOR 1000 lb. pr., 2 stg. with ½ H. P. 27 V., D. C. motor. Tank and Fitting **$17.95**

NEW FLEXIBLE GOOSENECK LAMP

110 V. A. C. 13 ft. wire with socket, switch and plug. In mounting bracket suitable for home or workshop. Wire alone worth our price of **99c** each.

Vickers Hydric Transmission

VT-1 Self contained. 2 H. P. constant torque at all speeds with variable volume reversible, piston pump (controlled by outside lever) supplying piston hydraulic motor. Automatic pressure, dash pot for smooth control. Power output R. P. M. -0 to ½ input R. P. M. in both directions. Input R. P. M. 1800 continuous 4000 intermittent. Dash pot can be removed for greater R. P. M. Ideal for Lathes, Duplicator Setup on Mills, Conveyors, Small Cars, Drives, Gearing, Etc.
COST GOVERNMENT APP. $400.00
You'll Chortle when you get it for ONLY **$19.50**

NEW

4 INCH PAINTERS DUSTER BRUSH Only **59c** ea.

PEXTO PLIERS Side cutting beveled head or $3.50 Value Only **$1.79** #121

PLASTIC MALLET 16 oz. with 2" dia. 88° lip head. 12" handle. for soft metal or plastic work where fast pounding or tapping is desired. A $2.50 Value for Only — **79c** ea. PENTCO #1107

METAL SNIPS Compound action. Hard steel blades. Expansion spring. Locking device. Right Hand and Left Hand **$2.59**

PLASTIC PARALLEL STRAIGHT EDGE

with hooks and rubber pads for non slippage on each surface. A must for navigators, mechanics, draftsmen, engineers ... You've never seen "em at **98c**

PNEUMATIC AND AIR TOOLS

10,000 in various popular makes, sizes, types, Cleco, Aro, Ingersoll Rand, Chicago, Pneumatic, Buckeye, etc.

RIVET GUNS Pistol & Gooseneck Type #180 Gooseneck #181 Pistol — Chicago Pneumatic, Cleco, Ingersoll Rand Makes. Ex. Ex. 2X. 2X. OY $55 Value **$8.95**

#196 Squeezer — PNEUMATIC ALLIGATOR SQUEEZER $80 Value **$15.95**

AIR DRILLS OR MOTOR SPECIAL ARO PISTOL $15.00 with ¼" JCB Chuck Straight **$12.95**

PNEUMATIC ANGLE DRILL **$12.50** With Terry Adapter ea.

CHI. PNU. IMPACT WRENCH **$17.50** Model 237rs 3/8" sq. dr. fwrd. & revrs. & spd. cntrl.

Send for Catalogue and List of Other Sizes, Types of Pneumatic Tools.

HIGH PRESSURE OXYGEN BOTTLE

New. Will hold up to 3,000 lbs. PSI. with CO_2 used as tire inflator or fire extinguisher, with oxygen for sick room or deep-water diving, etc. Completely equipped with brass valve, 36" hose, dial gauge, & canvas bag ..... **$2.29** ea.

TANK

Capacity 21.7 gallons. Aluminum & threaded ports. Filler Capacity. Size 7" x 28" x 28". Ideal for Water or Gas Tank on Auto, Boat, Truck, Tractor, Etc. New. #126 **$5.29**

ELECTRIC SOLDERING IRON

#198 110 Volt A. C. Vulcan $8.50 Value
#198 200 Watt **$3.95**
#198A 100 Watt **$2.95**

AIRCRAFT CABLE

Alloyed steel, rust resistant. 5 16" dia. 18 ft. long, with turnbuckle ends. On reels in any length **99c** ea.

1/16"	3c ft.	5/32	5c ft.
3/32	4c ft.	3/16	6c ft.
1/8	4½c ft.	9/32	8c ft.

RUBBER GOODS

NEOPRENE SHEET RUBBER

	Thick. ness	Width	Price per zone 1-6
#225	.020"	1/64	36" .75
#226	.037"	1/32	36" 1.00
#227	.064"	1/16	36" 1.75
#228	.125"	1/8"	48" $4.75

Item #229 is laminated rubber sheet with cloth center. Flexible but very fine for heavy wear.

Order Direct from this ad. All Sales Final. Pay by Money Order or Check. P. O's accepted from Dun & Brodstreet firms. All prices F. O. B. Los Angeles. ½ Deposit with C. O. D's. FREE ILLUSTRATED CATALOG

PALLEY SUPPLY CO. THE LARGEST FIRM ITS TYPE OF IN THE WORLD

P. S. 9-8 — 6321 SAN FERNANDO RD. GLENDALE 1, CALIFORNIA

Amazing New Invention

NOW AVAILABLE FOR THE FIRST TIME

EVERYONE NEEDS THIS HANDY

12 IN 1 VEST POCKET TOOL SHOP

For Only $1.00 (SOLD ONLY BY MAIL) POST PAID

ORDER SEVERAL ...
- For the office
- For your kitchen
- For your car
- For your pocket
- For your work shop

2 for $1.75
3 for $2.50

OVER 1000 USES for this handy 12-in-1 tool that slips right into your vest pocket. Why be bothered with pockets bulging with tools? Now you can find every handy household essential you need, simply by reaching into your vest pocket. Think of it . . . TWELVE precision engineered tools, made by one of America's foremost electronic manufacturers, all combined in one smartly styled, lightweight unit. Get yours before the sell-out. Mail only $1 today!

Mail $1.00 with name and address to:
THE POCKET WORKSHOP, Dept. K
32 North State St. Chicago 2, Ill.
No orders accepted after February 1, 1949

BE FAIR TO YOUR HAIR Want better looking hair? Embarrassed by falling dandruff, itching scalp? Then try VITABRUSH, new electric driven scalp brush that gives your scalp a vigorous and invigorating "workout" in just three minutes of fun. Cleans scalp. Stimulates blood supply. Restful. Pleasant. Write *today* for complete information and satisfaction-guaranteed offer.
Hershey Mfg. Co., 169 S. La Salle St., Chicago 3

Original
HOLLYWOOD WOLF WHISTLE
CAR HORN

You, too, can become a Hollywood Wolf. Give the wolf call and make other weird noises with the original HOLLYWOOD WOLF WHISTLE on your car Precision made. Works off the intake manifold Easily installed in 15 minutes. Works in trucks, motorcycles, motor boats, outboard motors, too Guaranteed If your dealer cannot not supply you, order direct, giving us your dealer's name. No COD's or stamps. No individual foreign orders AUTOMOTIVE DEALERS & JOBBERS write for information on this fast selling, proved item.

DESCRIPTIVE LITERATURE ON REQUEST

YODER MFG. COMPANY
2403-41J East 103rd St., Los Angeles 2, California

MAKE YOUR OWN RECORDS with RISCO 3-way Home Recorder

"Snapshots in Sound"

Over 10 minutes recording on a 10" record at dual speed—4½ min. at single speed.

- High fidelity record player
- An auxiliary P.A. amplifier
- Uses professional recorder

Ready to operate with 6" spk. crystal mike. Ideal for music lessons, parties, your child's cute sayings—Speeches, Churches.
Attractive Portable Case
SEND FOR COMPLETE DETAILS

$49.50
$5 EXTRA FOR DUAL SPEED

SAVE MONEY AND COPY YOUR FRIENDS RECORDS
RECORDISC RECORDING BLANKS

Base	6½ in.	8 in.	10 in.
Bond	9¢	15¢	21¢
Aluminum	18¢	24¢	36¢

We Sell Retail
Steel Styli Cutting Needle, 3 for 79¢. Tungsten tipped, 5,000 Playback Needle, $1.00.
25% on COD orders—ORDER FROM THIS AD

Wholesale Distributors **RISCO ELECTRONICS** 25 W. Broadway, N. Y. 7, N. Y.

DUMORE Duplex Grinder Makes work faster, easier, twice the fun!

Do *more* in metal, wood, and plastics! A Duplex gives you extra power, chucks three different tool sizes, converts for flexible-shaft, bench, or lathe work. It's a honey.
Write for Free folder.

The Dumore Company, Dept. J-52, Racine, Wis.

PILOTS' JACKETS

(Right) **B-15 STYLE BOMBER JACKET.** Sturdy water repellent mountain cloth. Warm fleecy all-wool lining. Genuine Mouton Fur (Beaver-dyed Lamb) collar and chin strap. 34-46 . . . . . $12.95
REGULATION B-15 JACKET. Made same as for AAF. Heavy alpaca wool pile lining throughout. 34-46 . . . . . $16.95
CAP (illustrated). O.D. wool outside, alpaca pile flaps $1.25
(Left) **A-2 STYLE JACKET.** Soft, pliable brown leather. 34-46 . . . . . $17.95
A-2 Jacket, Mouton Fur Collar $21

Write for FREE illus. list clothing. Orders sent postpaid except C.O.D. Satisfaction or money back.
CONSUMER'S CLOTHING CO. Inc., Box 5, 20 Greene St., New York 13, N.Y.

POCKET OR PURSE SIZE RADIO!

SMALL AS A PACKAGE OF CIGARETTES Wt. only 4 oz.—**BEAUTIFULLY** molded silver black case. **NO TUBES—BATTERIES OR ELECTRIC "PLUG-INS" NEEDED!** Uses **NEW Type** fixed power crystal diode. ONE YEAR SERVICE GUARANTEE.

GUARANTEED TO WORK on local stations if used as directed. **Listen at home, in cabins, in bed, on farms, hotels, offices—most anywhere.** L. S. of Texas says "It's Wonderful".

SEND ONLY $1.00 (bill, money order, check) and pay postman $2.99 plus C.O.D. fees on arrival or send ONLY $3.99 for postpaid delivery. **Complete—Ready to play! Marvelous gift for children or grownups; Bargain priced! Order your Pakette Radio now!** (Foreign $5.00 U. S. Cash).

MIDWAY SALES COMPANY, INC., Dept PTS-9, Kearney, Nebr.

Say You Saw
It In Popular Science

6 POWER TELESCOPE

$1 WE PAY POSTAGE

Here it is! . . . just in time for Fall and Winter fun outdoors! Beautiful 6-power Telescope . . . and at an amazing low price! NOT A TOY! Sturdily built of tough, ebony-like plastic. A beauty to look at—a thrill to look through. See the moon SIX TIMES LARGER than with the naked eye. See birds, wild life, scenery UP CLOSE from miles away. A once-in-a-lifetime buy! Order today! **SEND NO MONEY!** Just send name and address. Pay postman only $1.00 plus postage on delivery. We pay postage if you send a dollar bill. Hurry! Quantities limited . . . order now! Money back in 10 days if you're not delighted!

ELLIOTT PRODUCTS, Dept. 119, 2906 Fullerton Ave., Chicago 47, Ill.

EXTRA! Beautiful, leatherette carrying case. Protects scope from rain, dust, dirt. Makes it easy to carry anywhere. Yours WITHOUT EXTRA COST if you order right away!

WOOD CARVING and WHITTLING
AN ARTISTIC HOBBY FOR ALL

This new manual shows you how to do every kind of wood carving. How to carve jewel boxes, picture frames, trays, chests, furniture, etc. How to do chip carving, level surface carving, incising, carving in relief. Carving human and animal figures in the round completely explained and simplified. 256 Pages. Fully illustrated.—full cloth bound. Send only $2.00 and your copy will be sent postpaid, or order COD plus postage if you wish. *Money back if not satisfied.*

Popular Science Monthly — Dept. 98
533 - 4th Ave. New York 10, N Y.

AIR AND LIQUID TANKS

at New Low Prices $3.59 f.o.b. N. C., Mo.
WHY PAY MORE!

Non-rusting stainless steel; 10 gallons liquid capacity; 12" diameter, 24" length. Holds up to 400 pounds safe air pressure. Ideal for water supply in home trailers, bottled gas, air horns and brakes, floating rafts, buoys, compressed air. No operating cost; fill free at any filling station. Price list of accessories (air hose, gauge, fittings) on request.

MIDWEST BUY-ANYTHING CO.
Not Connected with Firms of Similar Names
Dept. 5, 1520 Locust Kansas City, Mo.

LEARN RADIO BROADCASTING
THIS PROFESSIONAL WAY
Actual Broadcasting Materials Supplied You in Your Own Home
AM—FM—TELEVISION

Train with America's foremost school of broadcasting. Fascinating field, good pay. Training in preparation for professional productions, and for teachers, club members. Broadcast stations need qualified people. You receive actual equipment in own home including microphone, recordings, scripts, etc. You may follow home study with instruction in our Chicago Studios. Send for **FREE FACTS** today. No Obligation.

BROADCAST PRODUCTIONS, Dept. PS-9
25 E. Jackson Blvd. Chicago, Ill.

DO FILING LIKE AN EXPERT
with this new interchangeable
MASTER FILE HANDLE

FITS ALL FLAT TANG FILES—NO MORE BRUISED FINGERS

Scientifically designed for smooth, fast filing. Rugged solid aluminum with inverted pistol grip handle that takes any size flat tang file from 6 to 14 inches long. Gives you the right grip for tireless level filing. Change files instantly. Mechanics swear by it—on the farm—in the tool room or home work shop it's a real short cut to better work. **Postpaid in U.S.A. ea. $1.25.**

L. J. MICHLES CO. • P. O. Box 96 • Progreso, Texas

Bring Electrical Troubles "TO LIGHT" with
BRACH TEST-O-LITE

The NEON glow enables breaks, poor contact, shorts, and defective electrical units to be located quickly in all circuits of 100 to 550 volts . . . indicates hot or grounded wires . . . tells AC from DC (and polarity).

Here's the ultra-convenient, time saving, modern tester for fuses, cut outs, radios, appliances, motors, outlets. Far superior to the ordinary, clumsy bulb. Operates one hundred per cent even on very minute current.

The only pocket-size tester with Patented Safety Feature. Guaranteed for a lifetime.

95c at your local electrical dealer . . . or send $1.00 to cover purchase price, mailing and handling.

L. S. BRACH MFG. CORP.
200 Central Ave. Newark, N. J.

Learn Screen-Art Printing

Easy, Fascinating, Profitable

Start your own business personalizing book match covers, napkins, coasters, ash trays. Print signs, Xmas cards. SCREEN-ART Kits show new, easy technique.

Complete Outfit Postpaid $4.95

—includes everything needed to learn and produce Screen Art printing professionally. Send check or money order . . . No C.O.D.

SCREEN-ART KITS P.O. Box 581 Akron, Ohio

New ARMY MINE DETECTOR

AN/PRS-1 is a portable device for detecting Metallic and Non-metallic objects. You can use them to ferret out all kinds of Buried-Treasures, in the Mountains or on the Beaches. Its private use suggests the following: In the hills or mountains, all types of Metals and Non-metals; on the beaches any type of objects such as jewelry and coins. For commercial use such as tracing buried cable, wire and sewer tile. Locating buried metal or wooden boundary stakes, etc.

TECHNICAL FEATURES:

This unit actually is a Ultra high Frequency transmitter. A variation in radiance resistance, caused by any change in soil density, shows in a deflection of the Microammeter, discriminating between Metallic or Non-metallic objects by a swing to the right or left. Audio response in the Headset also indicates changes by an increase or decrease in the volume of the 1000 cycle tone. By lengthening dipole rods operator will be able to increase the depth sensitivity.

This unit comes complete with spare tubes, antenna dipole and reflector, and instructions manual, in wooden chest 9½" height x 28¼" length x 15½" depth. Weight in operation is only 22 lbs. LESS Batteries. Power supply: Three 45 volt and one 6 volt batteries. Uses standard batteries. Original COST $285.00. Shipping Weight appr. 80 lbs. F.O.B., N. Y.

Our Special Price $26.40 with battery
$17.50 without battery

No C.O.D.

***Send Orders to:* COLUMBO TRADING CO., INC.**
304 Canal St., Dept. P.S., N. Y. 13, N. Y.

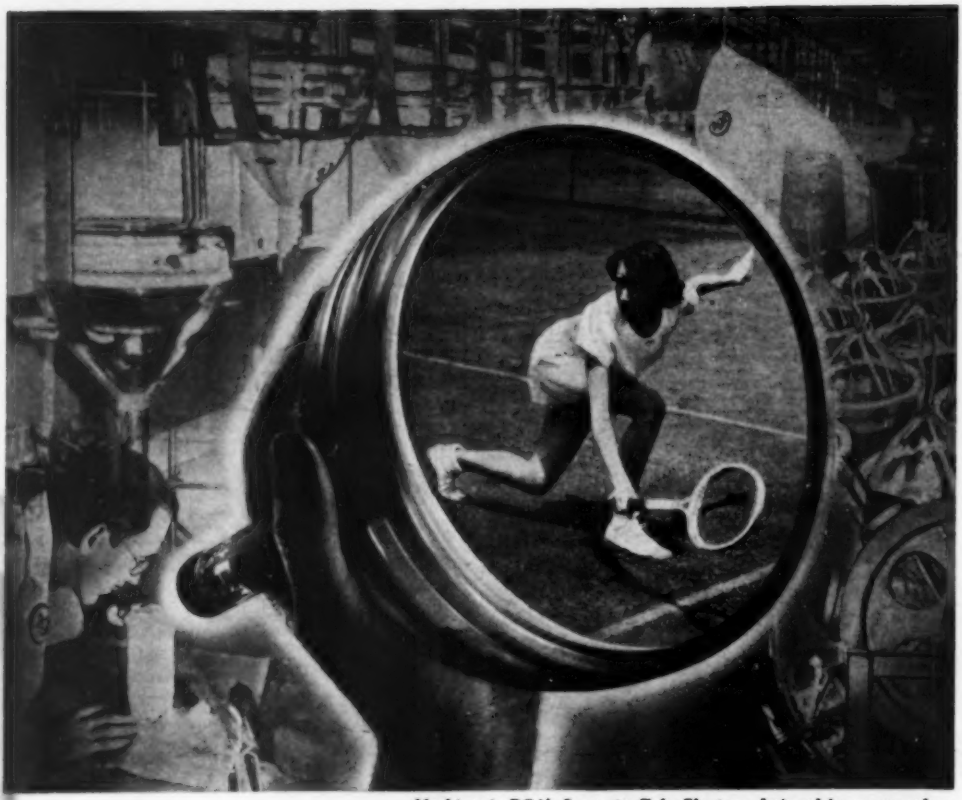

Machines in RCA's Lancaster Tube Plant are designed for mass production of Kinescopes—television picture tubes—at lowest possible cost.

Behind the magic of a Television Tube

Every morning, 14 tons of glass "bulbs" go down to the production lines at the RCA Tube Plant in Lancaster, Pa.

By evening, the bulbs are television picture tubes, their luminescent faces ready to glow—in television homes everywhere—with news, sports, entertainment, education, politics.

Born of glass, metals, chemicals, the picture tube comes to life through flame and heat. Its face is coated with fluorescent material—forming a screen on which an electron gun "paints" moving images.

Each step is so delicately handled that, although RCA craftsmen are working with fragile glass, breakage is less than 1%.

Water, twice-distilled, floats the fluorescent material into place on the face of the tube, where it clings by molecular attraction—as a uniform and perfect coating.

Every phase of manufacture conforms to scientific specifications established by RCA Laboratories. Result: Television tubes of highest perfection—assuring sharp, clear pictures on the screens of RCA Victor home television receivers.

• • •

When in Radio City, New York, be sure to see the radio, television and electronic wonders at RCA Exhibition Hall, 36 West 49th Street. Free admission. Radio Corporation of America, RCA Building, Radio City, New York 20.

RADIO CORPORATION of AMERICA

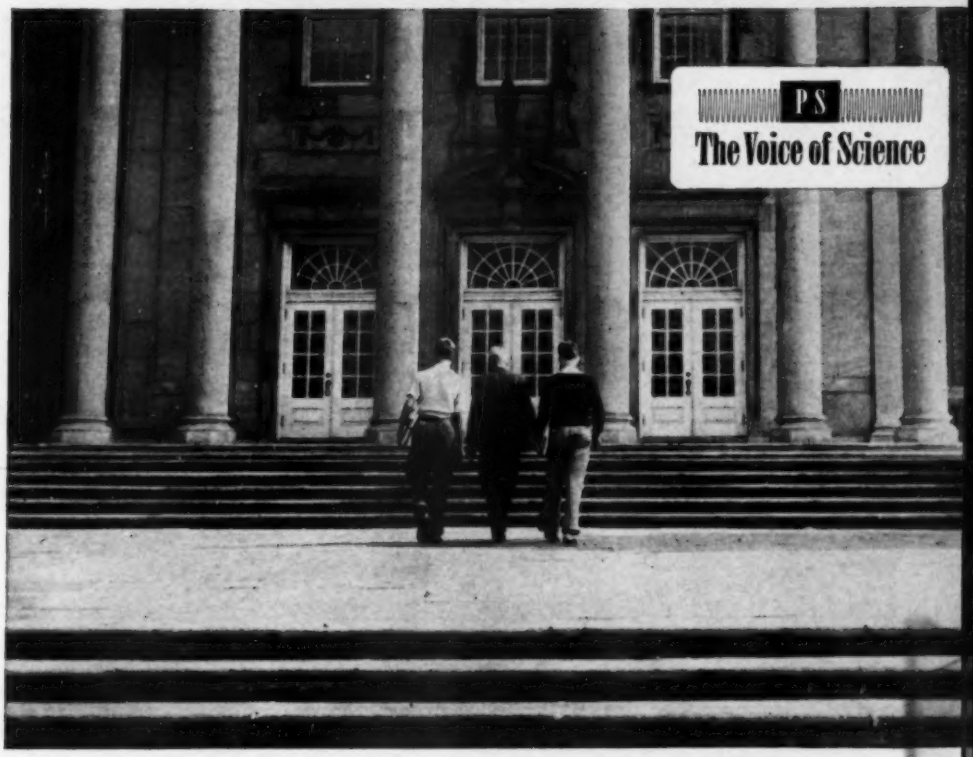

Let's All Go Back to School....

THIS is the month the kids go back to school. It's easy, now, to think of education as the business of youth. But if you think so, tune in the nearest quiz program.

The answers to the simplest questions can make adult ignorance amusing. Yet it isn't really funny that plenty of parents know less about geography than their children. That so many of us with a bank balance have trouble with checkbook arithmetic. That so many drivers misunderstand automotive physics, let alone the nuclear variety.

The laugh, if any, is on us. Because there never was a time when public understanding was more vital. Geography and physics are getting to be a very personal, as well as political, affair.

It would do us all good to go back to school. Not as pupils to clutter up the crowded classrooms, but as visitors taking a quick refresher course in the scholastic attitude. To rediscover that education is a *process* that never ends.

An hour in the back of the room might inspire many to continue the process. To be sure, your education didn't stop cold with your schooling. Books, museums, and magazines (like this one) have had their effect. But how much do you know of the programs for adult education in your own community?

Your local high school may have evening lectures in art or atomics more entertaining than plenty of movies. Most big cities offer opportunities that cost little more than your time. Many small towns have discussion groups—and the healthy argument that lubricates learning. Modern correspondence courses are tailored to most usual and some unusual interests.

Certainly you will find that education for grown-ups is more fun than you realized. Who knows—you might even win a prize on a quiz program!

Perry Gilbreath

IN AN F-80 BUILT FOR TWO

THIS is the TF-80C. Like its fighter counterpart, the F-80, it is fast, sleek, jet-propelled. But there is one important difference. *The TF-80C is a two-seater!* It's a trainer-fighter (TF) — the Air Force's first "jet" fully equipped for both instructor and student.

The new "Shooting Star" trainer will help speed jet training for Aviation Cadets. Instead of the usual "build up" in propeller-driven fighters, the student will be able to begin jet training as soon as he completes basic training. It means a safer, more interesting training program.

The TF-80C is powered by the same engine and has the same general features as the standard F-80B. The fuselage, however, is three feet longer and contains two completely instrumented cockpits. The instructor sits in the front seat, may switch off the dual controls in the student's cockpit at any time.

Young men who choose careers in the U. S. Air Force share in the training advantages of projects such as this. You'll have a chance to learn more of these benefits on Air Force Day—September 18.

Attend the Air Force Day events in your community or at your nearest Air Force Base. It will be a good opportunity to find out about the Aviation Cadets. Learn how you can qualify and make an appointment to take your examinations for pilot training.

U. S. Army and U. S. Air Force Recruiting Service

★

AIR FORCE DAY IS SEPTEMBER 18, 1948

★

AIR POWER US AF IS PEACE POWER

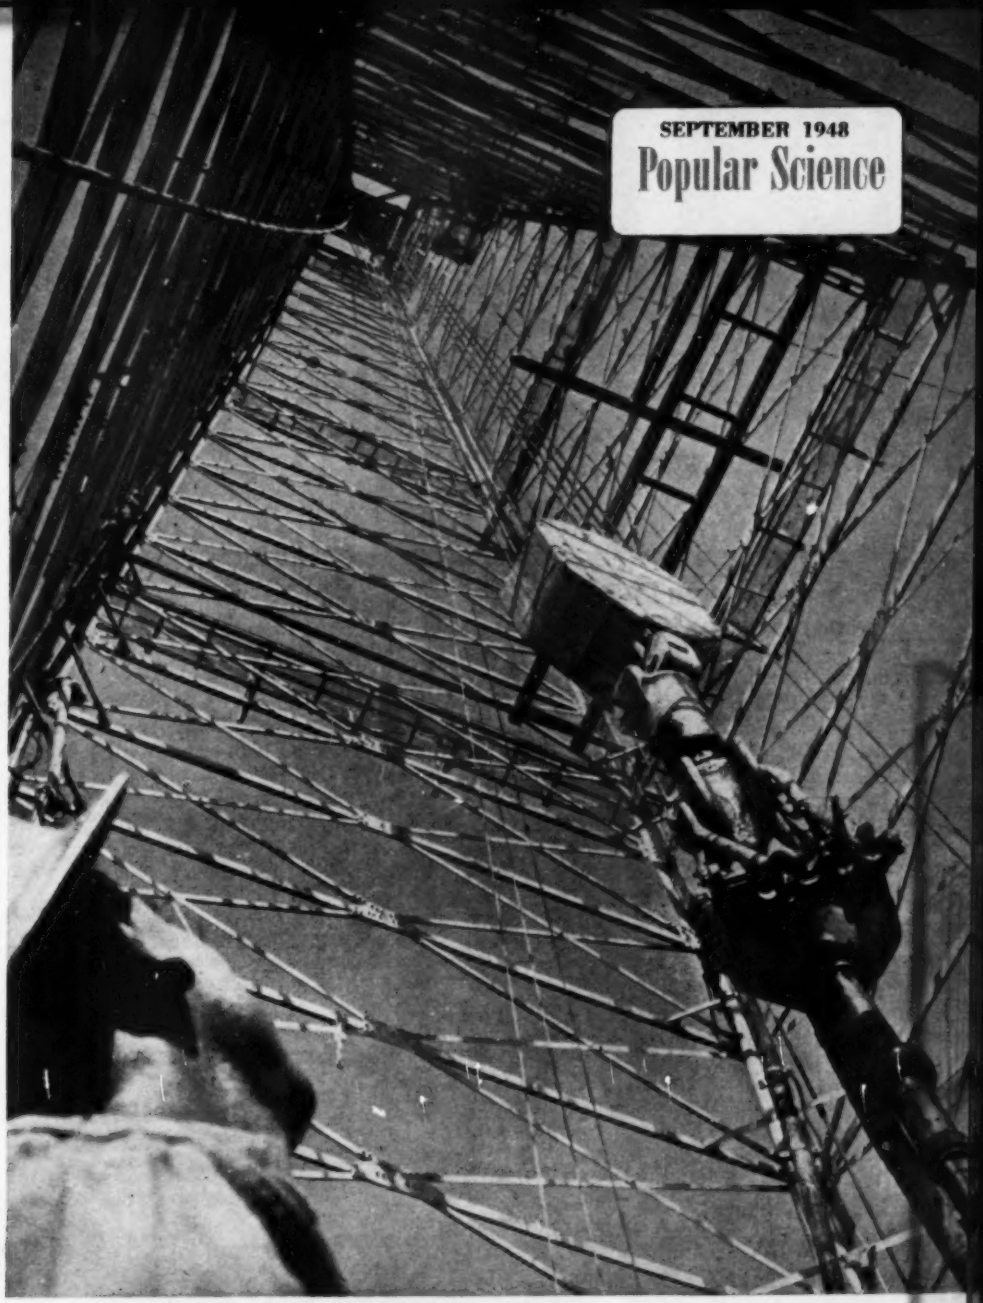

Inside Looking Up . . . It's 18 stories to the top of the web of steel forming the world's largest marine oil rig. Mounted on a movable barge, the derrick speeds up drilling of underwater wells to a depth of 18,000 feet. Main advantage of the rig's towering 186 feet is faster and easier handling of the 18,000 feet of drill pipe that can be accommodated in its racks. Capable of lifting nearly a million pounds, the derrick is so big that the operators keep in touch over an intercom system. Its 5 boilers generate 2,250 hp.

Cover by Reynold Brown

How Dual-Fuels Pep Up Cars

By R. P. Stevenson

"Octane overdrives" save high-test gas by giving engines peak power only when needed.

YOU'VE been wasting gas. No matter how lean your mixture or how gently you tap the throttle, part of your gasoline dollar has been dribbling uselessly out of your exhaust pipe.

It's not your fault. It's simply that even the best auto engines now made don't take full advantage of the fuel you feed them. They need high-octane quality only a fraction of the time, yet they burn the extra quality all the time.

This wasted *quality* didn't matter when gas was cheap and quality was plentiful. But gas costs more and more. And increased demand—not only for gasoline, but for Diesel and fuel oils—has put a limit on the amount of high-test gas that can be made.

Auto engineers will tell you that engines with almost double present compression ratios are a very practical dream. They offer both efficiency and economy. But the trouble

Fill 'em both up! If dual-fuel systems become common, the tank would be divided. High-test gas would go in small part, regular in the other.

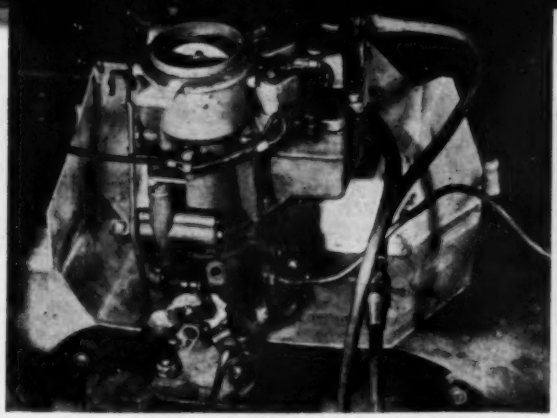

A two-bowl carburetor was developed for the dual-fuel experiments. Here it's installed on a Socony-Vacuum test car. A sheet-metal heat shield prevents vapor lock from exhaust heat.

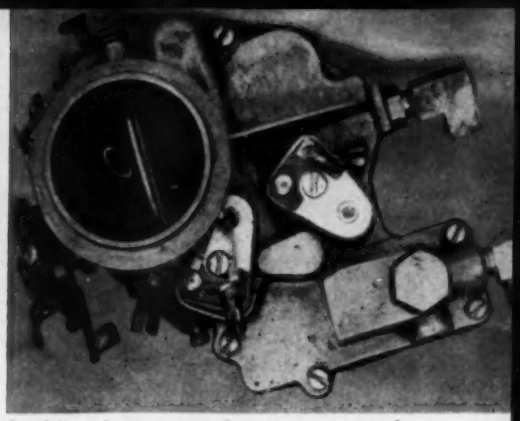

Looking down on carburetor, you see low-octane inlet at right, the premium inlet above it at upper right. Below circular air horn is solenoid that helps change from one gas to other.

will be to get enough 100-octane to feed them. One such super-engine with a rumored ratio of 12 or 14 to 1 has already been cut to 9 to 1.

Any increase in compression above the present top ratio of 7 to 1 can't come too fast. In the past, it has cost the refining industry millions of dollars to add a single octane number to gasoline. Today costs are even higher. To boost production of premium gas above the present 85-octane also means more steel and crude production.

These are the conditions that have forced some brand-new thinking in automotive circles. Right now, refiners, carburetor and car makers, fleet operators, and others are testing developments ranging from dual-fuel systems to economy gadgets that can be hooked onto present cars.

Some of these developments will have to be engineered into cars not yet designed. Others are now in use in limited areas. All have one thing in common: a way of keeping an automobile on a low-calory diet by giving it a shot of pep only when pep is needed.

When you first start up, when you are going up hill, when you step out on the level—these are the only times your engine really needs the extra octane numbers it gulps all the time. Under average driving conditions, these peaks total only a fifth of the time the engine is running.

A dual-fuel system solves this problem automatically. You don't do anything but step on the gas. No push-pull, no switch-twist. The Socony-Vacuum experimental car I drove looked—and acted—like any other of the same make. But under the hood there were two complete gasoline systems, ending in a double-bowl carburetor that squirted high- or low-octane through a common jet.

Lights Tell What's Happening

Mounted on a special panel on the dash were two small lights, one green and one red, with a vacuum gauge between. The lights were wired so the green would glow when the engine was using low-octane, red when it was getting premium.

When the motor was started, the red lamp came on briefly, but soon gave way to the green. The red took another turn as I accelerated for the getaway—but not for long.

Very soon we again had the green light, the low-octane indicator, and it remained

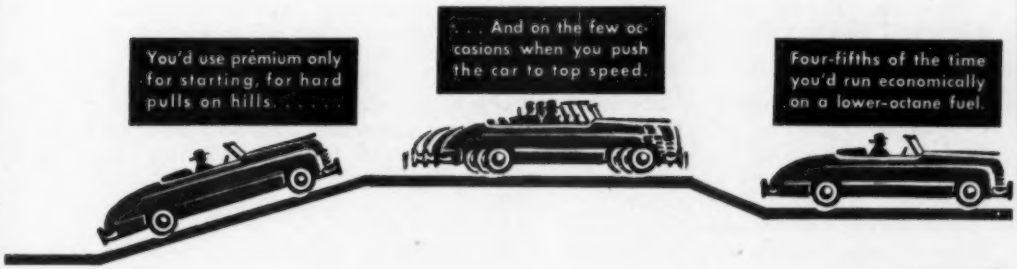

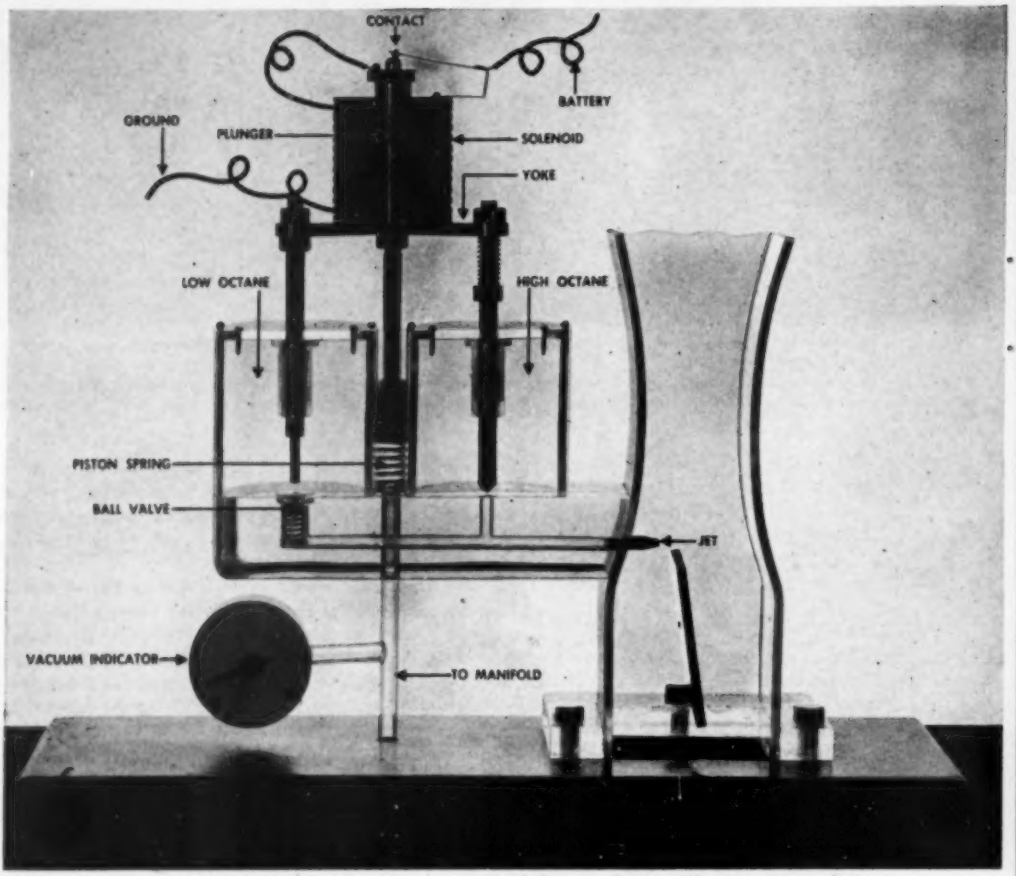

This schematic model indicates basic parts of the two-bowl carburetor. An accelerating pump that feeds fuel from the high-octane bowl was omitted for simplicity. The vacuum indicator is merely for illustrative purposes. For operation of the carburetor, see the facing page.

shining as we drove a mile or so at normal cruising speeds.

Then I began putting the system through its paces. After slowing almost to a crawl, I abruptly stepped on the accelerator. The vacuum-gauge needle swung toward zero and the red light came on.

Alternately slowing and hitting the accelerator, I soon had the vacuum needle in a crazy dance and the red and green lights winking.

But the engine performed perfectly. When it demanded high-octane gas, it got it. When the lower grade was all it needed, the engine was satisfied. There was no confusing the system. It seemed almost human.

Both Socony-Vacuum and Ethyl Laboratories are experimenting with dual-fuel systems. Results will be turned over to the manufacturers for possible incorporation in the new models you'll be buying a few years from now.

Eventually, if this program works out, you'll drive your new car up to a double pump. The attendant will stick two hoses into your double tank. And for every four gallons of ordinary gas a gallon of premium grade will be delivered.

The heart of the dual-fuel system is a double-bowl carburetor designed by Carter. Up to now, carburetors have been beautiful little machines for precisely measuring out the *quantity* of gasoline demanded by conditions. The new carburetor adds the new dimension of *quality*.

To illustrate the ingenious mechanism by

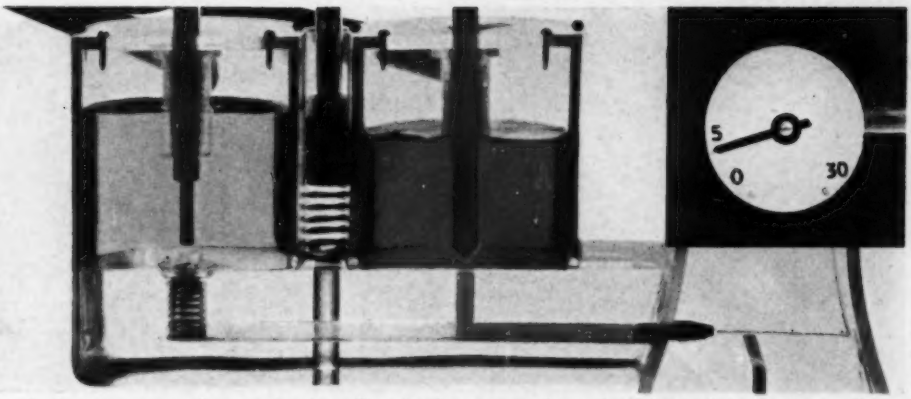

At low vacuum, when engine is pulling hard, spring has shoved up piston, plunger has closed solenoid contact, and this magnetized coil has snapped up the valve yoke. As shown above, this lets ball valve (left) close and opens needle valve (right). High-octane fuel now feeds engine.

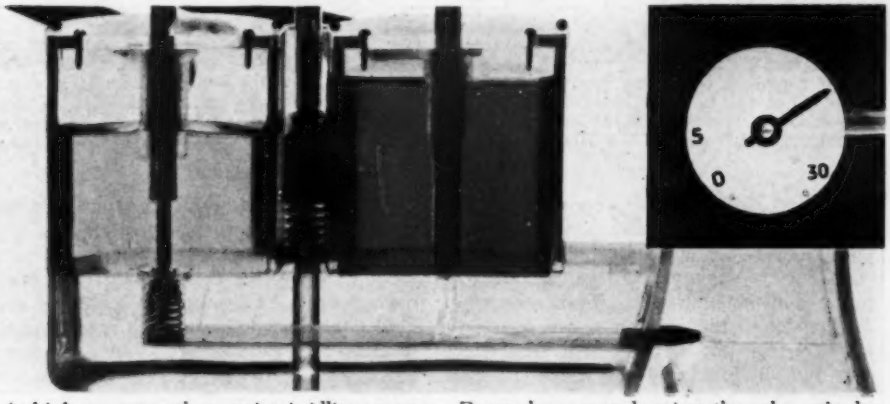

At high vacuum, when engine is idling or running at part throttle, downward pull on piston has overcome spring, opening solenoid contact. Drawn by a second spring, the valve yoke has now dropped down. As shown, this shuts off high-octane (right) and admits the low (left).

which the carburetor shifts from one grade of gas to the other, POPULAR SCIENCE made and photographed an animated model of plastic and brass. Keep your eye on the pictures while we see just how this two-fisted fuel system works.

The changeover from one fuel to the other is instantaneous. A solenoid and a vacuum-operated piston, acting against a spring, do this part of the job. The tension of the spring determines at what manifold vacuum the change will take place. The manifold vacuum is low when the engine is working hard, and high when it is under no strain.

While the engine is stopped, there's of course no vacuum at all. This allows the spring to shove up the piston, closing a contact that leads to the solenoid.

As soon as the ignition is turned on, this solenoid is energized. It immediately draws up a metal plate, opening the high-octane valve and closing off the low-octane.

The engine starts and runs briefly on high-octane.

The predetermined changeover point is reached when the manifold vacuum pulls harder than the spring pushes. The piston is then drawn down, opening the low-octane valve and simultaneously closing the other.

During idle and part-throttle operation, the engine continues to use low-octane fuel.

Then perhaps you come to a steep hill—or step down hard on the accelerator for a quick pickup.

As the vacuum drops below the changeover point, the piston is pushed up by the

Water injection is another way of conserving gasoline quality. In Cleveland, Yellow Cabs are now making a wholesale test of the Vitameter Ⓣ, an injector developed by the Thompson Products Co. Above, the 5-qt. tank of a cab is being filled with Vitol Ⓣ, an alcohol-water solution that's used in the injector. You'll be able to buy antiknock Vitol soon at gasoline stations.

spring and closes the magnetic-coil contact. The low-octane valve closes and high-octane feeds to the engine.

In Socony-Vacuum's test car, an electric pump delivers high-octane from a temporary tank, and the existing pump and tank are used for low-octane. In a production car, the dual-fuel system would have a double fuel pump.

There's another way of shooting octane numbers into an engine for peak demands that is now being tried out. This method injects water or a water-alcohol solution into the fuel mixture.

Since last April, Yellow Cabs have been running around Cleveland on 58-octane gas. Under their hoods is an injector flamboyantly named the Vitameter Ⓣ but engineered and manufactured by Cleveland's conservative Thompson Products—makers of valves and donor of aviation's Thompson Trophy.

It has long been known that a water-

Vitameters, right below, are mounted, as shown at left, by means of a flange that fits between the carburetor and intake manifold. Notice the filter bowl in the line running from solution tank.

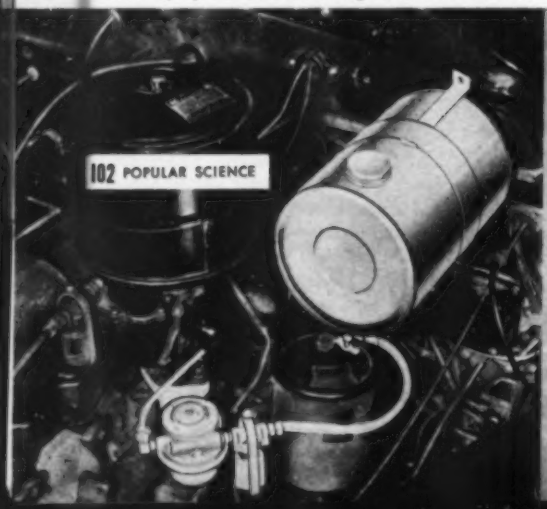

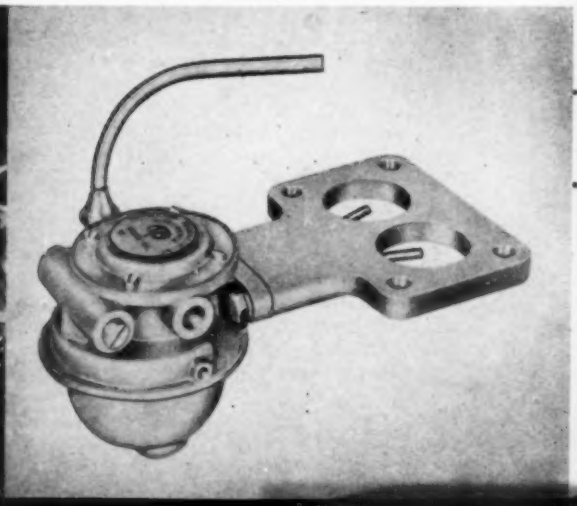

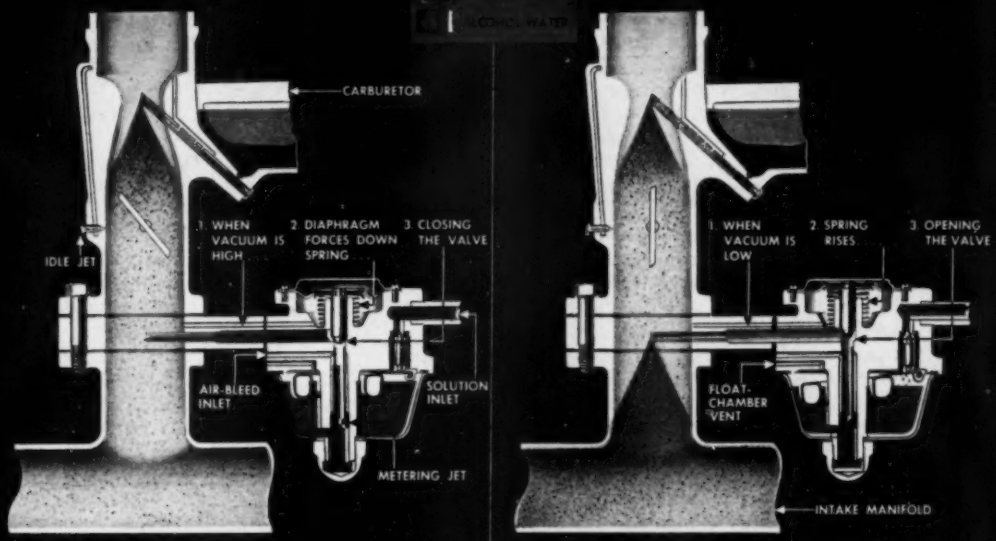

How Vitameter works. Manifold vacuum determines when injection will occur. You've often noticed that a windshield wiper slows down or stops when vacuum drops during times of full throttle. At these periods, the engine needs injection to prevent knocking. Because vacuum is low, the spring can open the valve. Spring tension is adjustable for different engines.

moistened fuel mixture gives an engine more pep. You've probably noticed this on rainy days, when the air that mixes with the fuel is moisture laden.

By keeping down the temperature of the explosive mixture, injected water promotes a more even explosion and prevents detonation—the annoying knocking or pinging that comes from your engine when it's pulling hard.

With injection, you can use lower-octane gas and still have no knocking. That's why the Cleveland cabs get by with a gas that stands at only 58 in the octane scale.

Gives Pep When Needed

The Thompson Vitameter is engineered to inject a water-alcohol solution only when your engine needs the pep this injection can give. In effect, it is another carburetor. Anti-knock fluid, held in a float bowl, is metered into the air-fuel mixture as needed. Once again, it's the intake manifold vacuum that determines when injection will occur.

If the engine is idling or operating at low throttle, high manifold vacuum closes the main valve and no fluid flows. As the throttle is opened wider, a diaphragm spring overcomes the slight force then exerted by the low manifold vacuum. The valve opens, allowing fluid to be injected. The point at which this occurs can be varied by adjusting the spring tension. Interchangeable jets of different sizes regulate the amount injected.

Thompson engineers report that injection has the effect of adding 10 to 20 octane numbers to the fuel that's being used. This opens up three interesting possibilities.

How Injector Can Be Used

When the proposed new high-compression engines appear, you could install a Vitameter and still use the present premium gas. This was demonstrated at a recent meeting of the Society of Automotive Engineers. The engine of the demonstration car had been souped up to a 9-to-1 compression. Normally, it would have required 100-octane fuel for knock-free performance. Yet with the Vitameter it showed no detonation on premium gas of about 85-octane.

Or take the case of a current car that requires premium gas. By installing an injector, you could use the more economical regular grade and raise its 76-octane rating well above the premium level. Besides economizing on gas, you would get all the other advantages claimed for injection.

Again, if your car operates satisfactorily

on regular gas, you could install an injector and use a fuel of still lower octane rating. This means little to the average motorist, since refiners agree that it would be economically unfeasible to make a third grade of gas available at all service stations. But commercial fleets could buy third-grade fuel in tank-truck lots.

In fact, the Thompson company proposes that the big refiners supply fleet operators a special low-octane, straight-run gasoline to be known as Vitane ⓣ. That's what the Cleveland cabs are using. Such gasoline can be produced at considerably less cost than cracked, blended, or reformed fuel—the type now available at gas stations.

Special Fluid Prevents Knocking

It's expected that gasoline stations will handle a special antiknock fluid to be used in the Vitameter. This will sell by the quart at about the price you pay for motor oil.

Called Vitol ⓣ, the fluid consists of about 85 percent alcohol, 15 percent water, with 3 cc. of tetraethyl lead per gallon. It also has an inhibitor to keep rust from forming in the carburetion system.

Vitameters and Vitol will be available for passenger cars this year in part of Ohio. The territory will expand from there as rapidly as a supply of Vitol and service instructions can be made available. For most of the United States, this may not be before late in 1949.

Road tests in recent years have revealed some surprising results concerning octane requirements at different speeds and throttle openings. Both the Vitameter and dual-fuel system are based on these results.

Here's an example:

With the spark set for maximum economy, the experimenters found that fuels of only 20 to 30 octane number gave knock-free operations at low speeds on level roads.

Even at 60 miles an hour at half-open throttles, a 45-octane gas was satisfactory. But for so-called "full-throttle" conditions—starting, hill climbing, and top speeds—the same car had to be given a 75- to 85-octane gas for satisfactory performance.

Dual-fuels are still in the experimental stage. Before they become a part of the package of transportation called "your car," they will have to meet the standards of volume production. The last hurdle will be, as always, testing in use by the public.

But as compression ratios creep upward, the need to conserve the limited octane numbers in every barrel of crude will push the development of dual-fuels.

You may be saying, "Fill them both up!" sooner than you think. END

Injectors on Market Give Power as Needed

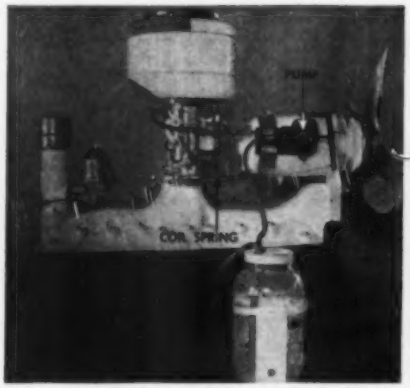

Hydro-Jector ⓣ. Made by Associated Laboratories, Cleveland, it pumps a shot of water into carburetor each time you press gas pedal. If you then keep pedal steady, a coil spring, linked to throttle, relaxes in a few seconds and injection stops.

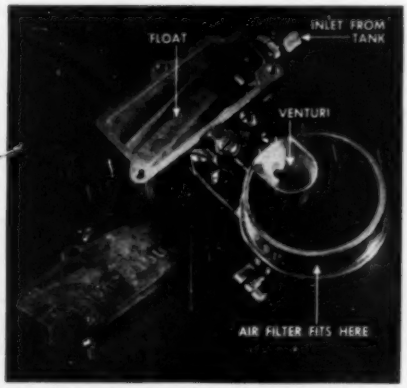

Octa-Gane ⓣ. A product of Continental Carburetion, Richmond, Calif., it works like a carburetor. A collar fits between the air filter and carburetor, bringing the Venturi within the air stream. Water feeds in proportion to air-stream speed.

Knives Test Peas

A "TENDEROMETER," shown above, now takes the guesswork out of cooking peas for canning. It simply slices up a test batch with sharp knives and measures the force needed to cut through them. Patented by American Can Co., the tester has been made available, free of royalties, to commercial canners in the U. S. and Canada.

Light Scaffold Folds Up

THIS 13-foot aluminum-alloy scaffold weighs less than the man standing on it. Locked together without bolts from 52- to 64-lb. sections that fold flat for carrying, the structure can be rolled or anchored. Adding more sections permits quick assembly of towers up to 40 feet. Up-Right Scaffolds, of Berkeley, Calif., makes the units.

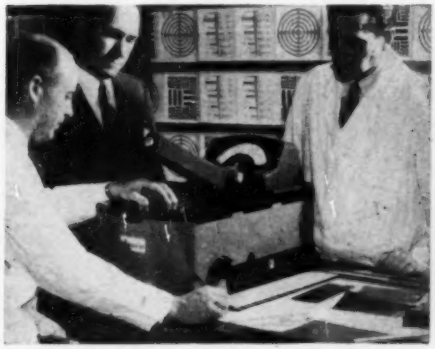

Meter Analyzes Colors

THIS is not a record player, but a new photometer that can measure 1/100,000,000 of the light from an auto headlamp. Its eye, a recently developed electron-multiplier phototube, also detects color differences too small to see. Designed for Ansco film research, the device may also be used to match colors in fabrics, paints, and dyes.

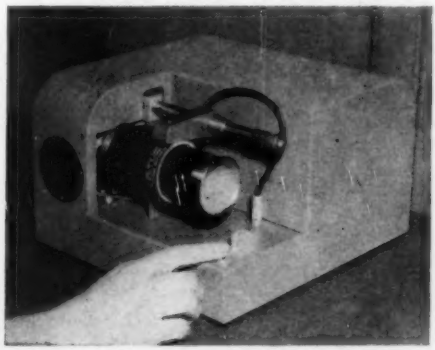

Box Delivers Telegrams

WESTERN UNION'S new Desk-Fax ®, above, puts telegraph service at your finger tips. A message, written on a waxed blank, is wrapped around the cylinder. As this turns, a stylus sends a series of electrical impulses whenever the writing breaks the wax. These cause an identical machine to write the message at the receving end.

'Copter Makes Good As Oil Detective

Pontoon-shod, this Bell helicopter explores deep into Louisiana swamp country for possible oil deposits. Tripod extending below the fuselage carries an oil-sleuthing gravity meter.

THERE'S oil in them thar swamps of southern Louisiana, claimed experts of the Shell Oil Company. The problem was to get in the equipment to set up gravity meters, sensitive to less than 1/10,000,000 of the total power of gravity, that give clues to areas for new, much-needed oil reserves.

Boats and marsh buggies can do the job, but they are too slow in view of currently increasing oil demands. Then the wingless aerial approach, the helicopter, entered the picture. As a result, surveys that had taken 180 days by the overland method were completed in 60 days. With the strong down draft of its rotors flattening reeds higher than a man's head, the 'cōpter lands, and the tripod is lowered into the earth. Freed of contact with the plane, it becomes the sole support of the gravity meter.

After landing, a geophysicist, seated in the helicopter, takes a gravity-meter observation. Minute variations from the normal pull of gravity may indicate new sources of oil reserves.

Portable towers are also helicopter-delivered into the **inaccessible reed jungles** of the bayou. They enable surveyors to fix the location of possible sites by triangulation with a transit.

I'd like to see them make . . .

Everybody has his own pet idea of some gadget he would like to see in general use. What is YOURS? *Popular Science* will pay $5.00 for each one published. Use government postcards only. Contributions cannot be acknowledged or returned.

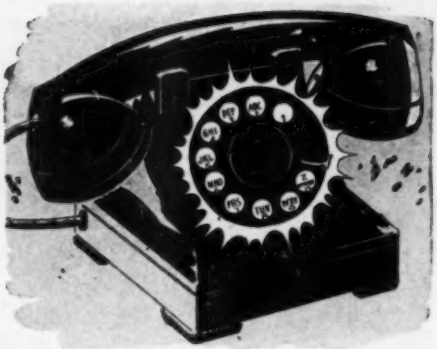

Luminous Dials. I was caught in a power failure—no matches, either—and I had a vital call to make. Luminous characters on phone dials certainly would help out a lot in like situations.—*Billy Keaton, Villa Rica, Ga.*

Wearproof Pivot Holes. Metal linings in the pivot holes of recordings would prevent chipping and enlargement of the holes and the consequent distortion such damage creates.—*Fred Gentile, Ridgebury, N. Y.*

Steering-Wheel Speedometer. Now that most new cars have a horn ring, why not place the speedometer in the easy-to-see top of the steering column? It would keep eyes front.—*Billy Zies, Rochelle, Ill.*

Nice-Smelling Flux. Why not a pleasant-smelling flux for electric welding rods? The present stuff is awful, especially if you're working in cramped quarters. Maybe the odor could be neutralized.—*Neal J. McDonald, Buffalo, N. Y.*

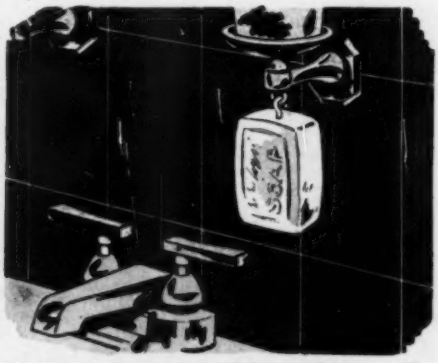

Hang-Up Soap. Soap left standing usually comes up with a gooey, messy side. An inexpensive plastic hook imbedded in the bar would let you hang it up to drain evenly.—*Anthony Pozzuoli, Manhattan, N. Y.*

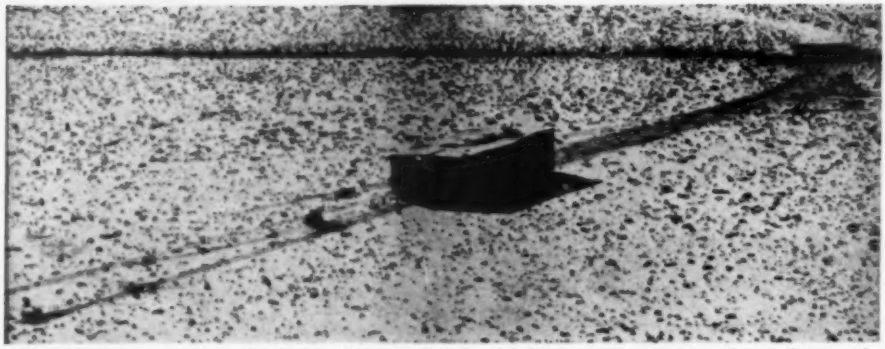

Its 350 tons supported by 146 rubber-tired wheels, former airbase gymnasium makes tracks slowly across New Mexican desert from right background. The trucks moving it are inside.

350-Ton Building Moved 70 Miles

NEAR Ft. Sumner, N. M., the Army had a fine wartime gymnasium and nobody to use it. At Portales, 70 miles away, Eastern New Mexico College needed just such a building for workshops. Problem: how to move the frame structure—160 ft. long, 80 ft. wide, 30 ft. high—across a desert that didn't even have a road most of the way.

These pictures show how 17 men did it in 68 days. Improvised hydraulic jacks hoisted the gym, in one piece, aboard nine trucks and 22 four-wheeled dollies made with wheels from scrapped bombers. The trucks, geared down to a snail's pace, then pulled together as directed by loudspeaker.

Hydraulic jacks to lift the building smoothly from its foundation and then lower it onto trucks and dollies were built from nose-wheel shock absorbers salvaged from wartime bombers.

Six of nine trucks used to move gym are shown carrying rear end. Two tractors helped on hard pulls. Thirty tons of steel beams kept building from cracking even when it crossed a railroad.

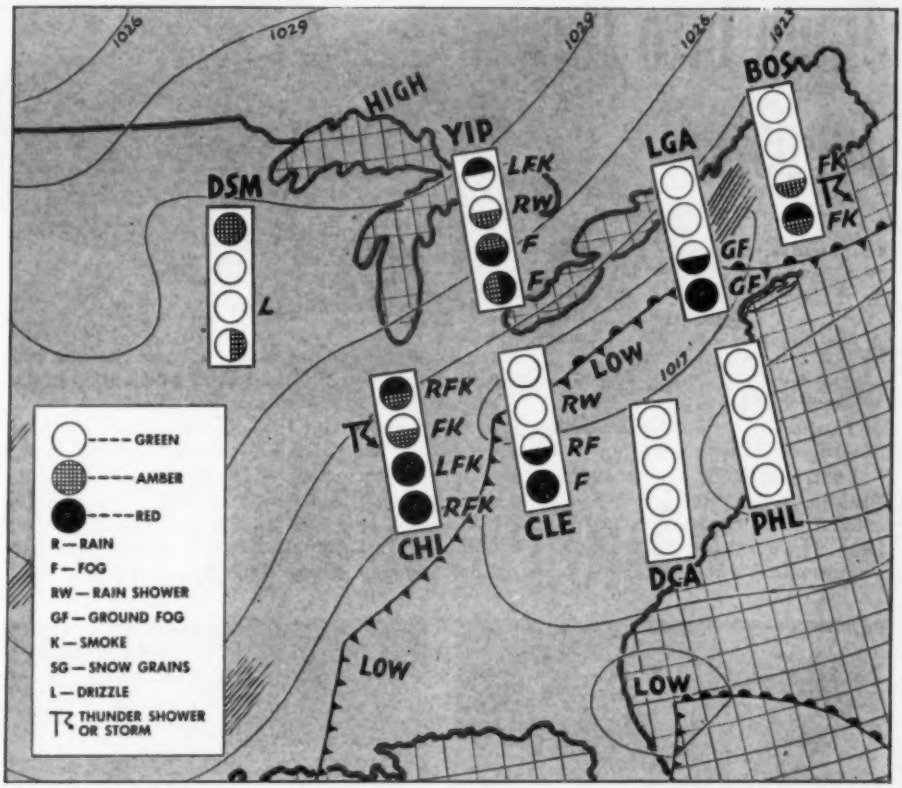

Map Tells Weather at a Glance

ANYONE who has puzzled over weather maps in the daily newspapers will appreciate the simplicity of the one shown above. Devised by United Air Lines, this weather-at-a-glance map gives non-flying operational personnel a quick picture of flying conditions the country over for a 24-hour period. Its symbols are based on a traffic-light color system. Each circle in a block of four represents six hours, with the top one beginning at 6 a.m.

Green Circles: routine weather, with no interruption of operations (ceiling above 1,000 ft., and visibility two miles or better); *Amber Circles:* interruptions may be expected (ceiling between 1,000 and 500 ft., visibility from one to two miles); *Red Circles:* socked in (ceiling under 500 ft., visibility less than one mile). When a circle is split horizontally, the weather has changed during the six-hour period it covers; when the split is vertical, it indicates that a change is expected or has just occurred.

Code letters beside the circles give further details, and are explained in the box at the lower left-hand corner of the map.

Weather information for the map is collected and distributed by United's six master meteorological stations located in Seattle, San Francisco, Denver, Lincoln, Chicago, and New York. Code names for cities shown on this section of the map are: Boston (BOS), New York (LGA), Philadelphia (PHL), Washington (DCA), Cleveland (CLE), Ypsilanti (YIP), Chicago (CHI), and Des Moines (DSM). END

Jump into the Jeepster

Front end has a chrome bumper and stainless-steel radiator plate for glamor, but retains distinctive Jeep shape.

THE war-time Jeep now has a glamorous descendant—a sporty-looking convertible called the Jeepster. You have a choice of two colors, yellow with a black top or fire-wagon red with gray top.

First announced some months ago (PS, Jan. '48, p. 126), the Jeepster now has been made a main production unit of Willys-Overland. The delivery price is less than $2,000.

Powered by the standard four-cylinder Jeep engine, it has an average gasoline consumption of 29 miles per gallon at 35 m.p.h. Drive is only to the rear wheels.

Built on a 104-inch wheelbase, the Jeepster weighs 2,500 pounds. Overall length is 174 inches, width 69 inches. With the top up, it stands 62 inches high. The top is a four-bow type that is easily raised or lowered by one person. Low-pressure tires increase riding comfort.

Zippered flap in left-door curtain lets driver signal quickly. Curtains, stretched on metal frames, can stay in place with top up or down. Note rear-seat step behind driver's hand.

Luggage goes behind the rear seat. Back folds forward for access to the compartment. The curtains can be stowed in the big pocket on the back of this seat. Spare is at the rear.

Those not so nimble can get into the rear past foldable portion of front seat. There's room for two on the driver's seat. If necessary, three can squeeze into the Jeepster's back seat.

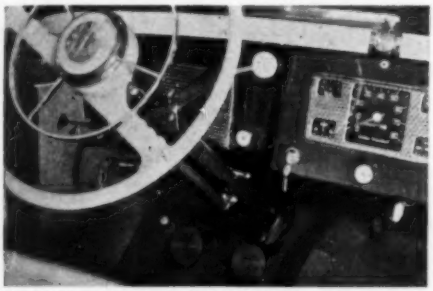

Overdrive lever and hand brake are seen at the left of steering wheel. Overdrive is standard equipment on the Jeepster. The car can do better than 70 m.p.h. with its 63-hp. engine.

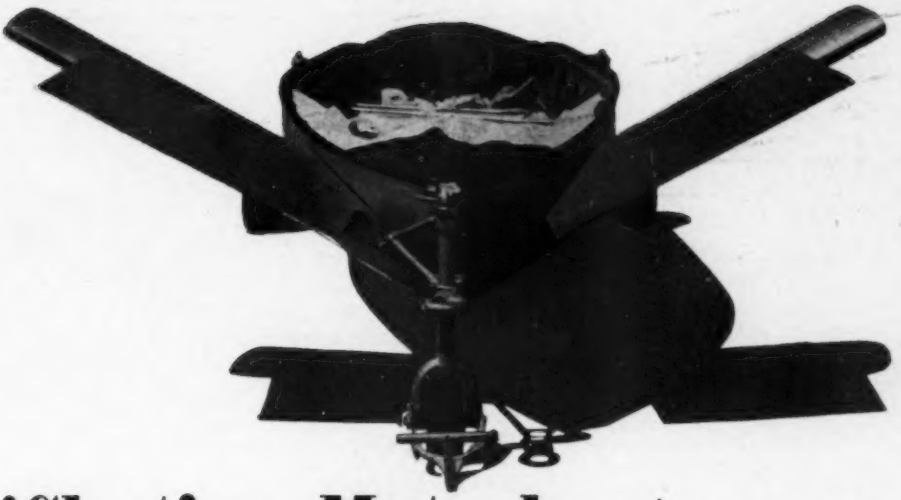

'Chuting Motorboat for Sea Rescues

By Devon Francis
PS photos by W. W. Morris

B-29 delivers 29-foot craft that can carry 15 survivors of ditched plane 600 miles at 8 knots in heavy sea.

FOR nearly two years U. S. Air Forces researchers have been working on a way to boost the life-insurance of long-range bomber crews that are forced to ditch their planes in ocean waters. Last month at their whopping Wright Field laboratories at Dayton, O., they demonstrated that they had it—a 15-man metal motorboat that can be dropped by parachute. This flying lifeboat can weather 18-foot waves and voyage for almost 600 miles under its own power.

Assuming that use of the new craft will be based on experience gleaned from rescue work in World War II, this is what will happen when an airplane goes down at sea:

A B-29 or B-50 will race to the area where the unlucky crew is tossing around in rafts. Snugged under the big rescue plane's belly will be the new flying motorboat. The mother plane will drop a smoke float to determine the direction and velocity of the wind. Then it will square away for an upwind run on the men below. Peering through a sight at an altitude of only 800 feet, the bombardier will flick a switch when he is over the rafts. That will release the motorboat from the single bomb shackle holding it to the belly of the bomber.

Guided straight and true in the line of flight by a pair of fins, much as an airplane is stabilized in flight, the boat will curve away from the mother ship for a couple of seconds. At that instant a lanyard attached to the plane will yank out a pilot parachute, and then the main 'chute, 100 feet in diameter, will begin to fill. This 200-pound 'chute, the biggest ever put into quantity production, will lower the boat at 18 to 22 feet a second.

Another lanyard will open two carbon-

1 B-29, flying 185 m.p.h. at 800 ft., drops new USAF rescue boat attached to huge parachute.

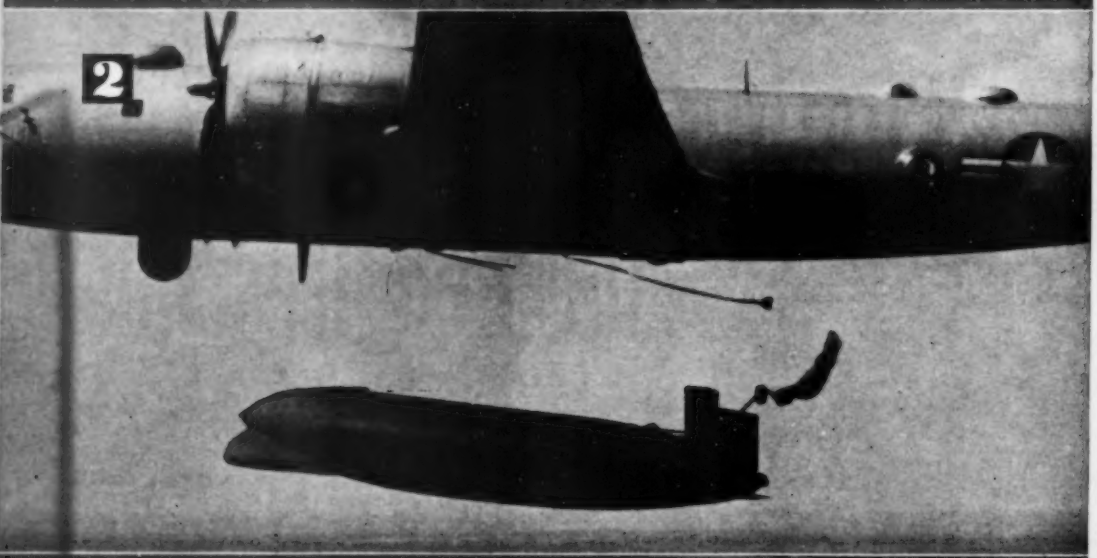

2

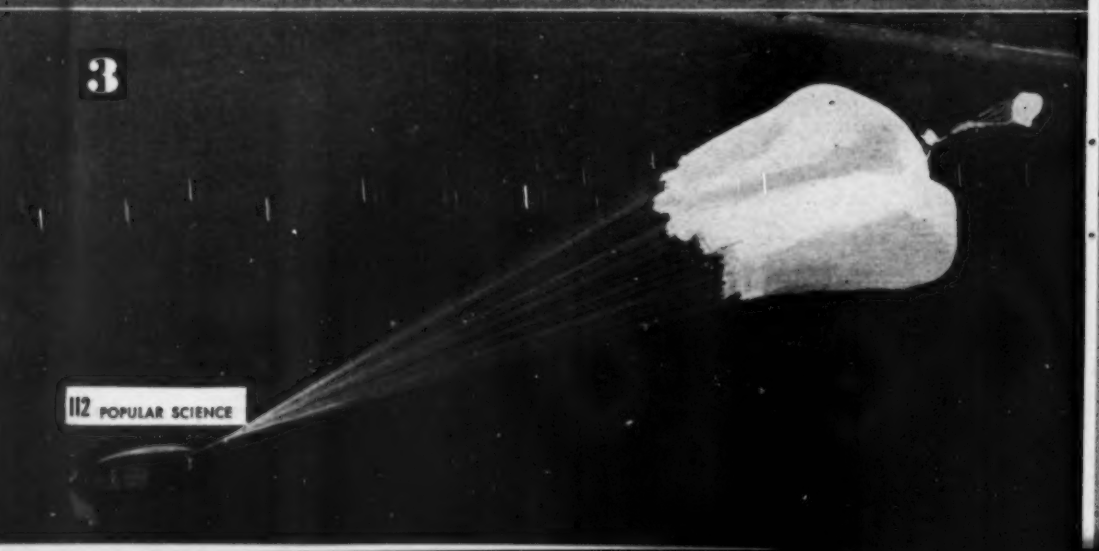

3

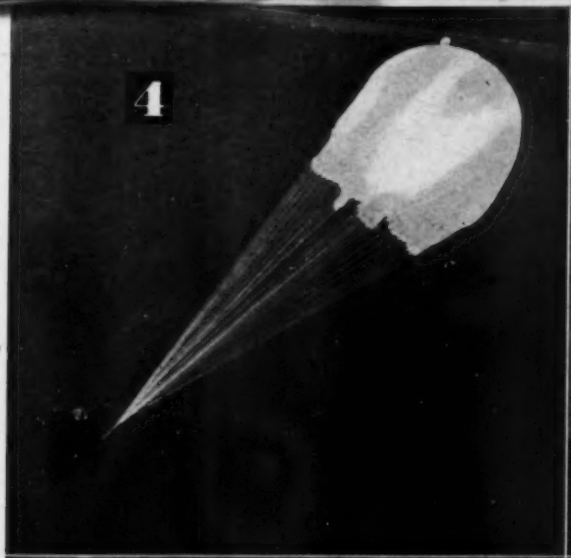

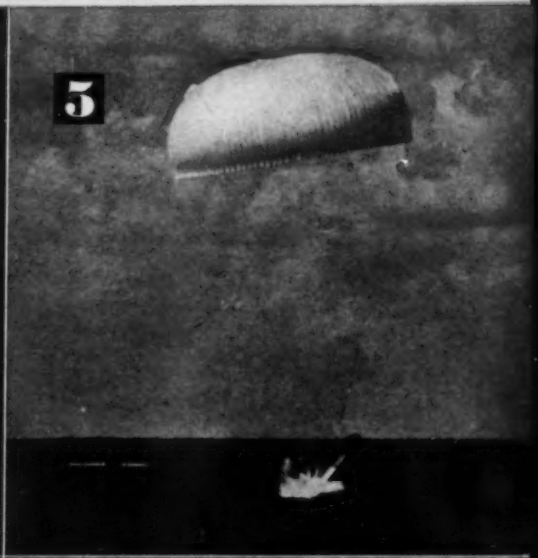

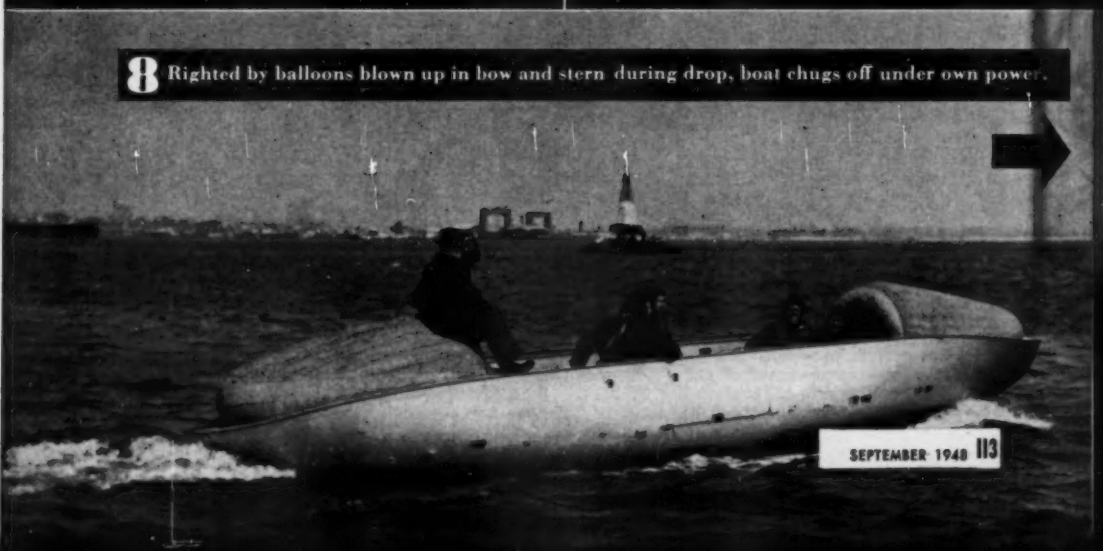

8 Righted by balloons blown up in bow and stern during drop, boat chugs off under own power.

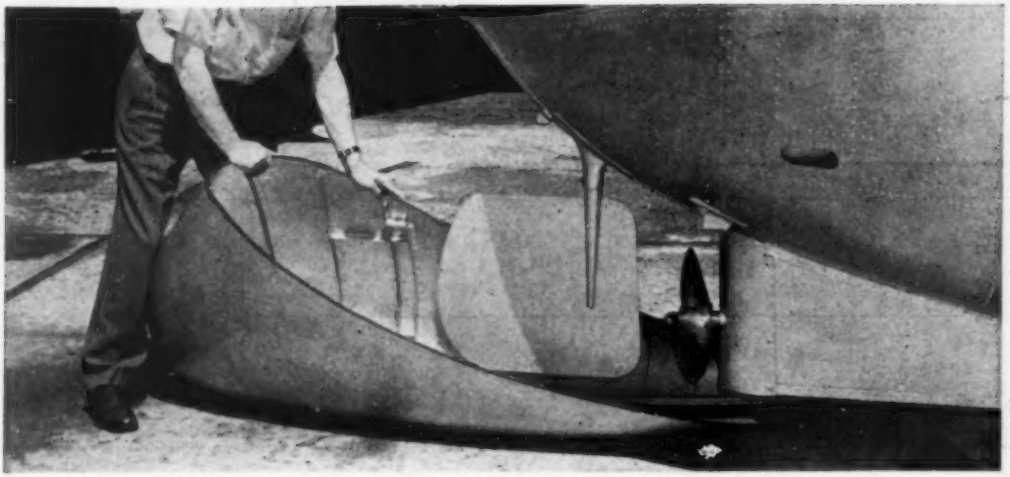

Metal guard over rudder and propeller streamlines new USAF rescue boat in flight, keeps parachute from fouling when craft is dropped, and prevents damage when it hits the water.

dioxide bottles anchored to the floor of the motorboat. These will have inflated two rubberized self-righting chambers on the bow and stern by the time the boat hits the water. Hence, if the boat lands upside down, it will right itself instantly.

The 'chute will now collapse, and the boat will drift downwind toward the stranded airmen while they are paddling toward it. When they reach it, they will yank a rope at its waist. This will release a pair of boarding ladders, and the men will step into a vessel far superior to their rafts. In this big lifeboat, they will be able to make almost 8 knots with its 18-hp. engine. Its interior can be kept as dry as a hearth by stretching a nylon canopy over the three midship hoops and sealing it all around.

To the Air Force, this 20th century version of Captain Bligh's longboat is known as the A-3 droppable lifeboat. Whether war comes or not, it will be a boon to men tossing about on rafts after ocean crashes, whether in icy Arctic waters or torrid tropic seas. If war should come, the risks run by men making long flights over the top of the world (PS, Aug. '48, pp. 75-81) will be greatly reduced.

Steel cable from parachute is attached to boat just aft of horizontal center of gravity, so that bow will hit water first. Craft is 29 ft. 9 in. long and, as dropped, weighs 3,400 lb.

Single shackle clamps boat to bomber. Here, a plane crewman in the boat guides the hook to its anchorage amidship. Gunwale is cushioned with rubber to prevent chafing against plane.

For loading under bomber, boat is rolled into place on tricycle beaching gear. Flight fins extending from the bow act as both horizontal and vertical stabilizers when it is released.

The A-3, contrived by Capt. F. C. Spinney, project officer, is produced in quantity by the Edo Aircraft Corp. at College Point, N. Y. It will be employed in wartime the way the A-1, which B-17s carried, was used in World War II. But it will be a lot more useful. The old A-1s, for example, were made of laminated wood. In the tropics, termites feasted on them. The boats carried only one-lung engines that could hardly maintain seaway in heavy weather. The three parachutes needed to drop them weighed two and a half times as much as the one 'chute that lowers the A-3. Any metalworker who can patch the skin of an airplane can mend the aluminum A-3.

And apparatus still to come will make the new lifeboat even more valuable. Radio controls will permit the A-3 to be operated from the air as soon as it hits the water. Five radio channels will be provided on a control panel in the mother aircraft. One will jettison a sheath that protects the propeller and rudder of the boat during flight and fins that keep it going straight in the air just after release. A second will start the engine. A third will move the throttle, and the fourth and fifth will steer the boat.

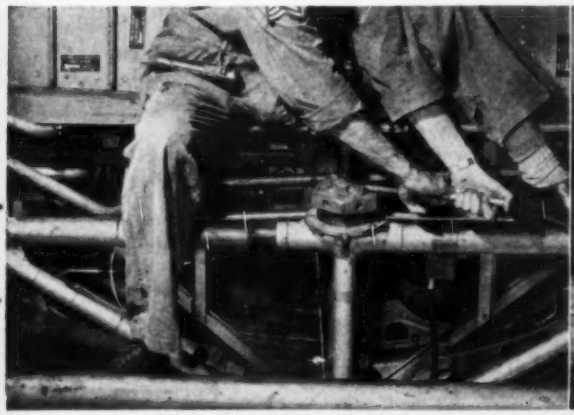

Jackscrew is tightened by a second crewman, in bomb bay, to draw the boat snugly against plane's fuselage. For release, shackle can be opened either pneumatically or mechanically.

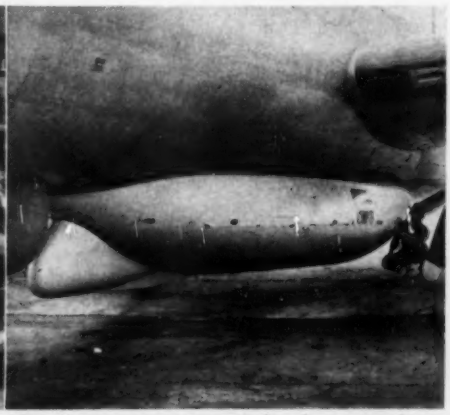

Beaching gear removed, bomber is ready to take off with rescue boat under its belly. After boat is in the water, guard over rudder and propeller is jettisoned by pulling a lever.

Hull of rescue boat is formed by 20 watertight compartments. Others provide storage for food, medicine, fuel. Nylon weather canopy fits into groove, indicated by pencil, inside gunwale.

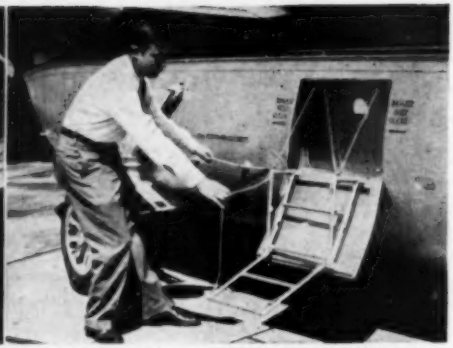

Boarding ladder unfolds from the hull when spring catch is released by tug on line that can be reached from the outside by men swimming or riding rubber raft alongside the boat.

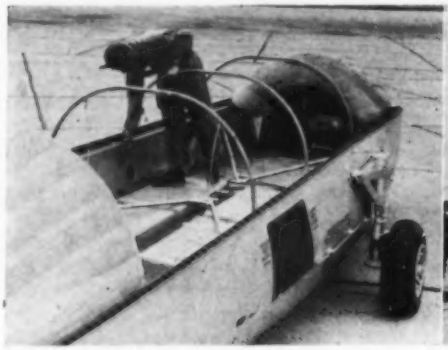

Three hoops form supporting frame for weather canopy. Square dark area on hull is boarding-ladder hatch, painted red so that men in water will keep out of its way when it drops open.

Beaching gear for maneuvering boat into place under plane consists of three wheels on telescopic struts that lower or retract them when crewman turns jackscrew with rachet wrench.

To the lay eye, nothing has been forgotten. A lanyard switches on a light atop one of the self-righting chambers so that the boat can be spotted at night on the ocean surface. An inner wall around the cockpit provides compartments for stowage, water distillation, and food heating. Below-deck food lockers are waterproof. So are the engine compartment and engine-control panel. Miscellaneous equipment includes a sea anchor, fire extinguisher, compass, bilge pump, bow line, tool kit, salt-water soap, and a cockpit heater.

Use of the A-3 probably will not be limited to the rescue of bomber crews. It could come in just as handy in extending succor to commercial aircraft and to the ditched crews of the protective long-range fighter planes that accompany bombers on missions. END

New Metal for Kitchenware

STAINLESS-CLAD copper, a newly perfected material for cooking utensils, combines the desirable qualities of heat-conducting copper and tarnish-proof stainless steel. The composite metal is also recommended for ironers, radiator shells, freezer parts, and many industrial applications. Readily formed and welded, laminated sheets offered by American Cladmetals Company of Pittsburgh, Pa., consist of an inner layer of copper sandwiched between two firmly bonded exterior layers of stainless steel.

Balloon Rises 24.4 Miles

A NEW altitude record for free balloons was established recently, when a balloon carrying cosmic-ray instruments soared to a confirmed height of 129,000 feet—24.4 miles above the earth—during studies sponsored by the Office of Naval Research.

This Capsule Challenges Vacuum Tube

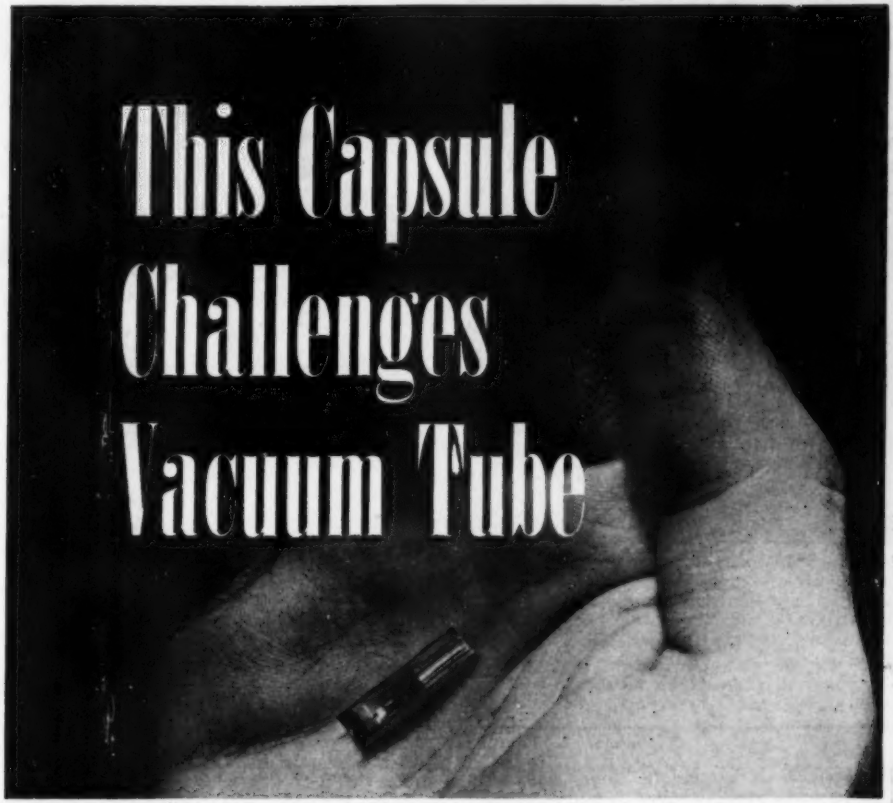

Transistor (shown with case cut away) uses new principle to amplify like vacuum tube.

Simple, tiny amplifier for telephones, radio, and television utilizes "holes" in atoms of rare element.

FOR the first time since its invention 41 years ago, the vacuum tube that runs your radio, operates welding machines, counts beans, opens doors, and supports the $3,500,000,000 electronics industry, has a rival. It is a tiny, seemingly simple gadget called a transistor.

A transistor can do nearly everything a vacuum tube can do—and then some. It amplifies, oscillates, and detects electric currents. It can amplify telephone conversations and television signals. It makes possible the construction of a complete, high-fidelity radio without any vacuum tubes.

The transistor has no vacuum, grid, plate, or cathode. Since there is no cathode to shoot out electrons when hot, there is nothing to heat up. The transistor starts to work the instant the current flows. Partly for this reason, the transistor uses less power than a vacuum tube. It requires only about a tenth as much as a flashlight bulb.

The device that may start a revolution in electronics is smaller than a paper match. Inside its little, cylindrical metal case, three wires are connected to a crystal of germanium, a rare element with curious electrical properties. Prompted by a signal from one of the three wires, the germanium acts as a valve controlling the flow of current between the other two wires.

This valve causes the voltage and amperage in the output circuit to vary as they do in the input circuit. Thus by transferring the signal from one circuit to another, its strength may be increased as much as 100 times.

The first use of the transistor, say the Bell Laboratories scientists who invented it, probably will be in their own business

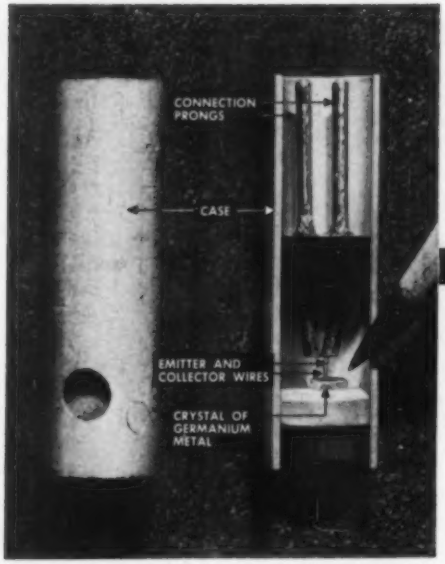

A transistor ready for use is shown at left above, while at right is one with its cover cut away to show the key parts—the two tiny wires and block of metal under the pencil point. A third wire is out of sight under the block. Transistor is about one-third the size shown here.

Like any amplifier, transistors control great power with weak input signals. Output circuit is like a crowd of strong men pushing the same way on both sides of a turnstile. None pass through, unless a weak man pushing the other way upsets the balance. Then strong men pass.

of telephone transmission. Phone calls fade out after traveling on wires a few miles and must be built up again by vacuum-tube amplifiers called repeaters. Transistors can do this building-up without consuming as much power as the vacuum tubes. This will permit the installation of more repeaters, improving service.

Television, too, will benefit. Transistors can amplify over a wide range of frequencies, including the very high frequencies used for video. So, by using transistors as repeaters, television programs may be transmitted over ordinary telephone wires. This would provide a simple means of linking many cities into a television network, just as the telephone lines now furnish radio networks. At present, television can be sent from city to city only over coaxial cable or microwave radio relay systems.

Transistors also may help make many small, portable devices—such as "wristwatch" radios and the tiny amplifiers used by the hard-of-hearing—still smaller and lighter. Since transistors require less power than even the smallest vacuum tubes, they can be used with smaller batteries. And in hearing aids and tiny radios it is the batteries that take up most of the weight and space.

Whether transistors will ever replace the vacuum tubes in your home radio will probably depend most on how much it costs to make them. Bell scientists won't even guess what you will have to pay for a transistor, but the simplicity of the device indicates that mass-production economies will be possible, and plans already are being made for a pilot plant to manufacture the new devices.

It is an interesting sidelight to history that the telephone company, which played such a big part in the invention and development of the vacuum tube, should also conceive the device that may replace it. Dr. Lee de Forest, the electronics genius who invented the amplifying vacuum tube, was a member of the telephone company staff until a few years before he patented his "audion." And he sold a license for telephone use of that patent to his former employers.

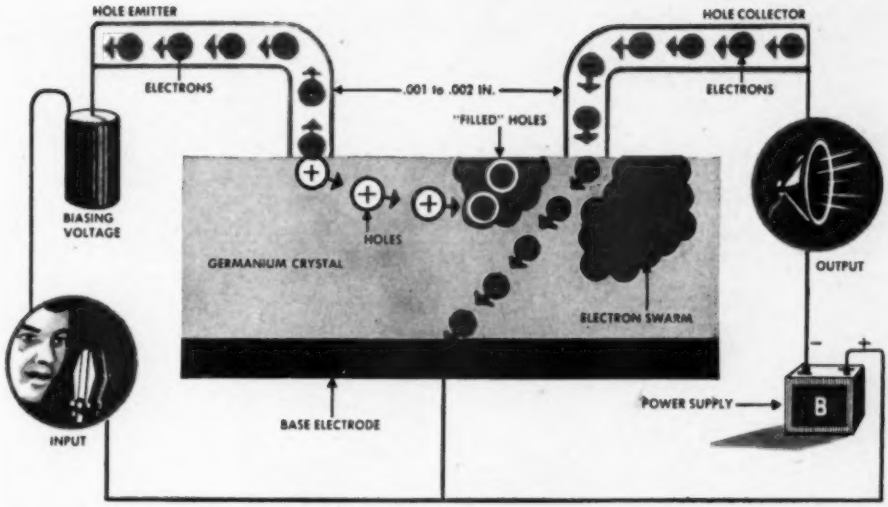

Exactly how transistor works is still debated, even among Bell Labs scientists. One explanation suggests electrical "holes" are formed in crystal of semi-conducting germanium metal. Input signal pulls electrons away from atoms near emitter point, leaving empty spaces in atoms. These travel through crystal like bubbles. "Holes" are positively charged and neutralize the swarm of electrons that ordinarily impedes flow of other electrons from collector wire, clearing a path for electrons to stream to the base electrode. This stream is amplified current.

Now, nearly half a century later, a new generation of telephone physicists has found a radically different method for amplifying electric currents. This new method, utilized in the transistor, depends on the strange way in which certain materials—the elements germanium and silicon, oxides of copper and other metals, and a few additional compounds—react to electricity.

Germanium, for example, is a hard, brittle, silver-grey metal that is in between a good conductor and a good insulator—physicists class it as a "semi-conductor." It had little commercial value until someone discovered that it conducted current much better in one direction than in the other. If you apply alternating current (which changes its direction many times a second) at one end of a germanium crystal, direct current (which always goes in the same direction) comes out of the other end. In other words, it is a natural rectifier. Germanium crystals are widely used for this purpose now in radios and other devices.

Such interesting properties have made germanium and its sister materials the subject of much research in laboratories all over the world. At the Bell Telephone Laboratories, Dr. William Shockley, a top-ranking physicist, suspected that germanium's ability to carry electricity might be changed by applying an electric field to it. A varying field would induce a varying current, making the germanium an amplifying device. But this apparently good idea did not work at first.

The task of finding out why was assigned to Drs. John Bardeen and Walter H. Brattain. They developed a new theory to describe the action of germanium. When translated into practice in the workshop, this theory became the transistor, which works very well indeed.

Drs. Bardeen and Brattain explain how the transistor operates by using the concept of electrical "holes." Ordinarily, electric current is considered to be a stream of electrons, very tiny atomic particles each carrying one piece of electrical charge. But if an electron is moved away from the atom to which it belongs, the atom is left with an empty space—a hole. These holes can

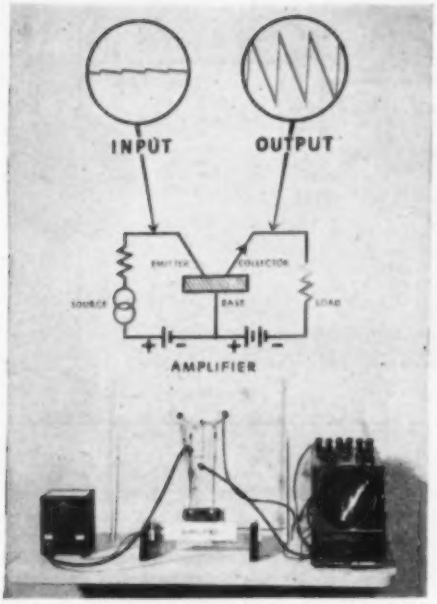

Display panel (above) shows transistor used to amplify pulse signals, one of many possible applications. Complete radios have been made with transistors replacing all vacuum tubes.

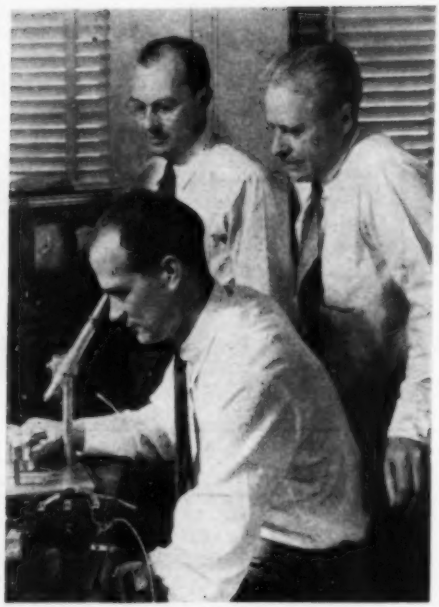

A three-man team of Bell Laboratories physicists developed the transistor. Left to right are Drs. William Shockley, who directed the work, John Bardeen, and Walter H. Brattain.

move around from atom to atom just as bubbles move in a glass of water. And a stream of holes can be produced in a block of germanium just as a stream of bubbles can be produced in water. Since a hole lacks the negative charge of an electron, it is positive and will move from a positive electrode to a negative electrode. A hole can be considered to be a piece of positive electricity, just as an electron is a piece of negative electricity.

In a transistor, the weak signal pulls electrons out of the germanium atoms near the point of the emitter wire. This loss of electrons creates holes that can move around near the surface of the germanium, but only as far as .001 or .002 inches from the emitter point.

The point of the collector wire is placed at this distance. It is maintained at a high negative potential—the battery is trying to force electrons out of the wire and into the germanium crystal. But the strange properties of germanium prevent this. The electrons bunch up around the collector point, becoming so crowded that they prevent the flow of additional electrons from the collector and there is no output. When holes reach the collector point, however, they neutralize part of this bunch of electrons, clearing a path for more electrons to flow out of the collector. Some of the electrons from the collector fill up the holes and are neutralized, but the electrons are so numerous and moving so fast that many more rush right by the holes and reach the base electrode. The electrons that get past the holes make up the output current.

Since the number of electrons able to flow out of the collector depends on the number of holes reaching the collector—which in turn depends on the signal—the output is patterned exactly after the signal. And since more electrons flow out of the collector than holes to the collector, the output is larger than the signal. Thus, the transistor amplifies the signal. END

New Element Heavy as Lead

TECHNITIUM is a radioactive metal whose density of 11.46 makes it just about as heavy as lead, the Argonne National Laboratory reports. First tests of the physical properties of this new synthetic element have been made possible by its recent preparation in visible amounts.

Hydraulic Giant Bends 5-Ft. Pipe

THE picture at right unveils the world's champion pipe bender: a two-armed hydraulic giant that makes smooth curves in steel tubes big enough to walk through.

Shown bending a 50-inch duct for a petroleum-cracking plant, it has handled 60-inch pipe. And it is believed to be capable of bending diameters up to 100 inches—three times the size of the biggest pipe bent in one piece before the M. W. Kellogg Co., of Jersey City, N. J., developed this machine.

The pipe is anchored to the floor and heated to 1,450° F. with rings of gas burners. The arm at left then pulls down on the cross beam with a force of 5 tons, while another at right pushes up.

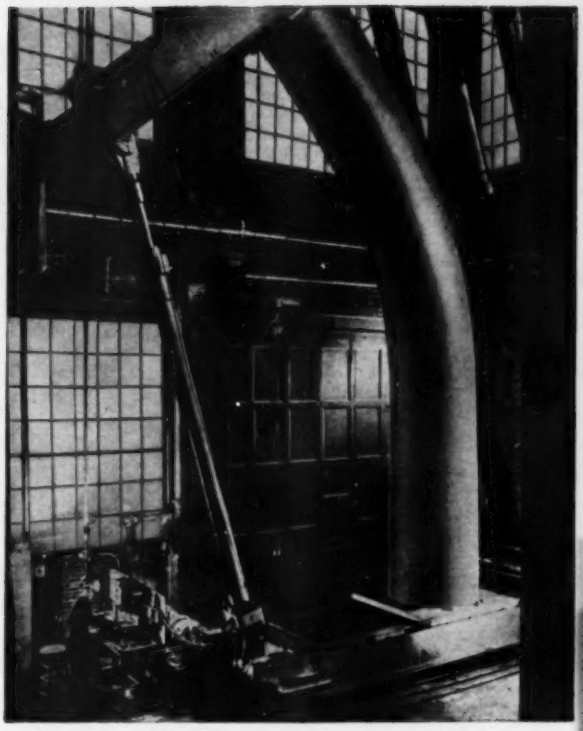

Air Motor Twirls Huge Pipe Wrench

THIS big tong, built like a Stillson ® wrench, was developed to speed the assembly of oil-well tubing. It is believed to be the fastest wrench ever made. Reversible simply by flopping it over, as shown at left below, it can be used to tighten or unscrew threaded pipe. Its jaws are twirled at 16 or 60 r.p.m. by a compressed-air motor with a two-speed chain drive. The unit is made by the Byron Jackson Co., of Los Angeles.

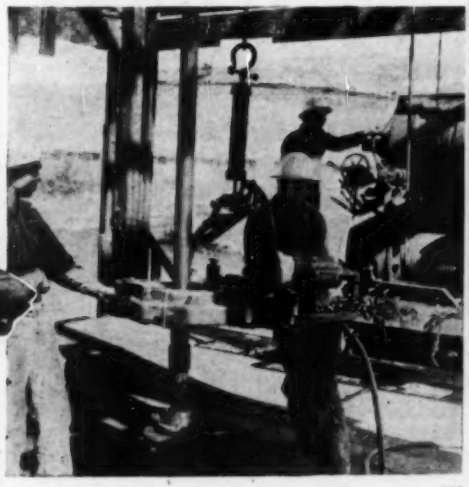

This switchboard helps nations confer. It is in a soundproof booth overlooking the horseshoe table around which the United Nations Security Council meets. The engineer operating it controls the delegates' microphones and adjusts volume for speaking units and recording devices.

Wiring the UN for

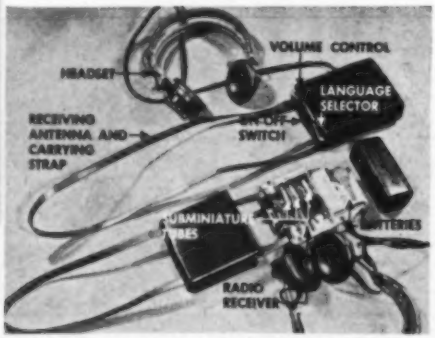

Walkie-hearie is a tiny, battery-powered receiving set. A switch on the top of the case tunes it to any of six different frequencies.

Latest electronic devices overcome barriers of language and distance in this complex United Nations system.

By Martin Mann

PS photos by Hubert Luckett

MAYBE you live in Kansas. Or Sweden. Or Afghanistan. Yet no matter where your home, you can still hear what's happening at United Nations meetings—and in your own language. The world's most complex radio network, broadcasting in 23 different tongues 25 hours out of every 24 (thanks to overlapping programs) makes this possible.

Reporters and officials use walkie-hearies to listen to proceedings in whichever one of six languages they prefer. Bob Manning, United Press man, is shown adjusting one. The interpreters, broadcasting instantaneous translations of everything said, are seated in booths at rear.

World Listening

The hub of this globe-circling network is now a reconverted war plant on Long Island, a few yards beyond the city limits of New York. There, in the temporary headquarters of the United Nations, every technique of modern electronics is being used to convey to every land in the world news that effects every one of its people.

Most of the equipment is standard—anybody can order it from a catalogue—but it is used in new and unusual ways. Never before has a governmental body relied so much on radio waves and vacuum tubes.

Casual visitors to Lake Success, however, see little of this communications machinery. So let POPULAR SCIENCE take you behind the scenes, into the workshops of the scores of engineers who operate it.

The words spoken by a UN delegate travel a long and torturous road before they come out of a loudspeaker in Czechoslovakia or Iraq. The first turn in this road is a control room in one of the booths that every visitor sees from the gallery of the Security Council chamber. There an engineer sits at a console. Watching the Council in action below him, he adjusts the switches and "pots" that control all the microphones in the room. When a delegate prepares to speak, the engineer clicks on the nearest mike, then switches back to the Council president when the delegate stops.

ROOF GARDEN
SPOTLIGHTS FOR MOVIE CAMERAS
VISITORS' GALLERY
"EGG-CRATE" CEILING GIVES EVEN LIGHTING
PRESS GALLERY
OFFICIAL OBSERVERS
SECURITY COUNCIL
INTERPRETERS & STENOGRAPHERS
CONTROL ROOM FOR PUBLIC-ADDRESS SYSTEM
TELEVISION CREW
MOVIE CREW
SIMULTANEOUS INTERPRETERS
RADIO COMENTATOR

From the engineer's control panel, the lines travel down to an amplifier room directly below. This large, brick-walled room is filled with racks of electronic equipment that amplify the output of every microphone in the UN's vast system—there are mikes in conference and committee rooms as well as in the principal chamber. The amplified speeches then go out to loudspeakers in the meeting rooms and press lounge, to listening sets in several of the UN offices, and to the adjacent recording room.

Every word spoken in a United Nations meeting is preserved for posterity on large phonograph records. These verbatim recordings will enable the history student of the future to *hear* exactly what was said, the way it was said, just as though he had been present. He no longer will have to rely on dull—and possibly misleading—written records made from stenographic notes.

History Broadcast from Platters

The verbatim records also turn up in the UN's radio programs. The most important, dramatic sections of the speeches are broadcast from the records, bringing the original speaker's own voice to the radio audience. Many of the UN programs are completely recorded—music from records, plus parts of speeches from other records, and commentators' voices are combined in one program record, which is then played over the air.

The wide use of completely recorded programs simplifies the radio operation, permitting the identical show to be broadcast at various hours to allow for the difference in time throughout the world. Thus people in Norway, India, and the Philippines can all hear the same breakfast newscast at breakfast time.

The UN radio-news desk, largely the creation of its chief, Cesar Ortiz, is geared to operate as fast as a tabloid newspaper's city desk when necessary. It is in a small office of the press section. Two reporters sit at adjacent desks. One wears earphones plugged into the UN-wide intercommunication system and types notes on the speeches he hears. As fast as he finishes a page, his partner takes it and rewrites the notes into news bulletins, typing them directly on a special duplicating sheet. As quickly as *he* finishes a page, a girl grabs it and runs off copies on a duplicating machine. These copies are then distributed to the various language sections of the radio division, which prepare news broadcasts in 23 different

Amplifiers for all the UN's microphones—every meeting room has a mike for each delegate plus extras for translators, etc.—are located in this special room. From this point the lines go out to the complicated public-address system, broadcasting studios, and recording room.

tongues, including such rarely heard languages as Pushtu (Afghanistan) and Amharic (Ethiopian).

Most UN broadcasts, both recorded and "live," originate in the five studios at Lake Success. From there they travel over wires to whatever transmitters the UN can beg, borrow, or rent. The largest number of shows are carried by the State Department's big network, the World-Wide Broadcasting Foundation, and the Canadian Broadcasting Corporation, but some are relayed by RCA to a station in Tangiers, North Africa.

All these transmitters operate in the 6-to-22 megacycle band reserved for international broadcasting, and can be picked up by anyone with a short-wave receiver. Most listeners, however, hear UN programs on the standard broadcasting band from local stations in their own areas.

UN Reaches Fourth of World Listeners

These local stations can get the programs in any one of several ways. They may pick up a short-wave transmission and rebroadcast it directly, or record it for broadcasting later. In the United States, 113 stations are fed UN programs over wire lines. Overseas, many stations that have difficulty receiving the short-wave programs are mailed program recordings—500 such records are sent from Lake Success every month. With this varied system of program distribution the UN now reaches an audience of about 100,000,000 persons—about one out of every four radio listeners in all the world.

Just outside the Security Council's chamber is the "shack" of an amateur radio station, K2UN, operated by volunteers. It is the first station actually owned by UN, and

Top-level UN officials, such as Dr. Ivan Kerno (below), chief of the legal department, have consoles linked to the public-address system. They can keep in touch with the progress of important debates without leaving their offices by simply turning from their desks and tuning in.

News of UN activities is organized into radio programs in 23 different languages, including the Chinese being written by Mrs. Chang (below). She can "cover" meetings from her desk, since the Chinese section has a headset wired into the extensive public-address system.

its central position in headquarters symbolizes the importance the organization's officials attach to radio.

Construction of this ham station was the first small step toward the creation of a big, new network that will employ the newest radio techniques to reach every part of the world. The ham station, however, will not be abandoned even when the new system is completed. By keeping in touch with amateurs all over the world, UN officials will know how well their principal broadcasting system is operating. The hams, who already have played an important role in radio development, thus may contribute still more to the solution of the problem of world communications.

Headquarters of the proposed new system, to be owned as well as run by UN, will be in New York. The main station will have short-wave transmitters beamed at various parts of the world, a medium-wave transmitter for local use, and possibly FM and television transmitters.

A second large station is planned for the main European office of the UN, in Geneva, Switzerland. This station will pick up and rebroadcast over short and medium waves the programs originating in New York. It will also have studios for producing its own shows. A third station, intended purely for short-wave relay, will be located at some point in the Pacific, and a fourth may be set up in South America.

All these short-wave stations are expected to use the new method of single side-band transmission, which requires only half the available channel for any one program. The other half can then be used for something else—in the case of the UN, it will probably be employed to conduct interoffice business by teletype.

Additional teletype communication will be transmitted by frequency-shift keying, which permits both teletype signals and voice or music to be broadcast at the same time over the same frequency. Frequency-shift transmission sends the teletype signals as small changes in the frequency of the carrier wave. These frequency changes, while too small to affect a receiver tuned to the voice broadcast, are picked up by the special frequency-shift receiver and made to operate the receiving teletypewriter.

Technical Improvements Planned

Other modern techniques will make relay operations more dependable. The receivers that are to pick up short-wave transmissions for rebroadcasting will be designed to build up the carrier wave, reducing fading effects, and to expand the volume (which is ordinarily compressed in transmitting) to its original range. Groups of receiving antennas will be spaced to avoid fading, and the transmitting antennas will be of the movable, directional type, so that the radio energy can be concentrated in desired areas.

Part of this large-scale network is scheduled to be built in the near future. The first station will be constructed in New York, with three 50,000-watt short-wave transmitters. Studio facilities will also be greatly enlarged when the new permanent headquarters of the United Nations is built on New York's East River. The skyscraper office building will have a dozen small "talk" studios, several large studios, and a theater-type studio that can also be used for television broadcasts. END

Many of the UN's radio programs are broadcast from recordings, made in this modern disk-cutting room. Here, too, every word spoken in all meetings is transcribed—for the archives and for radio use. This system permits millions of people to hear the actual words of the delegates.

Records bearing complete radio shows are mailed all over the world to local stations, which rebroadcast from the recordings. Majority of the 100,000,000 listeners to UN programs get them from local stations, which retransmit either from records or from short-wave or wire relay.

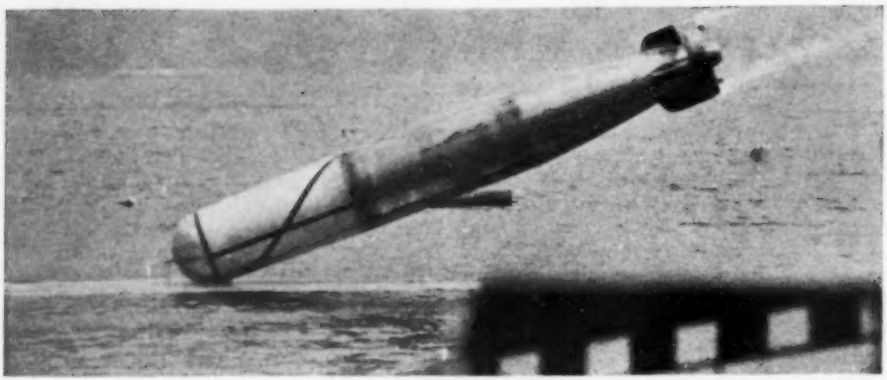

Test torpedo starts run across lake from launching tube. Stripes help check rotation.

Sound Times Tin Fish

SOUND waves are helping Navy scientists develop torpedoes that will go where they are aimed. These sounds, too high-pitched for the human ear, give a running account of the course and speed of test torpedoes. The Navy is using this data to design better controls.

The experiments, at Morris Dam, Calif., (PS, May '48, p. 112), make use of the Doppler effect. This is the change in frequency of a sound wave caused by movement of the transmitter or receiver. The torpedoes carry a device called a transducer, which converts electrical waves into sound waves. The transducer sends a 60,000-cycle note through the water to a receiving transducer, hung under a raft, that changes it back to electricity and measures its frequency. The movement of the torpedo makes this frequency different from the original 60,000 cycles—how much different tells where the torpedo is and how fast it's going.

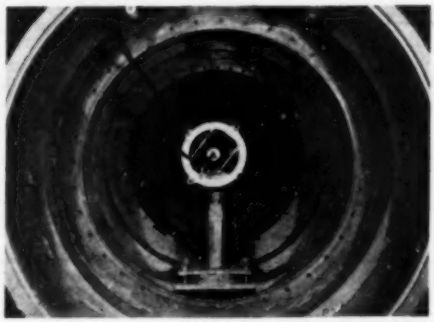

Transducer (center above), mounted in nose of torpedo, contains rochelle-salt crystal that turns electrical wave into 60,000-cycle sound wave. About 15,000 cycles is highest you can hear.

Sketch shows how moving transmitter shortens distance between waves, increasing frequency.

Receiving transducer (below), similar to transmitter, converts sound back to electrical wave.

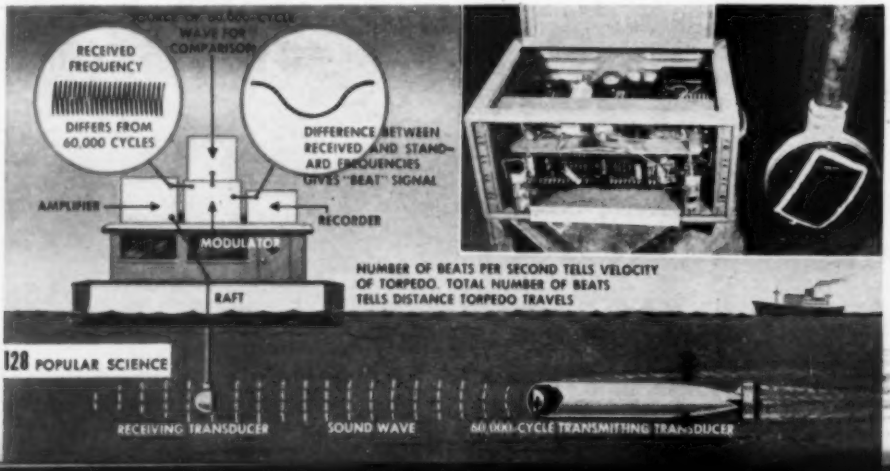

Rubber Makes Casting Mold

THESE pictures show a new way to cast art figures, toys, and other small objects in plastic or hard rubber without special tools or mechanical equipment. The process, almost as easy as pouring water out of a glass, can be used commercially or just for fun. It is based on the ability of a new material called Elastex®, made by the Plasticast Co., of Palo Alto, Calif., to control the coagulation of latex (liquid rubber) at room temperature.

Mold is made by stirring one part of Elastex® into two parts of latex, a little at a time, and pouring the mixture—resembling a thick chocolate malted—over object to be duplicated.

Mold solidifies overnight at room temperature or in 15 to 20 minutes in oven at 135° F. Baking improves mold by vulcanizing. It can now be pulled from glass with a twisting motion.

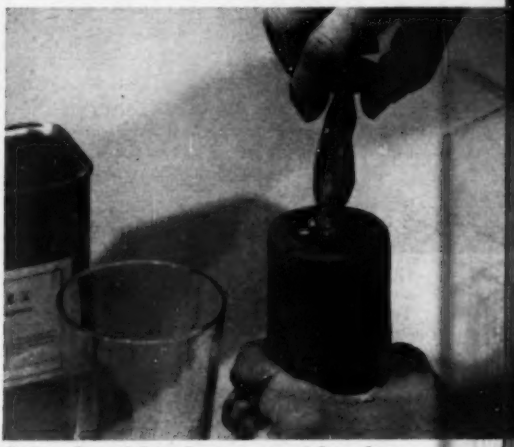

Original model is then removed from bottom of flexible casing, leaving hollow pattern. Before casting, the mold is turned inside out, like a glove, and lubricated with glycerine.

Cast is made from liquid plastic, to which a few drops of a catalyst have been added to make it harden. Casts can also be made of the same materials as mold—latex and Elastex.

Cast sets in 30 minutes, comes out as easily as original model. Figure shown here is made of Plastidur®, which hardens into ivorylike material. It can be colored with cold-dip dye.

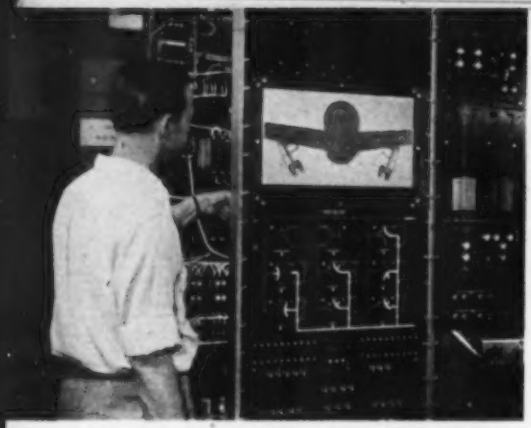

Operation of landing gear is simulated on metal silhouette. Below it, red lines show hydraulic pressure system; yellow, return flow.

Giant nose wheels on a Constitution are raised and lowered 20,000 times—just to make sure. Tests simulate actual weight and air resistance.

Flexing Air Giants' Muscles

LIKE a fighter flexing his muscles before a battle, giant Constitution Ⓣ transports are getting a chance to try out their "muscles" long before they will actually need them. These "muscles" are the complex hydraulic boosters that move the rudder, elevator, and ailerons and raise and lower the landing gear, multiplying the pilot's force on the controls as much as 45 times.

In Lockheed's California laboratories, the plane's entire hydraulic system is duplicated. First, the metal "nerves" carrying the high-pressure hydraulic fluid are vibrated millions of times to make certain the pipes and fittings will withstand the constant shaking of the plane's engines.

On a sheet-metal silhouette, the electrically operated valves that control the hydraulic boosters are carefully checked and timed. The boosters themselves are placed in a sealed chamber and forced to operate under temperatures that vary from 60° F. below zero to 160° F. above.

Still not satisfied, technicians then run the mechanisms thousands of times until they finally fail. This way, engineers make sure that when something goes wrong, it will happen on the ground—not 20,000 feet up.

Outside temperature chamber, operator sits at plane controls. Pointers show rudder and elevator deflection; gauge, hydraulic pressure.

Inside temperature chamber, technician studies equipment under test. Special suit is inflated with either hot or cold air to protect him.

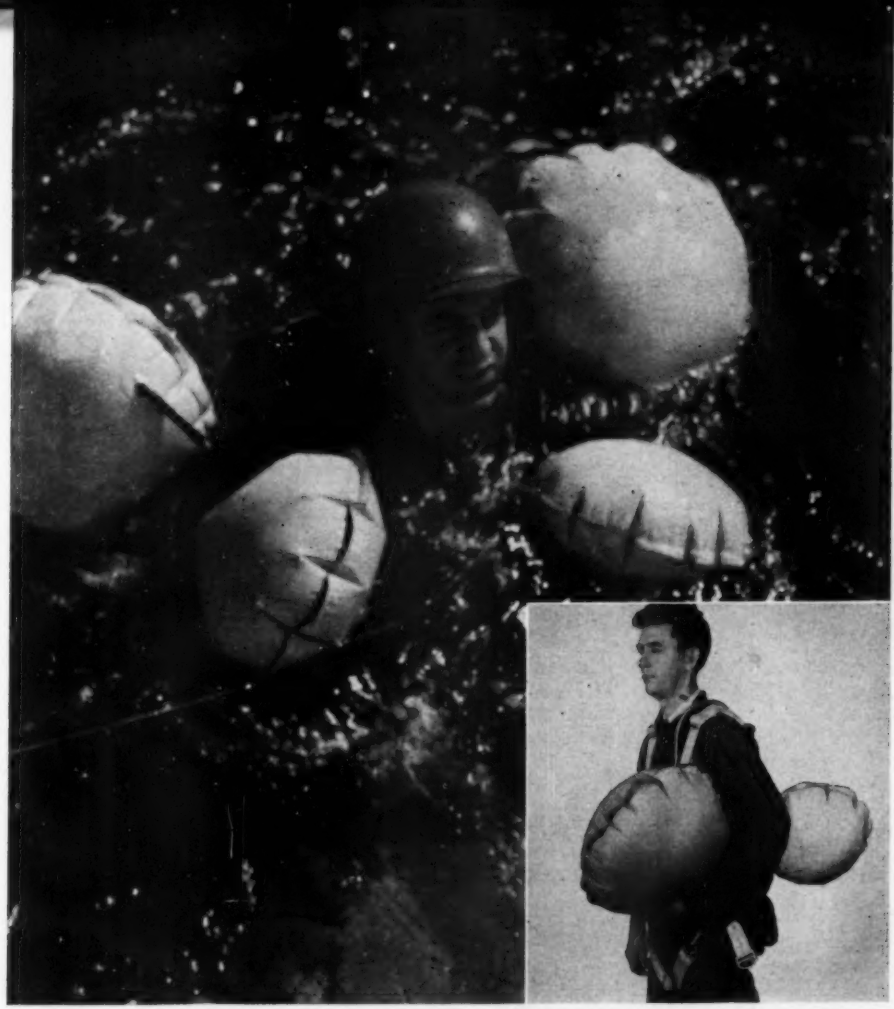

Army Tries Water Wings

A MAN-SIZED version of Junior's water wings may soon be coming to the rescue of paratroopers downed at sea. Being tested by the Army, the wings fit under the arms (inset) and will support 300 pounds of man and equipment, keeping the wearer's head well above water. Deflated, they fold flat under the armpits, out of the way of the parachute harness. Each is inflated from its own small cylinder of compressed air.

Tractor Does New Jobs

DRIVE a Ford tractor under a frame of bent tubing, fasten six bolts—and you have the power shovel shown at right. The frame, designed to increase the versatility of farm tractors, was demonstrated recently by Dearborn Motors at Clarkston, Mich. With various attachments, it enables a tractor to excavate and move dirt, stack baled hay, load manure, shovel grain into a bin, or clear away snowdrifts.

Youthful model assembler gets set to launch 9-inch, gas-propelled rocket along guide wire.

Rockets on Wires Hit 125 m.p.h.

TOYS, too, have entered the era of jet-propelled flight. Just like the real thing, the 9-inch rocket pictured above is powered by the thrust of compressed gas escaping from its tail.

In flight, the midget missile shoots along a guide wire for 200 to 1,000 feet at speeds up to 125 m.p.h. The propellant is non-burning carbon dioxide, which comes in cartridges like those used to charge soda-water bottles.

The rocket and a similar jet airplane, made of balsa wood, are sold unassembled and unpainted by Victor Stanzel & Co., of Schulenburg, Tex.

Rocket is set off by puncturing cartridge of carbon dioxide in tail with pointed plunger of "jet gun." Large hole, letting gas out fast, gives high speed; small hole, longer flight.



Rocket beats jet plane in race along parallel wires to frame of tubing mounted on car. They stop without damage when arresting hooks catch on rubber bands stretched across ends of frame.

Soft Shoes Save Soldiers

A SOLDIER wearing these sponge-rubber "snowshoes" to lighten his step has a 95-percent chance of crossing a mine field safely. Army engineers developed the new footgear at Ft. Belvoir, Va. Coverings of watertight fabric over their upper layers and rubber hoses strapped to the wearer's legs let the sponge-rubber pads "breathe" for resiliency when used to walk in water.

Ladder Weighs 8 Pounds

THOUGH easily lifted by a child, as you can see, this 8-pound ladder will support 1,000 pounds of working load. Its strength comes from the girder shape of the legs. The Featherweight®, 10 feet tall, is entirely aluminum, except for rubber pads on the feet, steps, and shelf. Made by Bardwell and McAlister, of Burbank, Calif., the ladder sells for about $11.50.

Bed Light Does Two Jobs

A NEW 10-foot Sylvania lighting unit, shielded at top and front by translucent plastic, provides both indirect illumination and direct light for reading in bed. Downward refraction of light by the plastic yields 15 foot-candles at book level. Separate switches control one 40-watt and two 20-watt fluorescent lamps, set end to end.

'Y' Strengthens Chair

STRIPS of laminated wood, serving as the frame of this new chair, are bent downward at the front corners and joined to form its front legs. This "Y" joint, shown in close-up, is said to double their strength by distributing the strain evenly in two directions. The chair was designed by Alvar Aalto, a Finnish architect now in the United States.

New Ideas from the Inventors

Autogyros Get a Lift. With this take-off device invented by H. F. Pitcairn, of Bryn Athyn, Pa., autogyros with unpowered rotors could take off straight up the way helicopters do. Compressed air, piped into the plane through a flexible hose, jets out through nozzles in the rotor, spinning the blades. As the plane rises, an underground reel pays out the hose. Once aloft, the plane drops the hose and flies off.

Bathing Harness Holds Dogs. If your dog-bathing sessions end up with more water on you than the dog, you'll probably go for this invention of F. L. Short, of New York City. It's a frame that fits inside the bathtub and holds the dog firmly in place with cross straps. Adjustable, rubber-tipped screws make it fit tightly in any tub.

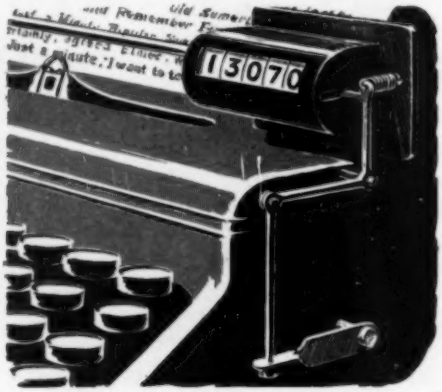

Typewriter Counts Words. For writers who must write to an exact length, C. W. Lamb, of Inskip, Tenn., has patented a word counter for typewriters. It chalks up a word the first time the space bar is hit after each word. It then disconnects and is reset only when another letter key is hit. Thus extra spaces do not register as words.

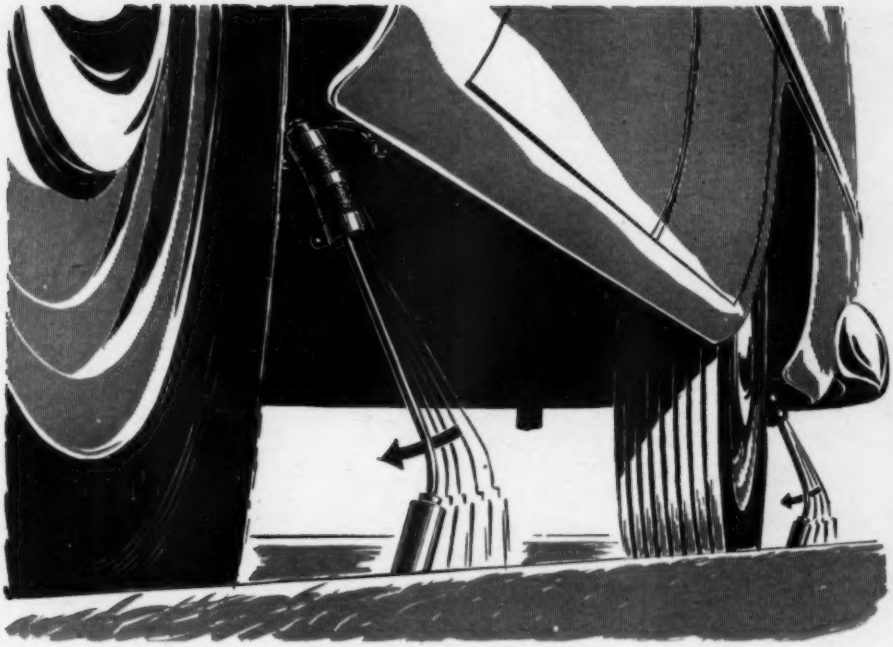

Curb "Feelers" Save Tires. You won't scrape your tires when you drive up to a curb with these "feelers" invented by E. Sines, of Toledo, O. Extending slightly beyond the fenders, the flexibly mounted, roller-tipped arms touch the curb first and are pressed inward as the car moves closer. This closes a switch, flashing lights on the car's dashboard to warn the driver that a curb, wall, or other obstruction is near.

Picker Speeds Berrying. There'd be no bending over or one-handed picking with this berry-picking aid patented by R. E. Faulkner, of Chicago. As fast as the berries can be picked, they are dropped into curved cups strapped on the picker's wrists, and flexible tubes carry them down to a pail on a harness around the picker's waist.

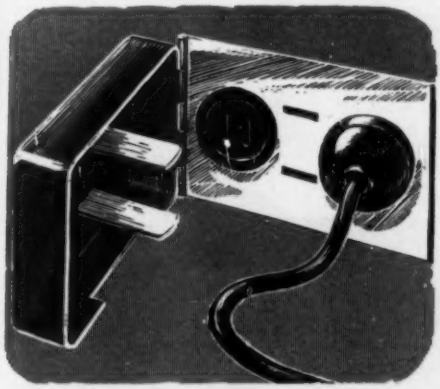

Sockets Are Shockproof. Even if Junior managed to open this safety cover for electrical outlets, he still couldn't get a shock. As the hinged cover opens, its two prongs are pulled out of a socket between the outlets. This cuts off the current until the cover is again closed. It was invented by H. A. Abraham, of Philadelphia.

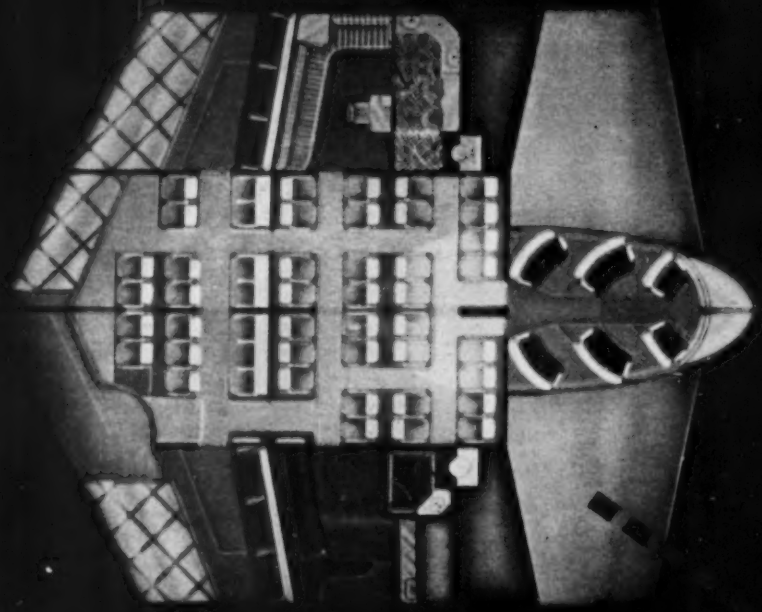

Overhead view shows seating arrangement in proposed all-wing airliner. Forty passengers in center cabin and the lounges on both sides of it might look out through windows built into floor.

In forward-vista cabin (below), under pilots' and engineer's compartment, 30 passengers would see ahead through transparent plastic reinforced to form the leading edge of the wing at its nose.

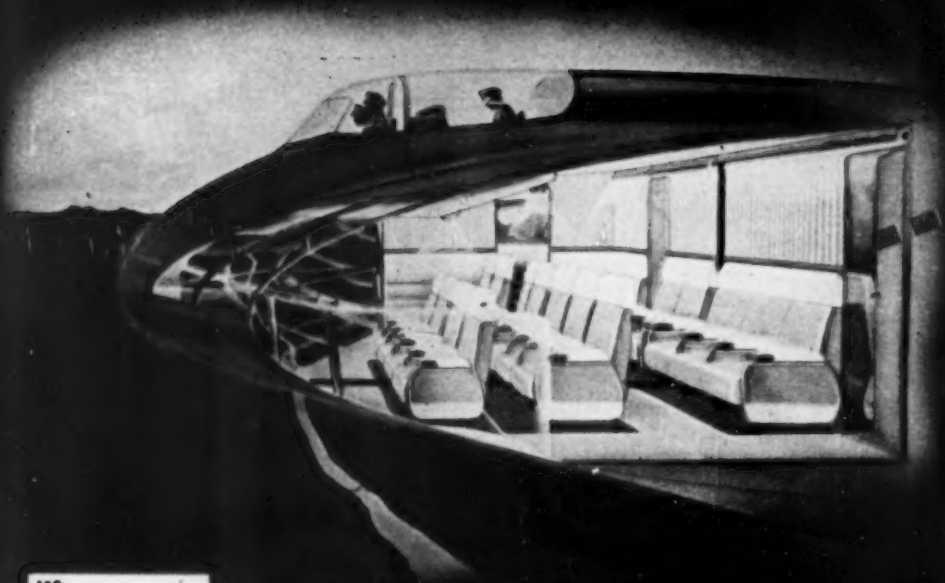

Tail cone, in place of the pointed blister in bomber versions of the flying wing, would carry 10 passengers facing backward in three tiers of seats with views to rear, both sides, and overhead.

40-Ton Flying Wing To Carry 80 People

THE MAN who designed the flying-wing bomber has now completed plans for an air liner of the same size and shape.

These drawings show how designer Jack Northrop sees it: a 172-foot wing that would stand 15 feet high and weigh 40 tons empty. Eighty passengers would ride in it, 100 m.p.h. faster—he figures—than in conventional air liners of the same weight and power.

Though Northrop has no plans for producing it soon, the all-wing air liner is no mere drawing-board fantasy. Behind it lie test flights of its prototype, his XB-35, and that bomber's jet-driven sister, the YB-49. It would differ from them mainly in having passenger cabins where they are rigged to carry bombs. Like the bombers, the air liner would have no tail. Trailing edges of the wing would serve as combination elevators and ailerons. Vertical air separators would increase directional stability.

The flying-wing liner could be driven by jet engines—as shown here—or propellers.

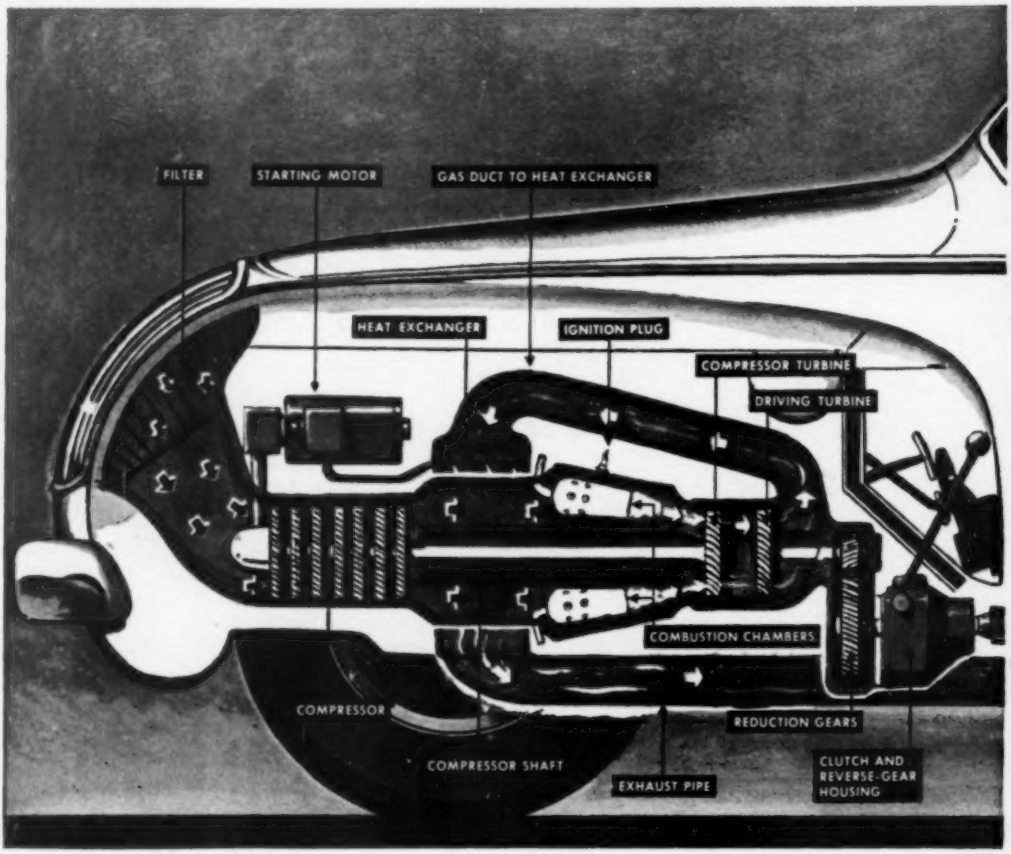

Gas from combustion chambers rotates separate turbines for air compressor and drive shaft.

Turbine Designed for a Car

A NEW era in motoring was foreshadowed by the exhibition recently in Birmingham, England, of the first gas-turbine engine designed for automobiles.

Still in the early stages of development, the new turbine (PS, Aug. '48, p. 154) weighs about a third as much as a piston engine of the same power. And it will burn, as one of its designers put it, almost any kind of oil "from kerosene to old candle ends." Main disadvantage: high fuel consumption.

Basically, the gas turbine for automobiles is a small version of those now used in high-speed combat airplanes. The drawing at the top of this page, based on sketches published by the *London Illustrated News,* shows how it would work in a car.

A compressor, turned by an electric motor for starting, sucks air from the atmosphere through a filter and blows it into combustion chambers. There a spray of fuel oil mixes with the compressed air and, once set afire by an ignition plug, burns fiercely.

Flaming gas, escaping from the combustion chambers, rotates two turbines. The first turns the air compressor; the second, on a separate shaft, is geared to the car's rear wheels.

The partly cooled gas then goes back to a compartment called a heat exchanger, where—on its way out—it preheats incoming air. This not only steps up the engine's fuel-burning efficiency, but helps to muffle its jetlike exhaust.

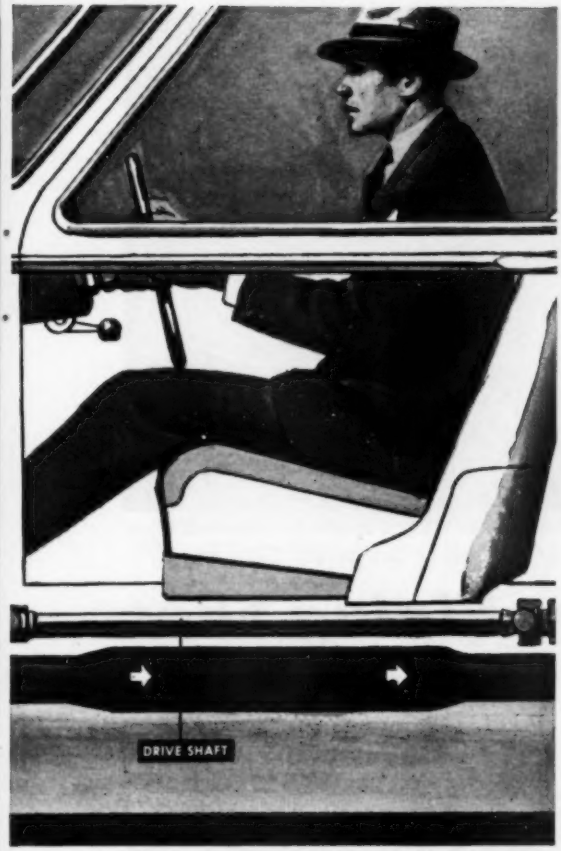

Black arrows show air flow; white arrows, gas.

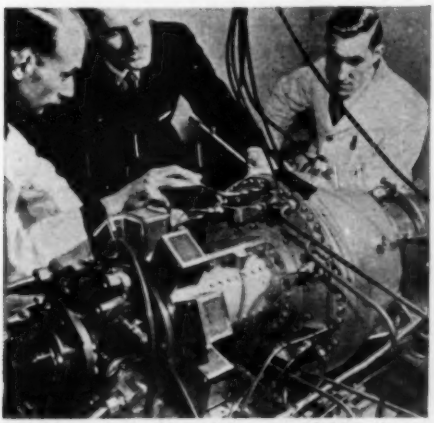

British gas turbine for automobiles, shown with its inventors, weighs only 300 pounds but develops 160 hp. It's about three feet long and has a maximum diameter of 15 inches.

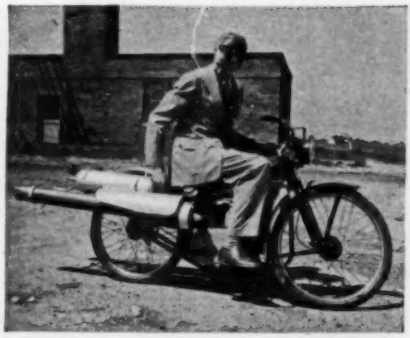

Baby Jet Drives Bike

JET manufacturers are losing no time in developing peacetime models for the public's use. First on the market is a baby pulse jet that weighs only 8¾ pounds yet develops a static thrust of 30 pounds—enough to send the motorbike above zooming along at better than 70 m.p.h. Called the D5-1, it burns ordinary gasoline and is started by a coil vibrator and compressed air. It is made by the Aeromarine Co., of Vandalia, Ohio.

Camera Tests Lenses

YOU won't find this camera out at the beach this summer snapping candids, but because of it, your own cameras will be getting better. Developed by Bausch and Lomb, it's interested only in testing new lenses for other cameras. For the utmost in precision, film plane and lens board can be kept parallel to within 5/10,000 of an inch. A micrometer affords similar accuracy in focusing, while a built-in microscope permits even finer focusing.

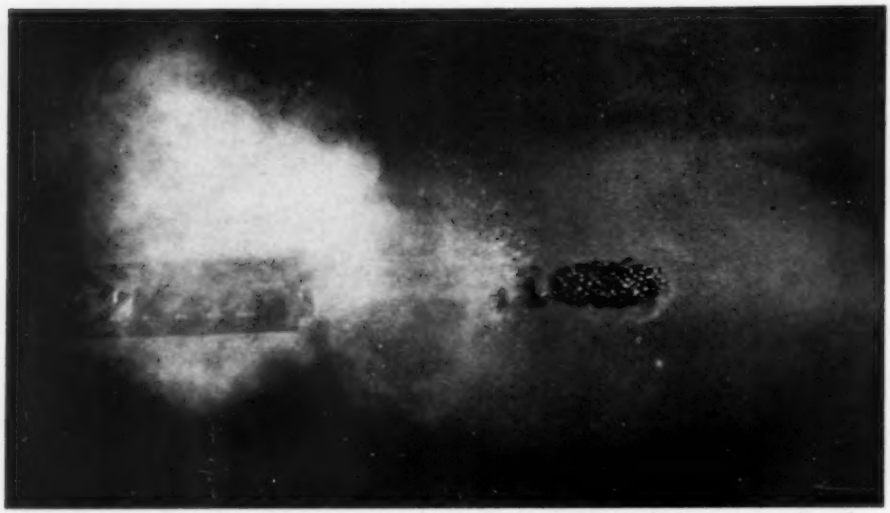

Charge of shot, traveling 1,400 ft. a second, is photographed 4 in. from gun's choke-tube extension. Vents in tube let out gases that otherwise would cloud camera's view of the pellets.

Camera Snaps Flying Shot

AT THE top of this page is a portrait of lead pellets leaving a shotgun at 954 m.p.h. They were snapped by an ordinary Speed Graphic Ⓣ camera in the studio of E. Baden Powell at Pasadena, Calif.

The secret? It's in the lighting, a flash 1,000 times brighter than outdoor sunlight. The source is two pencil-shaped quartz tubes, filled with xenon gas, that light up and black out in 3/1,000,000 of a second.

It takes 28,800,000 watts to flash the tubes. A series of multipliers builds up these baby lightning bolts from house current and stores them in condensers. They are released when a switch is tripped by sound from a gun's blast striking a microphone.

The switch is a gas-filled electronic tube, called a thyratron. It works like a valve, letting current through when it receives the microphone's signal and then quickly shutting it off as the current "pressure" drops. The mike's distance from the gun determines at what point the shot is photographed.

Powell uses this camera setup to test his POWer-PAC Ⓣ, a shotgun muzzle attachment to control the pattern of shot.

To take pictures like one at top of this page, room lights are turned off and camera shutter is opened. Shotgun is then fired into target of rags in end of pipe. Microphone near muzzle trips camera lights when it "hears" blast. Duration of their flash is length of exposure.

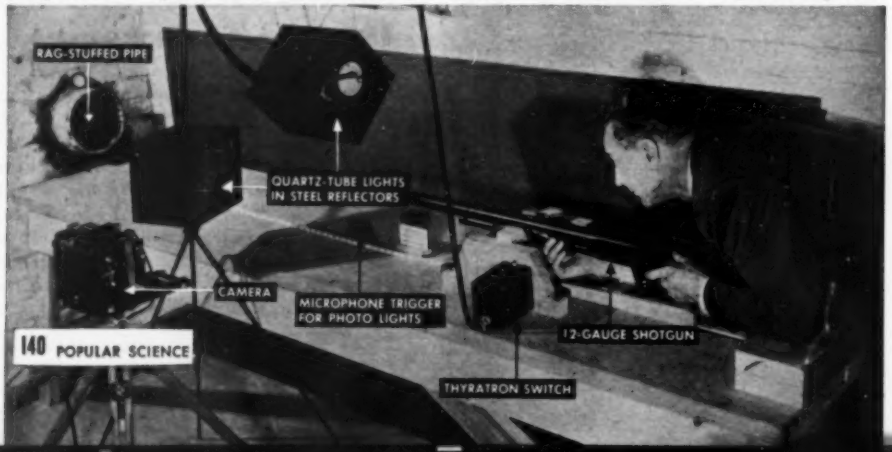

Photo by Western Ways

Navajo Makes Jewelry

His ancient skill aided by simple shop tools, a Navajo Indian craftsman fashions silver mountings for a turquoise bracelet. He buys the metal in sheets or as Mexican coins. Enough for each setting, weighed in a homemade balance scale, is melted over a gas burner and cast in a mold of wet sand.

Lamp Houses Radio

To save space on a desk, this lamp has a radio built into its base. An RCA-licensed, four-tube superheterodyne, the radio has a selenium rectifier to take the place of a fifth tube. It operates on AC or DC. The lamp is 26 inches tall and made largely of brass. A matching lamp comes without the radio. The manufacturer is Lombardy Lamps, Ltd., Long Island City, N. Y.

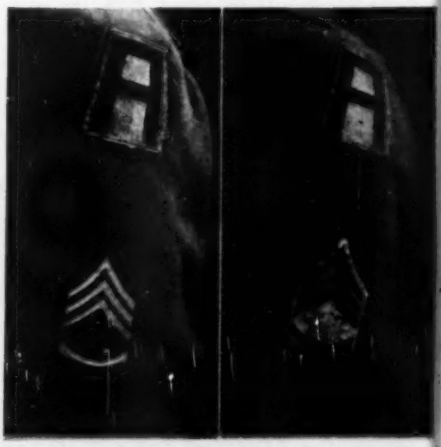

Colors Identify Troops

Now you can tell by the colors on his sleeve whether a soldier is a combat man or a technician. The photographs above show the Army's new color scheme for noncommissioned officers: gold stripes on a blue background for non-combat personnel, blue on gold for combat troops. The new emblems, only 2 inches wide, are about two-thirds the size of the old insignia.

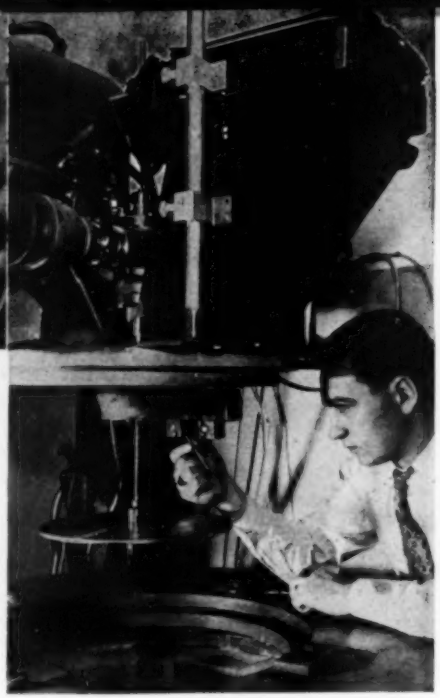

Camera Snaps Jet Flaws

How much punishment can the blades of a jet engine take? To find out, Boeing engineers place test wheels in the spin pit at the bottom of the picture at right and whirl them at speeds up to 100,000 r.p.m. under temperatures as high as 1,750° F. When a wheel breaks, a tiny mercury flash lamp, shown being installed at right, is set off, making a 1/5,000,000-second photograph on film in an 8-by-10 camera mounted above the pit. The photo above was snapped as a wheel burst at 52,000 r.p.m.

Taxi Gives Tele Shows

You can see the fight, even though you are stalled in a traffic jam outside the gate, if you're lucky enough to hop into this Chicago cab. The set is a Motorola table model, modified by a television engineer, and set beside the driver so that the 4¾-by-6-inch screen is visible from the rear seat. Requiring only 70 watts of power, the set has a special vibrator that permits its operation without added battery power. The antenna designed for the job is shown at the right. The whole thing cost only $200.

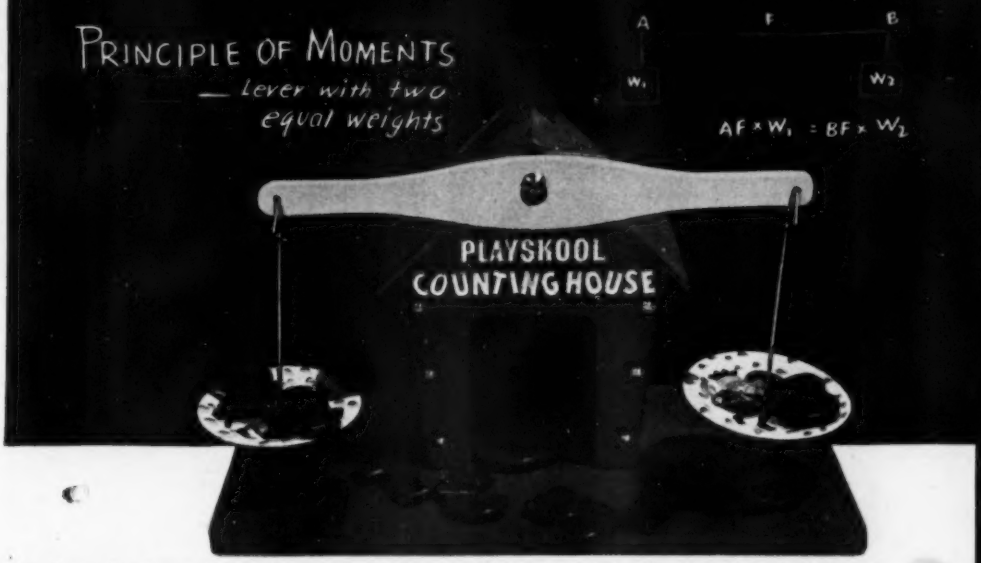

Simple scale shows that only equal weights balance at equal distances from the point of support, or fulcrum. This is based on law of moments: ability to make a body rotate about an axis is measured by multiplying the force used by its distance from the axis. The Counting House (T), made by Playskool Mfg. Co., also teaches addition: the counters are shaped like numbers proportionate to their weight, so that the 2 and the 4 are exactly balanced by the 6.

Toys Dramatize Science

THE laws of science rule the nursery as well as the laboratory, and many a profound physical principle is dramatically demonstrated by a toy. Here are half a dozen in which Junior has gotten an assist from heavyweight thinkers like Archimedes and Sir Isaac Newton. They were selected at the Toy Guidance Exhibit, Inc., of New York City, an information and display center for the toy industries and educators.

Color top employs additive mixing of hues. Red and blue sections of the top blend to appear pink when the top is spun. The eye sees a fraction of the light from each color as it whirls and adds up the wave lengths in the brain. Blackboard formula shows that if green were added, top, made by Falge Engineering Service, of Bethesda, Md., would spin white.

"A simple train of gears is one in which each gear meshes with the next one; each gear being a follower of the one preceding and a driver of the one following"—as this simple toy demonstrates. Gears and pegs are removable and can be given different positions by shifting to extra holes in the board. Paul Bonhop, Inc., of New York City, makes the gear-train set.

In this toy pump, just as in a full-sized one, the pressure of the atmosphere on the surface of the well water forces the fluid up into the pump. This happens when pushing down the pump handle raises the piston, lowering the air pressure in the pump cylinder. The up stroke on the handle then pushes the piston down and the water passes through a valve in the piston. The next stroke then lifts it to the spout. In the toy, made by Ideal Novelty and Toy Co., a little water poured through hole in pump top gives an endless supply for pumping.

Perfectly balanced on its stand, the spinning gyroscopic top above demonstrates that a rotating body persists in the plane of its rotation, unless affected by an outside force. This law of motion was first explained by Sir Isaac Newton. Formula on blackboard is for gyro's precessional velocity. Weight of top and push of pivot are equal; the two forces thus form a couple, and top does not fall. The toy, made of plastic, is spun by pulling a string, which is first wound around the axis. Toy Founders, Inc., of Detroit, Mich., manufactures it.

This crane uses one of the most valuable tools with which science has equipped industry—the electromagnet. The French physicist Arago first showed in 1820 that winding a soft iron core with wire carrying a current makes a powerful magnet. This one, battery-operated from the cab, will lift 10 lb. of iron. The toy also demonstrates the mechanical advantage of the pulley. Since each rope hitched to the pulley on the crane exerts a pull equal to half the weight of the load, it has an advantage of 2 to 1. Tech-Art, Inc., of Milford, O. makes the toy.

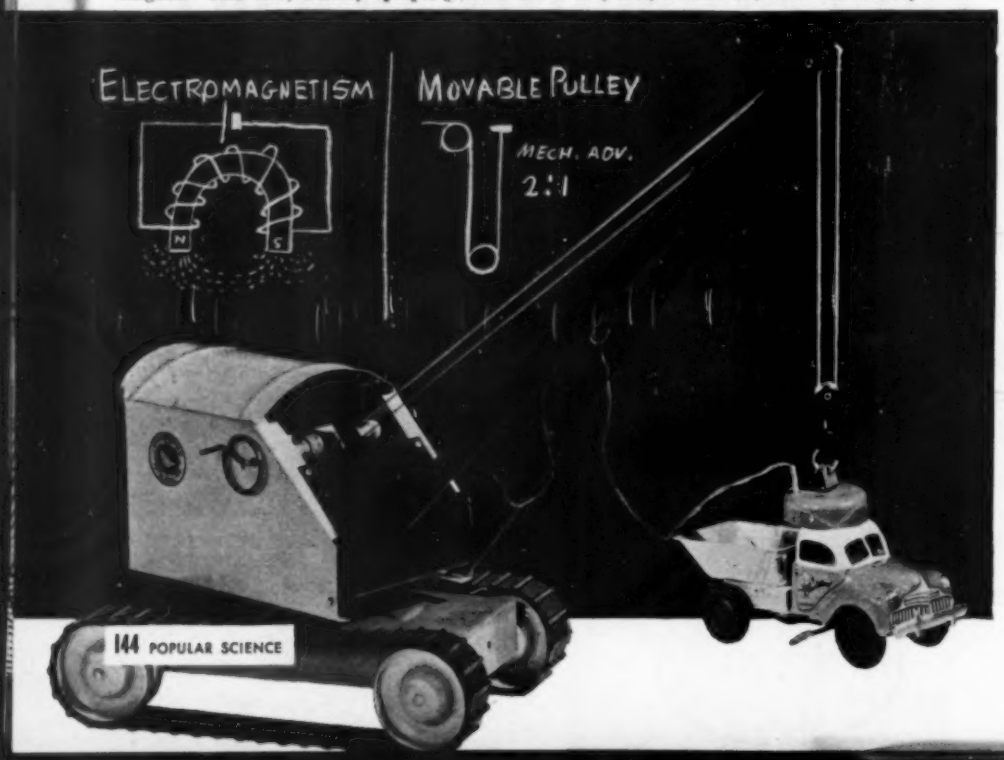

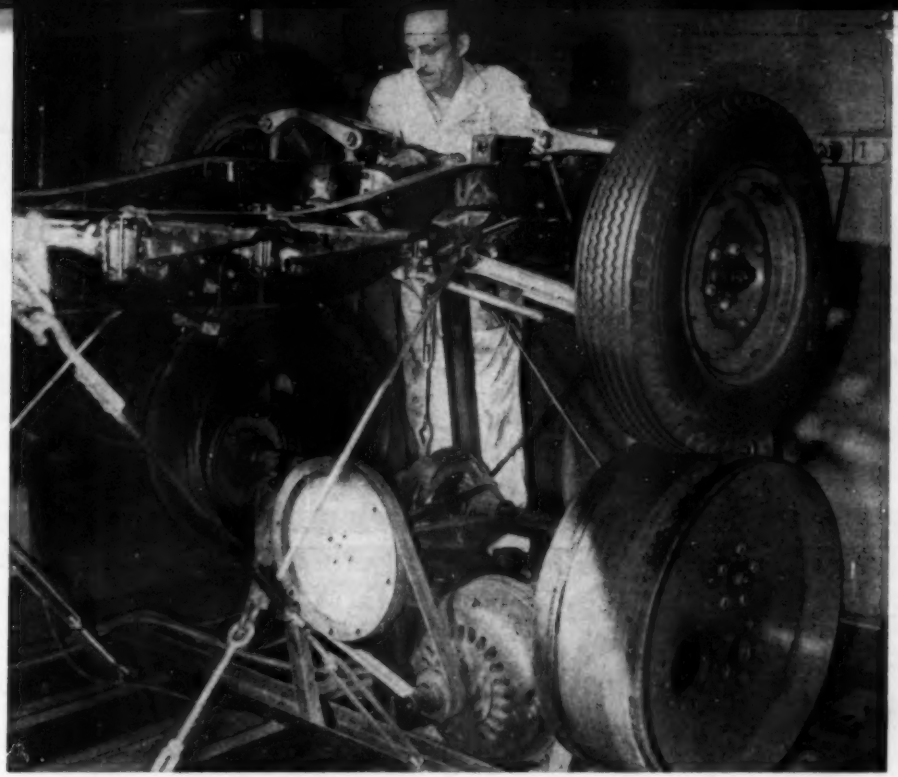

Bouncer Tests Springs

THE motorized bump shown above is part of Kaiser-Frazer's indoor proving ground for proposed changes in automobile design. Its whirling drums, set off center, spin the car wheels mounted above them and, at the same time, alternately shove one wheel up while letting the other drop. This tests springs and shock absorbers by putting them through more punishment than they're ever likely to encounter on the road.

Glass Tube Samples Steel

THE picture below shows how GE's oversize "medicine dropper" samples molten steel. Squeezing a rubber bulb on its upper end sucks liquid metal from a dipper into a tube of heat-resistant glass about the diameter of a lead pencil. The steel hardens in five minutes, and the glass is cracked away—leaving a smooth rod for analysis.

Phone Aid Frees Hands

JUST flip the switch of the Tel-O-Aid ⓣ when the phone rings—and you can talk, with both hands free and work uninterrupted. Both sides of the conversation can be heard anywhere in the room. The receiver rests on the cabinet, plugged into any outlet, but has no mechanical connection with it. Outgoing calls are dialed as usual.

DAGWOOD Splits the Atom

TO MAKE atomic energy easier to understand, this comic strip was prepared for an exhibit celebrating New York City's Golden Anniversary. Artist Joe Musial was aided by Dr. John R. Dunning, Nobel prize winner and Columbia University science director; Dr. Louis Heil of Cooper Union; Dr. Maxwell L. Eidinoff, author of "Atomics for the Millions"; representatives of "Puck"; and a group of science journalists.

Pictures reproduced by permission of King Features Syndicate, Inc.

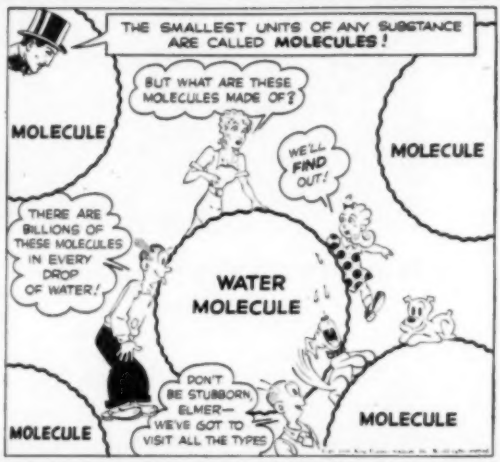

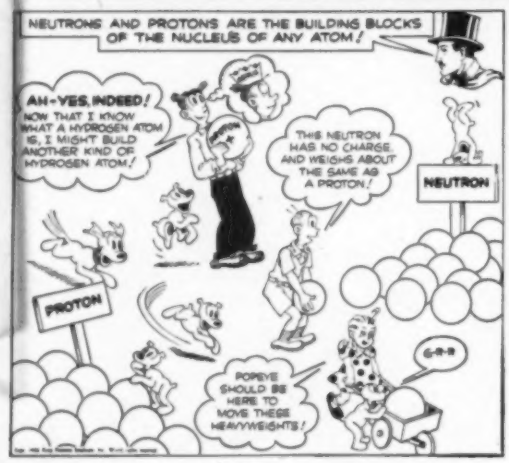

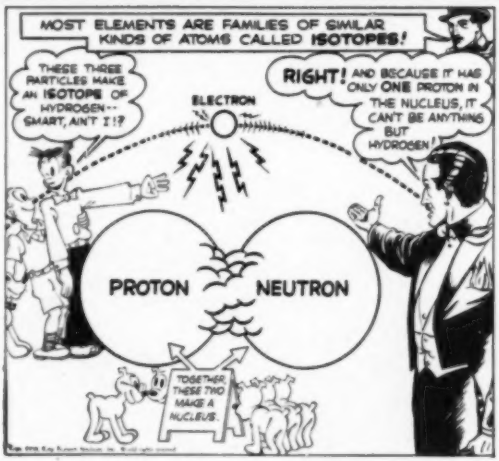

AND NOW, LADIES AND GENTLEMEN – SO THAT YOU CAN SEE WHAT AN ATOM IS, AND HOW IT LOOKS – THE BUMSTEADS HAVE VOLUNTEERED TO LET ME REDUCE THEM TO THE SIZE OF ATOMS, AND SEE WHAT WONDERFUL COMPANIONS ATOMS ARE!
OH BOY- I ALWAYS SAID I WAS CUT OUT TO BE AN ACTOR, BLONDIE!
YIP-EE-EEE
I'M SMALL ENOUGH TO CRAWL THROUGH A KEYHOLE!
HA-HA HO-HO HA
NOW, I MUST REDUCE YOU BUMSTEADS STILL FURTHER -- WHEN YOU COME OUT, YOU'LL LAND ON MY WRIST WATCH!
OKAY- LET'S GO!
REDUCING FLUID
THIS IS FUN- LET'S DO IT AGAIN!
HEY, MANDRAKE! WE'RE STILL SHRINKING-
YES, I KNOW.

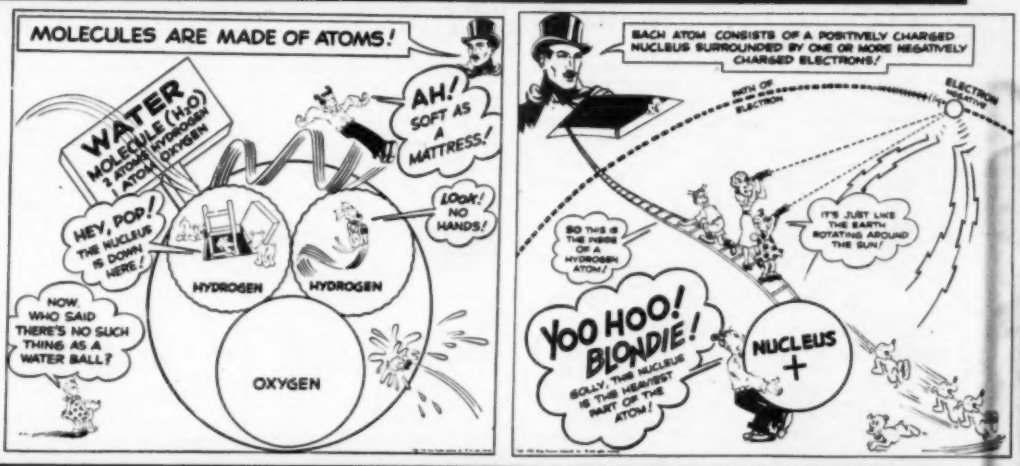
MOLECULES ARE MADE OF ATOMS!
WATER MOLECULE (H_2O) 2 ATOMS HYDROGEN 1 ATOM OXYGEN
AH! SOFT AS A MATTRESS!
HEY, POP! THE NUCLEUS IS DOWN HERE!
LOOK! NO HANDS!
HYDROGEN
HYDROGEN
OXYGEN
NOW, WHO SAID THERE'S NO SUCH THING AS A WATER BALL?
EACH ATOM CONSISTS OF A POSITIVELY CHARGED NUCLEUS SURROUNDED BY ONE OR MORE NEGATIVELY CHARGED ELECTRONS!
PATH OF ELECTRON
ELECTRON NEGATIVE
SO THIS IS THE INSIDE OF A HYDROGEN ATOM!
IT'S JUST LIKE THE EARTH ROTATING AROUND THE SUN!
YOO HOO! BLONDIE!
SOLLY, THE NUCLEUS IS THE HEAVIEST PART OF THE ATOM!
NUCLEUS +

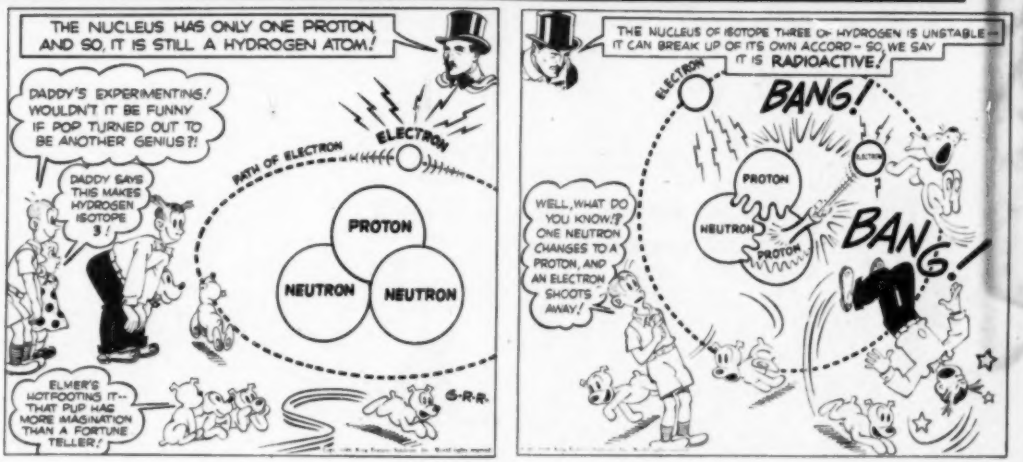
THE NUCLEUS HAS ONLY ONE PROTON, AND SO, IT IS STILL A HYDROGEN ATOM!
DADDY'S EXPERIMENTING! WOULDN'T IT BE FUNNY IF POP TURNED OUT TO BE ANOTHER GENIUS?!
DADDY SAYS THIS MAKES HYDROGEN ISOTOPE 3!
PATH OF ELECTRON
ELECTRON
PROTON
NEUTRON
NEUTRON
ELMER'S HOTFOOTING IT-- THAT PUP HAS MORE IMAGINATION THAN A FORTUNE TELLER!
G-R-R-
THE NUCLEUS OF ISOTOPE THREE OF HYDROGEN IS UNSTABLE – IT CAN BREAK UP OF ITS OWN ACCORD – SO, WE SAY IT IS RADIOACTIVE!
ELECTRON
BANG!
PROTON
NEUTRON
PROTON
BANG!
WELL, WHAT DO YOU KNOW!? ONE NEUTRON CHANGES TO A PROTON, AND AN ELECTRON SHOOTS AWAY!

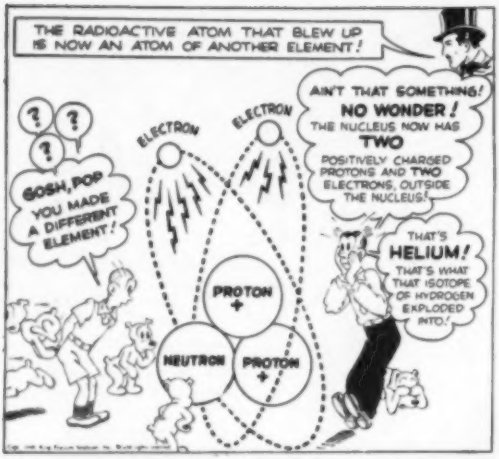
THE RADIOACTIVE ATOM THAT BLEW UP IS NOW AN ATOM OF ANOTHER ELEMENT!
GOSH, POP YOU MADE A DIFFERENT ELEMENT!
ELECTRON
ELECTRON
PROTON +
NEUTRON
PROTON +
AIN'T THAT SOMETHING! NO WONDER! THE NUCLEUS NOW HAS TWO POSITIVELY CHARGED PROTONS AND TWO ELECTRONS, OUTSIDE THE NUCLEUS!
THAT'S HELIUM! THAT'S WHAT THAT ISOTOPE OF HYDROGEN EXPLODED INTO!

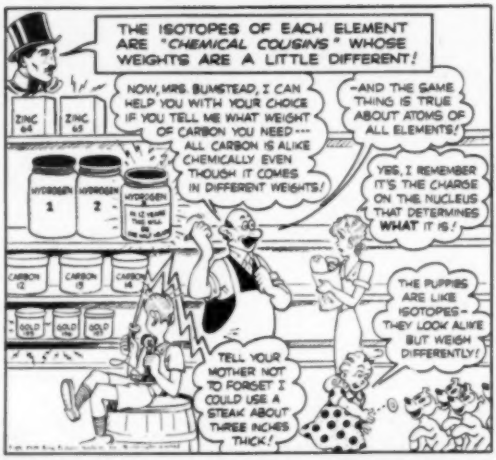
THE ISOTOPES OF EACH ELEMENT ARE "CHEMICAL COUSINS" WHOSE WEIGHTS ARE A LITTLE DIFFERENT!
ZINC 64
ZINC 65
NOW, MRS. BUMSTEAD, I CAN HELP YOU WITH YOUR CHOICE IF YOU TELL ME WHAT WEIGHT OF CARBON YOU NEED--- ALL CARBON IS ALIKE CHEMICALLY EVEN THOUGH IT COMES IN DIFFERENT WEIGHTS!
-AND THE SAME THING IS TRUE ABOUT ATOMS OF ALL ELEMENTS!
HYDROGEN 1
HYDROGEN 2
HYDROGEN
YES, I REMEMBER IT'S THE CHARGE ON THE NUCLEUS THAT DETERMINES WHAT IT IS!
CARBON 12
CARBON 13
CARBON 14
GOLD 196
GOLD 197
GOLD 198
THE PUPPIES ARE LIKE ISOTOPES - THEY LOOK ALIKE BUT WEIGH DIFFERENTLY!
TELL YOUR MOTHER NOT TO FORGET I COULD USE A STEAK ABOUT THREE INCHES THICK!

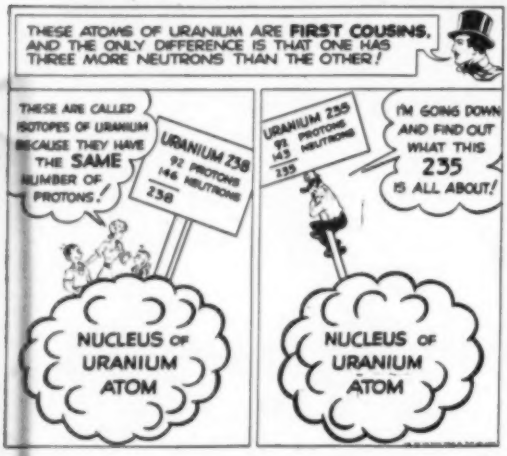
THESE ATOMS OF URANIUM ARE FIRST COUSINS, AND THE ONLY DIFFERENCE IS THAT ONE HAS THREE MORE NEUTRONS THAN THE OTHER!
THESE ARE CALLED ISOTOPES OF URANIUM BECAUSE THEY HAVE THE SAME NUMBER OF PROTONS!
URANIUM 238 92 PROTONS 146 NEUTRONS 238
NUCLEUS OF URANIUM ATOM
URANIUM 235 92 PROTONS 143 NEUTRONS 235
I'M GOING DOWN AND FIND OUT WHAT THIS 235 IS ALL ABOUT!
NUCLEUS OF URANIUM ATOM

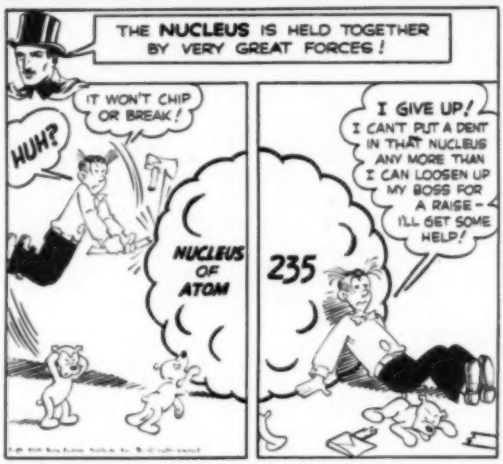
THE NUCLEUS IS HELD TOGETHER BY VERY GREAT FORCES!
HUH?
IT WON'T CHIP OR BREAK!
NUCLEUS OF ATOM
235
I GIVE UP! I CAN'T PUT A DENT IN THAT NUCLEUS ANY MORE THAN I CAN LOOSEN UP MY BOSS FOR A RAISE - I'LL GET SOME HELP!

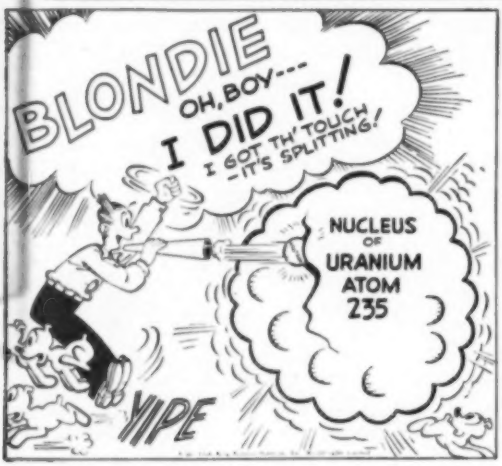
BLONDIE
OH, BOY--- I DID IT! I GOT TH' TOUCH -IT'S SPLITTING!
NUCLEUS OF URANIUM ATOM 235
YIPE

U 235 ATOM SPLITS! TWO LARGE RADIOACTIVE ATOMIC FRAGMENTS FLY APART VIOLENTLY! -SEVERAL NEUTRON BULLETS SHOOT OUT! MILLIONS OF ELECTRON VOLTS OF ENERGY ARE RELEASED!
CAN YOU TIE THAT? I MADE A HIT WITH ONE NEUTRON, AND AFTER IT SPLIT, THERE ARE NOW THREE OF 'EM!
SMACK
NEXT!
NEUTRON
NEUTRON
NEUTRON
PHOOEY!

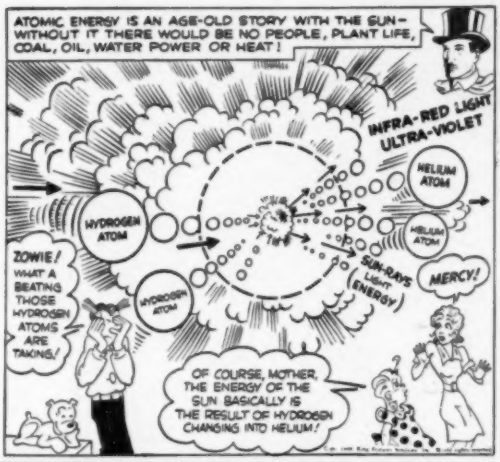
ATOMIC ENERGY IS AN AGE-OLD STORY WITH THE SUN—WITHOUT IT THERE WOULD BE NO PEOPLE, PLANT LIFE, COAL, OIL, WATER POWER OR HEAT!
INFRA-RED LIGHT
ULTRA-VIOLET
HELIUM ATOM
HYDROGEN ATOM
HELIUM ATOM
HYDROGEN ATOM
SUN-RAYS (LIGHT ENERGY)
ZOWIE! WHAT A BEATING THOSE HYDROGEN ATOMS ARE TAKING!
MERCY!
OF COURSE, MOTHER, THE ENERGY OF THE SUN BASICALLY IS THE RESULT OF HYDROGEN CHANGING INTO HELIUM!

ALL ATOMS ARE MADE OF PROTONS, NEUTRONS & ELECTRONS!
IF I PUT THE RIGHT NUMBER OF NEUTRONS, PROTONS AND ELECTRONS TOGETHER, I'LL HAVE CARBON-- DIAMONDS ARE A FORM OF CARBON-- HMM!
NEUTRONS
OH, WHY DO I WASTE MY TIME IN AN OFFICE, WHEN, IF I CAN PUT THESE THREE KINDS OF BUILDING BLOCKS TOGETHER IN THE RIGHT COMBINATION, I CAN MAKE GOLD!- WHY, I'D BE IN THE DOUGH--- A MILLIONAIRE!— ---I MEAN, A BILLIONAIRE! OH, BLONDIE!
GOLLY- I'M GOING TO TRY TO BUILD SOME OF THAT URANIUM STUFF WE HEAR SO MUCH ABOUT!
ELECTRONS
PROTONS

GR-R-R- NOT EVEN A SCRATCH!
WE'VE BEEN TRYIN' TO SPLIT THAT THING FOR HOURS!
YEAH! LET'S EAT!
I QUIT!
NUCLEUS OF URANIUM ATOM 235
OH, WHY DO I LET MYSELF IN FOR THINGS LIKE THIS?
LET'S GIVE UP, DAGWOOD! WIT'OUT ME SPINACH I AIN'T GOT ME STRENGK!
TELL IT TO THE MARINES, POPEYE!
WHAT THEY NEED IS--- ---ADVICE

UNCHARGED NEUTRONS ARE THE MAGIC BULLETS WHICH CAN SPLIT THE URANIUM 235 NUCLEUS EASILY!
TRY THIS NEUTRON BAZOOKA- IN IT I'VE PLACED A SINGLE NEUTRON- AND IF YOU BLOW JUST RIGHT I THINK YOU CAN SPLIT THAT URANIUM ATOM!
CYCLOTRON MFG CO.
NEUTRON
NOW HE TELLS ME!
NUCLEUS OF URANIUM ATOM 235

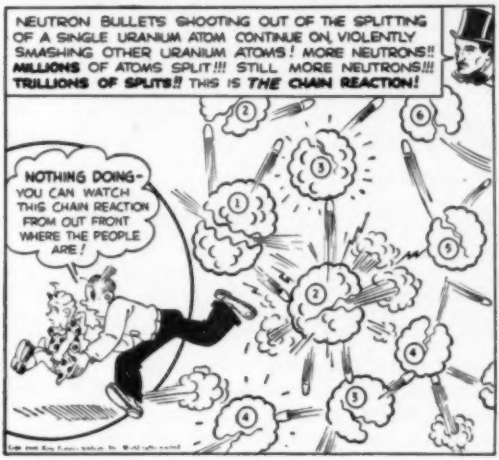
NEUTRON BULLETS SHOOTING OUT OF THE SPLITTING OF A SINGLE URANIUM ATOM CONTINUE ON, VIOLENTLY SMASHING OTHER URANIUM ATOMS! MORE NEUTRONS!! MILLIONS OF ATOMS SPLIT!!! STILL MORE NEUTRONS!!! TRILLIONS OF SPLITS!! THIS IS THE CHAIN REACTION!
NOTHING DOING- YOU CAN WATCH THIS CHAIN REACTION FROM OUT FRONT WHERE THE PEOPLE ARE!

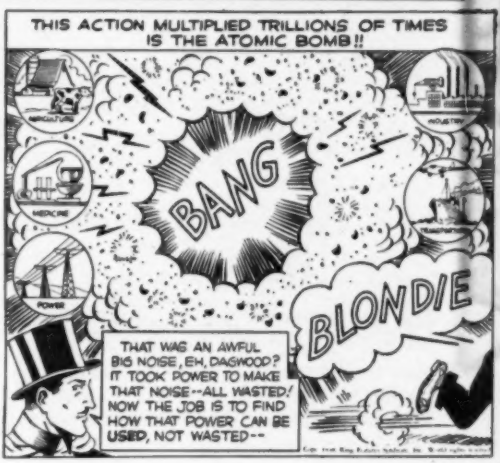
THIS ACTION MULTIPLIED TRILLIONS OF TIMES IS THE ATOMIC BOMB!!
AGRICULTURE
INDUSTRY
MEDICINE
TRANSPORTATION
POWER
BANG
BLONDIE
THAT WAS AN AWFUL BIG NOISE, EH, DAGWOOD? IT TOOK POWER TO MAKE THAT NOISE--ALL WASTED! NOW THE JOB IS TO FIND HOW THAT POWER CAN BE USED, NOT WASTED--

What's New in Aviation

Visibility Increased. Two windows on top of the cabin plus a rear window make it easy to see out of this 1949 Silvaire Sedan ⓣ even though it is a high-wing plane. The new Luscombe four-seater also features a luxurious interior, with individual cigarette lighters, ash trays, and fresh-air ventilators. Powered by a 165-hp. Continental engine, the plane has a top speed of 140 m.p.h., and climbs 900 ft. a minute.

Huge Tires Pack Soil. A solidly packed base is needed to build runways that will take the impact of heavily loaded aircraft. The packing can be done now with the Super-Compactor ⓣ shown above. When the corner compartments are filled with ballast, the four big boxed-in tires exert a total pressure of 400,000 lb. Cylindrical attachment in right foreground is a hydraulic jack for testing the strength of the packed soil. The unit is manufactured by O. J. Porter and Co., of Sacramento, Calif.

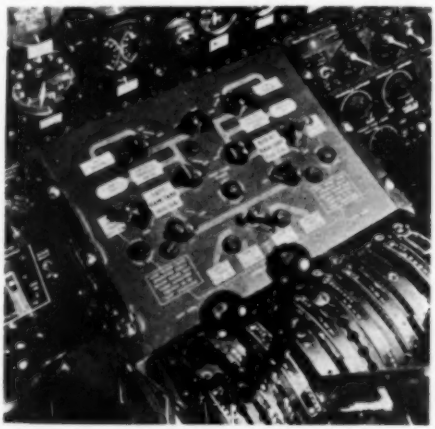

Fuel Flow Is Visible. With gas feeding from eight tanks into four engines, pilots of the Martin P4M Mercator now have an instant picture of what's going on at all times. They see it in the illuminated fuel panel shown above, made of transparent plastic. Mounted directly ahead of the throttles, it gives each pilot a clear view of which tanks are feeding which engines. The Mercator is the newest of the Navy's land-based patrol planes, and has a reciprocating and a jet engine in each of its two nacelles.

Television From the Sky. Inside a modified B-29 flying at 25,000 feet, engineers (right) are shown monitoring the first public demonstration of Stratovision near Pittsburgh, Pa. The program televised was picked up from an East Coast network by the antenna sticking up above the tail of the plane and rebroadcast from the long, mast-like antenna projecting below the nose. Flying lazily in the sky, the plane transmitted over an area more than 500 miles in diameter—about ten times the range of a ground station. Westinghouse and Glenn Martin engineers, who developed Stratovision, claim that 14 such aerial stations could span the nation with television programs.

British Bantam Takes Off. Weighing about as much as a motorcycle, the 430-pound Fairey Junior shown above does 35 miles to the British gallon. Carrying 11 gallons of fuel, it can fly non-stop from London to Paris at a cruising speed of 66 m.p.h. Recently demonstrated, the tiny one-seater is expected to sell in England for $2,000.

Mechanical Throat Makes Wind Blow 3,000 M.P.H.

Test model of a guided missile is placed inside flexible-throated, supersonic wind tunnel. Air squeezed through throat will smash past model at velocities up to four times the speed of sound.

THE Army's newest wind tunnel has a throat as flexible as your own. As a result, it can reproduce any air speed up to four times that of sound at the touch of a couple of push buttons. With it, engineers can test models of supersonic aircraft and guided missiles at continually varying velocities without stopping to change from one fixed throat to another.

The throat is the vital part of the tunnel, since high air speeds are obtained by suddenly squeezing the air through the narrow opening, forcing it to speed up. In the new tunnel, installed at the Army's Aberdeen (Md.) Proving Ground, the throat consists of flexible steel plates. When jacks press inward on these plates, they can squeeze the opening down to ¾ in. The resulting air velocity approaches 3,000 m.p.h.—an all-time high for any large, continuous-operation wind tunnel. The jacks can be adjusted for any lower speed desired.

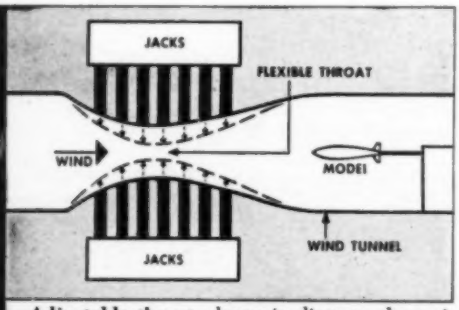

Adjustable throat, shown in diagram above, is controlled by two sets of jacks that press inward on flexible metal sections in top and bottom of tunnel, varying throat opening. Intricate cam system, at left, operates jacks, regulates throat to within .001 in. of desired size.

Your Next Tire May Be a "Lucky Wonder"?

Is this the "jackpot" tire with the better-than-natural rubber? Since they are being sold unmarked, getting one will depend on your luck—until makers can meet the demand for more.

Three out of a hundred 1948 buyers will get a masked marvel with invisible extra mileage built in.

By Charles Stevenson and Alden P. Armagnac

IF Lady Luck is smiling your way, the next time you buy a tire for your car, you'll get more than you expected for your money. This year, something like three out of 100 purchasers are going to receive a surprise-package tire, and the next one may be you.

This mystery tire will be of a standard make and will bear no distinguishing label. Its black rubber looks exactly like that of any other synthetic-rubber tire in the shop. Neither you nor the dealer can tell it from the rest—not even an expert could. So, if you walk out with the jackpot tire, you won't even know it until some day—perhaps in 1950 or 1951—you realize it has worn longer than any tire you have ever owned. Its invisible extra mileage is the maker's gift to the lucky buyer.

Just reaching the market, the wonder tires are the first to employ a brand-new kind of synthetic rubber, called "cold rubber" because it is made in refrigerated kettles. In at least one application—the treads of passenger-car tires, where it is being used at present—the new rubber surpasses nature's best.

Laboratory tests and high-speed road trials indicate that the new tires should give up to 30 percent more mileage than tires of the finest natural rubber. Some of the new type have run 40,000 miles on test cars without even wearing smooth. There seems no doubt that they are the finest tires the world has ever known.

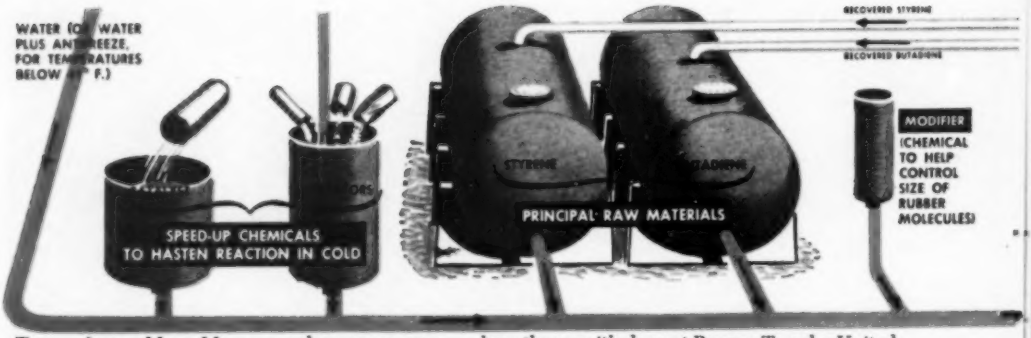

To make cold rubber, novel process uses speed-up chemicals and refrigerated kettles. Simplified pictorial diagram, continued on next three pages, and accompanying photographs show the way it's done at Borger, Tex., by United States Rubber Company. Samples drawn off from kettle (photo inset) tell when the rubber-making reaction has reached the desired stage.

The special synthetic rubber that goes into these tires is not expensive. About four cents a pound cheaper than natural rubber, it sells at the same price as ordinary synthetic rubber, 18½ cents a pound.

Large-scale manufacture of cold rubber, which climaxes years of effort to surpass nature's kind, started only a few months ago. The Copolymer Corporation began making it last February at Baton Rouge, La., and the United States Rubber Company last April at Borger, Tex., in synthetic-rubber plants that they operate for the Government. These two plants produce the entire current supply, now approaching 3,000,000 pounds monthly. Meeting only a fraction of the demand so far, the output will rise as other synthetic-rubber plants convert to the new process. By the end of this year the Goodyear Tire and Rubber Company will be making cold rubber at Los Angeles, Calif., and the United States Rubber Company will have a second plant in operation, at Naugatuck, Conn.

Sugar now goes into rubber. Above, a worker makes up a solution of dextrose sugar, one of the four speed-up chemicals in the newly discovered recipe that makes cold rubber feasible.

Factories are making tires out of the new rubber as fast as shipments are received. The United States Rubber Company's cold rubber from Borger goes to its main tire plant at Detroit, Mich. Copolymer's cold rubber from Baton Rouge, shipped to factories dotting the map from Connecticut to Colorado, supplies a group of eight participating tire companies, in which Sears Roebuck has the largest interest.

Put yourself in a tire maker's place and you can see why cold-rubber tires aren't yet being advertised. There simply aren't enough, so far, to go around. And talking about them would just make it harder to sell the regular kind that most buyers must be content to get for awhile. Next year, with more cold rubber available, production of the tires containing it will soar. At some future time, if they fulfill all expectations, they will probably become standard.

Cold-rubber tires sold to motorists meanwhile will provide a final mass test of the new material. As one tire maker explains, nothing but actual use by the public can reveal the frequency with which an occasional tire—perhaps less than one out of 100—will prove defective after long service. Makers learn of these rare cases when a purchaser brings back a tire to the dealer with a complaint. By the serial number that the tire bears, the maker will be able to distinguish the new kind from the regular

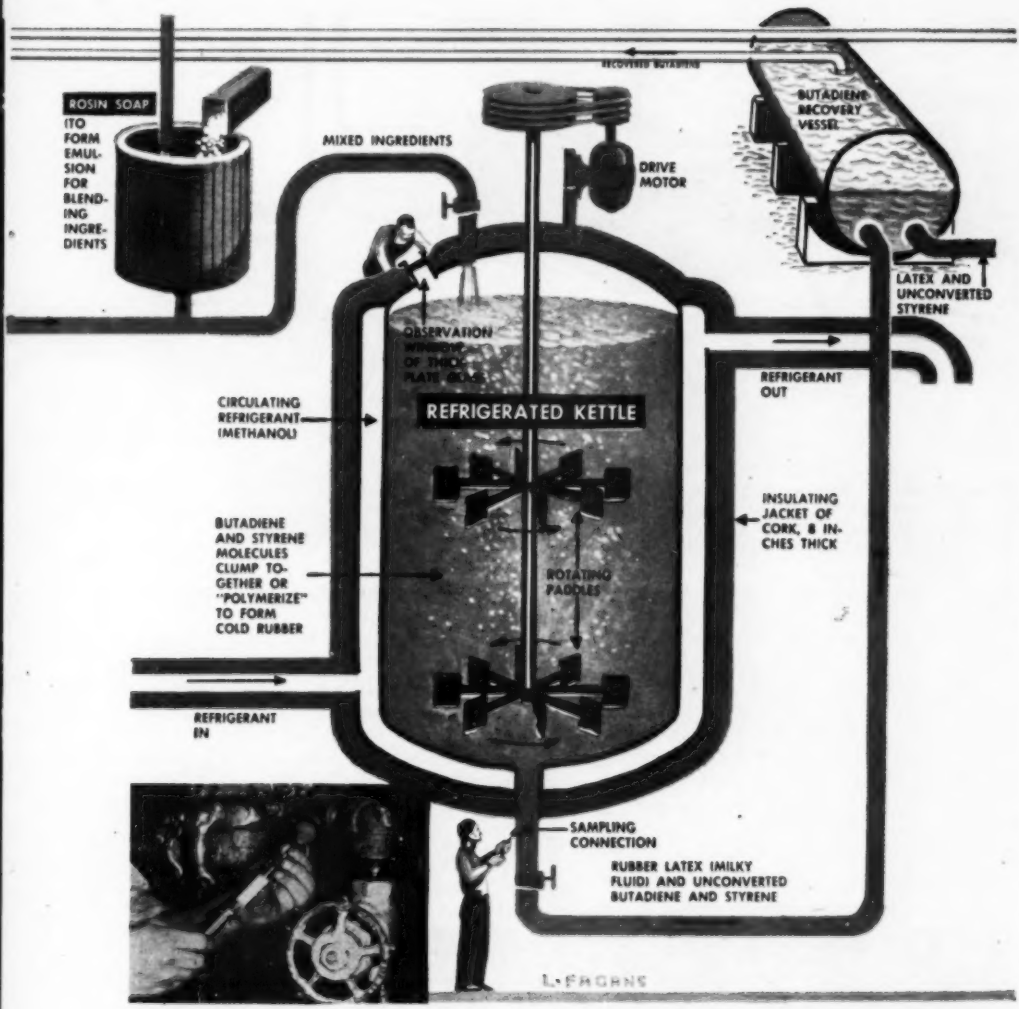

type. And if users complain of fewer defective tires among the new type than the old, in proportion to the number sold, this will provide the final proof of the new kind's superiority on all counts.

Tires currently being made of the new rubber are of composite construction. The tread is of cold rubber, and the rest of other types. Experiments in adapting cold rubber to tire carcasses are under way.

Even if tire makers can employ the new rubber only in treads, a vast market awaits it—for tire-tread rubber amounts to about a third of the nation's entire rubber consumption. The price of natural rubber will have little to do with this outlook. The tread of the average tire weighs 4½ pounds. If plantation rubber dropped to ten cents and cold rubber held at 18½ cents a pound, the synthetic tread would cost only 38¾ cents more than the natural—not much to pay for an extra 10,000 miles.

And when the supply of cold rubber becomes plentiful enough, much wider applications are foreseen. It may well prove a superior material for rubber soles, rubber heels, insulation for electric wire, and foam-rubber mattresses and upholstery cushions.

Not only motorists and other immediate users, but every American citizen, will

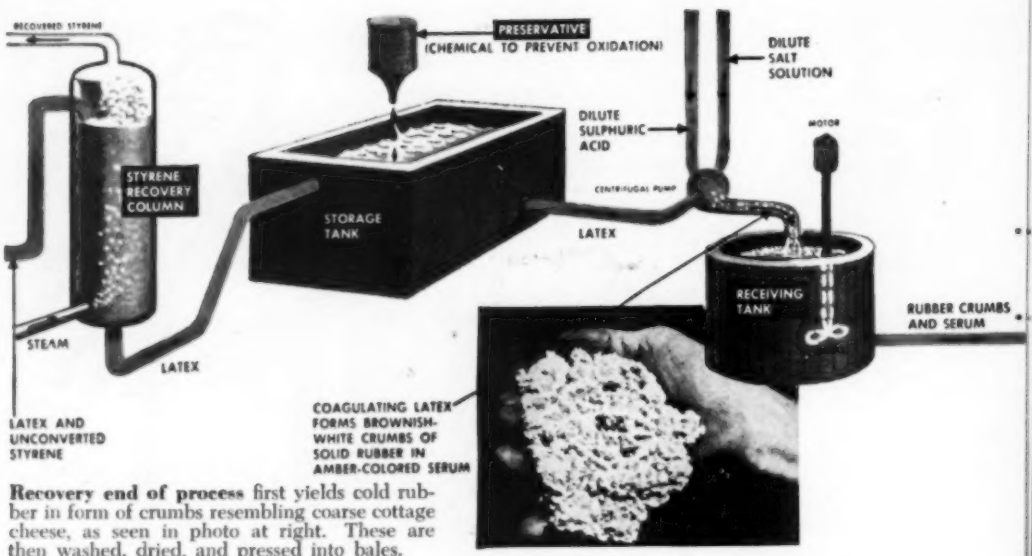

Recovery end of process first yields cold rubber in form of crumbs resembling coarse cottage cheese, as seen in photo at right. These are then washed, dried, and pressed into bales.

benefit from a material superior to natural rubber and in such universal demand. For it will breathe new life into the synthetic-rubber industry, vital to national defense.

When World War II cut us off from Far East rubber, we had to build from scratch the gigantic $700,000,000 synthetic-rubber production line that kept our trucks rolling, our planes flying, and our guns in action. War's end faced it with the prospect of becoming an ugly duckling. To keep this great industry geared up to meet a possible future emergency, it has had to have Government support—including legislation requiring makers of rubber goods to use a specified percentage of synthetic rubber—and has been at the mercy of prevailing opinion on Capitol Hill.

At one stroke, cold rubber now lifts this strategic industry out of the realm of politics and transforms it into an independent and booming commercial enterprise. Now it can stand on its own feet, assured of a permanent future in its own right. Another fleet of battleships could hardly be a greater asset to our national security.

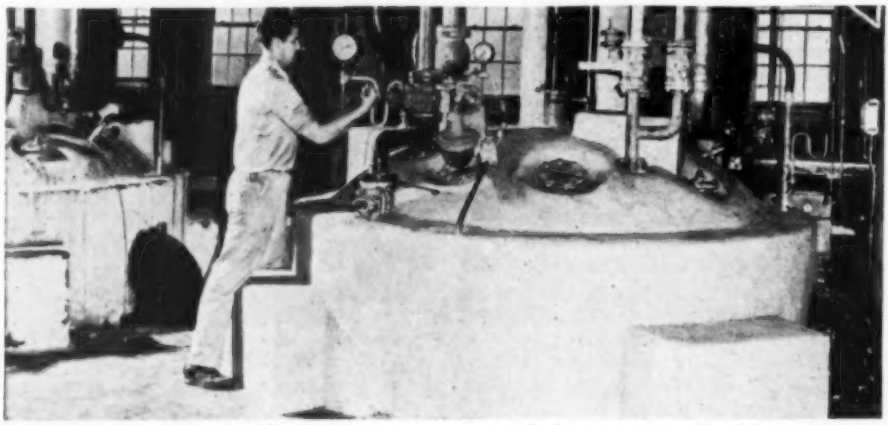

Three refrigerated kettles like this one, something **new in rubber making, produce** the phenomenally long-wearing cold rubber in the Borger plant at temperatures from 41° down to 0° F.

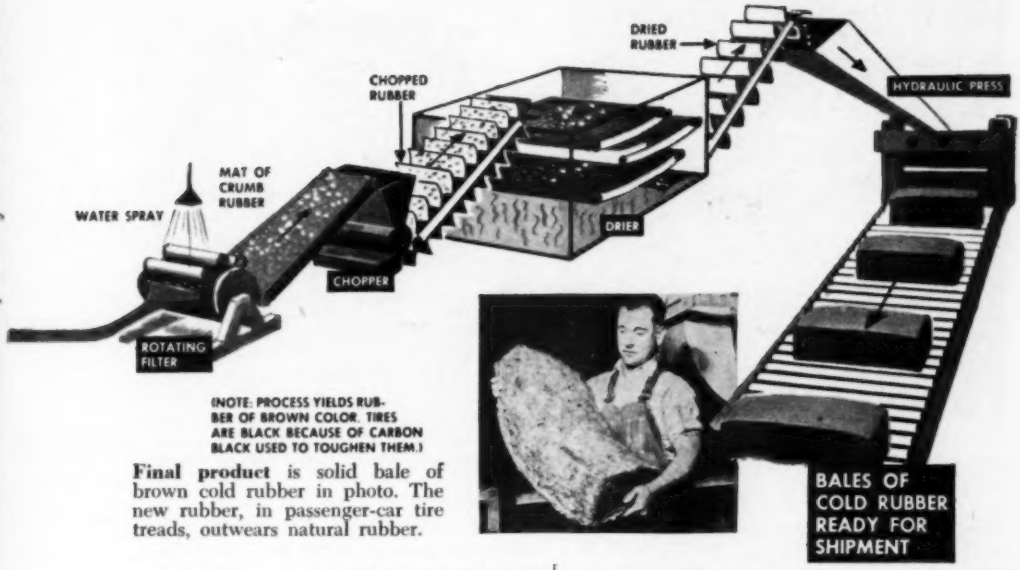

(NOTE: PROCESS YIELDS RUBBER OF BROWN COLOR. TIRES ARE BLACK BECAUSE OF CARBON BLACK USED TO TOUGHEN THEM.)

Final product is solid bale of brown cold rubber in photo. The new rubber, in passenger-car tire treads, outwears natural rubber.

Like the synthetic rubber of World War II, cold rubber results from the teamwork of all the leaders of the industry—pooling information and working closely together.

Best all-around wartime synthetic rubber, and the immediate ancestor of the new low-temperature kind, was GR-S—short for "Government rubber, styrene type." It used the same two principal raw materials, butadiene and styrene, that cold rubber does. Butadiene is a gas, derived from petroleum or alcohol, which can be compressed to form a volatile water-white liquid. Styrene is a colorless liquid obtained from coal or natural gas. When these ingredients and supplementary chemicals are churned together in a kettle, under pressure and at a constant temperature, a reaction called polymerization takes place. Little molecules clump together to make big ones—and the product is synthetic rubber.

Working desperately against time, wartime researchers found they could make this reaction go fast enough to suit them at 122° Fahrenheit. (This was the equivalent of a round figure of 50° on their laboratory-type Centigrade thermometers.) The GR-S that resulted was good enough to meet the emergency. Without further ado, they standardized on that method and succeeded in turning out more than a million long tons of rubber a year. All the rubber trees in the world produced only a little over a million and a half tons in their best year.

GR-S gives about 70 percent of the mileage of the best natural rubber, in passenger-car tire treads. Better synthetic rubber would result, experts have known, if they ran the rubber-making kettles at a considerably lower temperature than 122° F.—say, 41° F. (equivalent to 5° Centigrade). But this was out for wartime purposes, because it was found to slow down the reaction time from 12 hours to several days; and the same drawback appeared to make the low-temperature process uneconomical for peacetime use. A given number of kettles would turn out only a fraction as much 41° GR-S as 122° GR-S.

Key to large-scale production of low-temperature rubber is a recently discovered recipe using four speed-up chemicals, which make the reaction take place many times faster in the cold. They are cumene hydroperoxide, dextrose sugar, sodium pyrophosphate, and ferrous sulphate. Successfully tried out for rubber making by University of Minnesota experimenters in 1946, cumene hydroperoxide is a new chemical product, made at Brunswick, Georgia, by the Hercules Powder Company and supplied in 55-gallon steel drums as a pale yellow to colorless liquid. It acts as a catalyst for the synthetic-rubber reaction—replacing potassium persulphate, the agent formerly used for GR-S. The other three chemicals are activators that abet the action of the new catalyst. When these

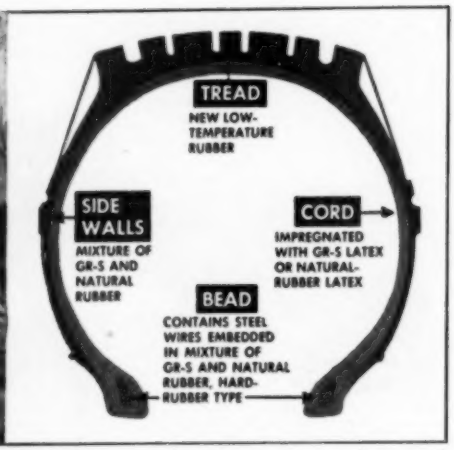

Here is the wonder tire. Actual photo of one, under test, shows wheel that simulates bumpy road. Diagram illustrates composite design of the new tire, which uses cold rubber for tread.

speed-up chemicals are added to a kettleful of raw materials, rubber can be made in 12 hours at 41° F., just as quickly as by the old process at 122° F. It shows all the superior characteristics typical of low-temperature rubber—better resistance to wear and cracking, higher tensile strength—which, chemists say, are due to a more desirable size and composition of the molecules.

Equipment never seen before in the rubber industry applies the 41° F. process at the Borger and Baton Rouge plants. Banks of cork-jacketed kettles, cooled with circulating refrigerant from frost-coated pipes, chill their contents to the temperature of a snappy March morning. Within, butadiene and styrene look at first like droplets of oil in salad dressing as they and supplementary chemicals are blended in an emulsion, with the aid of soapy water. As their molecules fuse into larger ones, they form a milky fluid or latex, like that which oozes from the rubber tree. Samples drawn off at intervals show how the reaction is progressing and indicate the right moment at which to drain off the latex, into tanks where it is coagulated into brownish-white rubber crumbs resembling coarse cottage cheese. These are washed, dried, and pressed into bales of solid brown rubber. The entire operation is automatic.

If this low-temperature rubber were toughened with ordinary carbon black, a form of lampblack widely used for the purpose, it would wear half again as long as GR-S and its quality would just about equal that of natural rubber. The additional improvement that gives the new synthetic its marked superiority over natural rubber comes from an improved type of carbon black, developed in research pioneered by the Phillips Petroleum Corporation. Called "furnace black," this new ingredient benefits other synthetic rubber too, but with low-temperature rubber its effect is particularly favorable. The happy combination of cold rubber and improved carbon black produces the finest synthetic rubber ever made.

And chemists may do better yet—for, as they point out, the quality of rubber from trees is fixed by nature, while that of synthetic rubber is limited only by man's ingenuity. Investigating the most promising possibility, the United States Rubber Company has just begun large-scale production of cold rubber at 14° F. and 0° F., as well as at 41° F., in its Borger plant. Antifreeze, substituted for part of the water in the reaction kettles, keeps the contents from freezing solid at these extremely low temperatures and is later recovered. Preliminary experiments at a cold-rubber pilot plant of the Phillips concern have yielded a progressively tougher rubber, at a few cents more per pound, as the temperature is dropped to 14°. And Phillips' assistant chief of research, W. A. Schulze, predicts that 75,000-mile tires can be made in the near future. Whether these materialize will depend upon motorists' willingness to pay for premium quality. END

"Train" Rides Road

You have to look twice at the giant Foster trailer truck above to make sure it's not a freight train. It's 60 feet long and can haul a 50-ton load—more than the average railroad box car. For easy loading, the rear of the trailer tilts down, forming a ramp (right). As the load mounts the ramp, the bed presses down on the rear wheels, providing added brake friction and permitting loading on a slight grade. Truck and trailer can be drawn up flush so loads can roll directly from the trailer bed onto the truck bed.

Wheel Does Many Jobs

Just hook this single-wheeled, handle-bar Pow-r-Wheel ⓣ onto the dump barrow at left above, and you have a power barrow. Detach the barrow body from its two-wheeled chassis, put on the flat body at right above, and you now have a flat-bed truck for hauling cans or crates. The single-cylinder, 1½-hp. driving wheel provides speeds up to 3¼ m.p.h., can push a full 600-lb. load up a 30-percent grade and turn in a 27-in. radius. A 2½-hp. model handles 400 lb. more. Made by the C. G. Schulze Co., of Los Angeles, the machines can also be used with sweeper and mower attachments.

The Boeing Stratocruiser Ⓣ cousin to the famed atom-bombing B-29 and its new big brother, the B-50, is scheduled to begin commercial air-line service next year. The big plane —110 ft. 4 in. long, its wings spreading 141 ft. 3 in. tip to tip—can carry up to 114 passengers.

Vertical tail surface, towering as high as a three-story building, can be folded down to one side (as shown below) to let the Stratocruiser into a hangar. Men walking upright under an outboard engine nacelle give another suggestion of the new sky queen's great size.

Figure 8 contour of the fuselage, when viewed head on, shows the Stratocruiser's ancestry. Its upper deck has been added, in effect, to the circular fuselage of the B-29. Boeing's Stratofreighter Ⓣ, the cargo-carrying C-97, has much the same cross-section as the new air liner.

Your First Trip In a Stratocruiser

Your pilot on the two-decker will be a veteran, but there'll be many surprises for you as a passenger.

By George H. Waltz, Jr.

IT had been quite a flight. All that remained was for us to grope our way down through thick weather to an instrument landing at New York's LaGuardia Field. Rough air had messed up our first approach, and we had gone around for another try.

"Landing gear down," called the pilot.

"Landing gear down and locked," came the co-pilot's response.

"Full flaps," ordered the pilot.

"Full flaps," echoed the co-pilot, after checking the flap-position indicator on the instrument panel.

The pilot eased back the throttles, and the roar of the engines settled to a whistling purr. Suddenly I heard the welcome screech of the plane's tires on the runway.

The pilot, co-pilot, and flight engineer at their controls had literally sweated that one out. Their white shirts were spotted with perspiration.

So was mine. This had been my first experience as an observer in the instrument-filled cockpit of a Boeing Stratocruiser®—aviation's newest and biggest passenger plane, which soon will be plying the air routes of six major air lines. We had flown for more than an hour, and just about every-

Four 3,500-hp. engines power the luxury air liner. In landing, blades of all four propellers can be reversed in pitch to serve as brakes and shorten the plane's run after its wheels touch. With blades of its props thus reversed, Stratocruiser can even back itself into a hangar.

Stratocruiser cockpit houses some 600 controls and indicators. Seated here are pilot (left), co-pilot (right), flight engineer (foreground). Plane also carries navigator, radio operator.

Flight simulator for training Stratocruiser crews is duplicate of PAA's cockpit. Instructor at "trouble box" in foreground creates flying problems and checks the trainees' responses.

thing had happened: bad weather, ice on the wings, an engine failure, radio troubles. *And we had completed the flight successfully without ever leaving the ground.*

We had been "flying" the amazing new electronic flight simulator built by Curtiss-Wright. It is used by Pan American Airways to train the crews who will fly a PAA fleet of 20 Stratocruisers.

The flight simulator, which cost $250,000, is an exact duplicate of the Stratocruiser's cockpit. Thanks to an ingenious electronic brain, its instruments and flight controls function just as they do in the actual airplane. Seated in the simulator, a pilot can go through any maneuver he normally would execute in the air—plus a good many he wouldn't dare to try if actually flying the $1,500,000 aircraft.

Trouble Made to Order

By twirling dials and flipping switches, a flight instructor, hidden from the pilot and his crew, can make the simulator duplicate just about any kind of flying problem. Then it is up to the flight crew to correct or meet the trouble and complete the flight. Even engine noises and landing sounds are faithfully reproduced. In fact, no greater tribute could be paid to the simulator's realism than the spots of perspiration on the shirts of old-time pilots when they emerge after a "flight" —even though the earth-bound cockpit is air-conditioned.

After my first "flight" in the simulator, I found out more about the Stratocruiser from PAA and Boeing pilots and engineers. I was particularly interested in the new plane because, during the war, I had spent quite a bit of time in the B-29. In fact, I wrote the AAF's pilot-training manual for it. And I knew that Boeing's latest sky queen was a development of that atom-bomb carrier.

When an airplane just naturally wants to do what the pilot would have it do, flyers call it a "pilot's airplane." The Stratocruiser, I learned, is not only very much a pilot's airplane, but a passenger's airplane and a maintenance man's airplane as well.

Let's climb aboard a Stratocruiser for a transoceanic flight. Inside its main passenger cabin, 74 feet long, you take a softly cushioned seat that is the result of more than 100,000 man-hours of research and design. It automatically fits itself to the contours of your body whether you are long or short, fat or lean.

Unlike most flights that you have taken before, this will be no "sit-down" trip. The Stratocruiser is a double-decked airplane. If you get tired of sitting, a centrally located spiral staircase will lead you below to a spacious lounge much like the club car on the fanciest transcontinental train.

In flight, you will breathe air that has been filtered, deodorized, and warmed or cooled according to the need. Up to 15,000 ft., the air pressure in the cabin will be no less than it was at sea level. Even at 25,000 ft., the altitude at which we will make most of our trip, the cabin pressure will never fall below that ordinarily found at 5,500 ft. Your ears won't pop or your nose plug up.

Now that the last passenger is aboard and they are taxiing our ship out for take-off, let's go up front and have a look at the cockpit and flight deck. A glance at the fuel gauges at the flight engineer's position, just behind

Main cabin, on the upper deck of a PAA Stratocruiser, will accommodate 61 passengers. Pumps keep interior air at low-altitude pressure even when the plane is flying five miles high.

For night flights 36 of the seats make up as nine double berths. With 25 passengers sitting up in the other seats, main cabin thus will carry 43 on overnight and transoceanic hops.

Even stewardess has a control panel. From desk at rear of main cabin she regulates lights and air conditioning, answers passenger calls, and talks by phone with other members of the crew.

Lounge on lower level seats 14 passengers on short trips, or serves as "club car" on long flights. At one end is a serving bar. Plane also has men's and women's dressing rooms.

Meals, precooked and frozen, are reheated by electricity in galley behind passenger cabin on upper deck. Individual serving trays are passed to stewardess through louvers in door.

Trays fit snugly into rimmed tables that hook to seats at mealtime. Rubber mountings prevent vibration of seats in area of cabin affected by pulsating air blasts from propeller tips.

For handy servicing, leading edge of wing between fuselage and engines lifts open on hinges to let mechanic get at heater ducts, oil lines, carbon-dioxide pipes, and electrical wiring.

Built-in stairs permit loading of Stratocruiser without ramps. This one leads to forward cargo compartment. Another in door of aft cargo hold admits passengers through lower-deck lounge.

the pilot and co-pilot, tells us that our Stratocruiser is loaded with 7,630 gallons of fuel. This accounts for about 22½ tons of the big plane's total maximum take-off weight of 70 tons. The oil gauges show a total of 200 gallons of oil.

Now everything is ready for the take-off. As the pilot "walks" his four throttle levers forward, the Stratocruiser's four Wasp Major ⑦ engines build up to their combined full 14,000 hp.—twice the power of any existing locomotive. The air-speed indicators in front of the pilot and co-pilot show our speed mounting as we roll down the runway. In a matter of seconds we are airborne. The pilot, busy with his flight controls, then calls for "gear up," "flaps up," and finally "normal climbing power." At this last order, the flight engineer adjusts his duplicate throttles and the other engine controls that spread out before him like an organ console, until the engines are delivering the best power for climb.

Cruises Nearly 5 Miles Up

Forty-five minutes later your Stratocruiser has just reached its cruising altitude and the pilots are trimming it for level flight. In that 45 minutes of climb, the Stratocruiser's four engines have used up 700 gallons of fuel to lift you up just about four and three-quarter miles and carry you 182 miles from your starting point. At the moment, the pilot, co-pilot, and flight engineer are adjusting the engine controls to get the most out of their fuel for long-range cruising. For each hour of operation now, your Stratocruiser's engines will use up about 530 gallons of fuel to push you through the air at better than 300 m.p.h.

There is little chance that you will hit any weather during most of your trip. At 25,000 feet you are above the effects of most storms. Besides, your navigator has plotted the plane's course around the weather map's "highs" and "lows" to take advantage of all prevailing tail winds to save fuel (PS, July '46, p. 93).

If an engine develops trouble during your flight, you probably will never know it. The Stratocruiser flies just about as well on three engines as it does on four. As a matter of fact, so good is the Stratocruiser's natural stability, even at full load, that an engine could have failed on take-off without your feeling it.

By this time in your transoceanic flight you have probably noticed that, regardless of the changing outside temperature, the window beside your seat has neither frosted over nor steamed up. It can't. The Stratocruiser's windows are fitted with double panes, and cabin air is forced between the panes to keep them at cabin temperature.

Up in the cockpit, your flight crew likewise is having no visibility problems. Their operating deck is also air-conditioned and pressurized, and special electricity-conducting glass keeps the cockpit windows clear of ice and fog. Should you run into heavy icing conditions, your Stratocruiser's propellers and the leading edges of its wings are heated internally to prevent ice from forming or building up.

Now, after about 10 hours in the air, the pilots are beginning their letdown for a landing at your destination. The Stratocruiser is about 17 tons lighter than it was when you took off: it took that much gasoline to get you where you are.

As the big plane soars over the trees near the end of the runway, you are some 50 feet above the ground. About 1,300 feet farther the wheels touch the ground, and in another 1,800 feet the plane rolls to a stop. This amazingly short landing roll results from the Stratocruiser's use of reversible-pitch propellers whose reverse thrust can be used to aid the brakes. In this particular landing, the pilot had reversed the blades on only two of the plane's propellers. If he had reversed all four, he could have braked his ship to a stop within 1,230 feet after its wheels touched the runway.

By the time you leave your Stratocruiser, maintenance crews will be working over her. Forty-four points of easy access to vital parts have been built into the Stratocruiser to simplify maintenance. By lifting up the hinged leading edge of a wing, a mechanic can get at oil lines, heater and air-conditioning ducts, electric wiring, and other equipment. By lowering the wing flaps he can work, unobstructed, on fuel and oil lines, hydraulic lines, fuel valves, and electric cables. Broad removable manholes under the wings make it easy to get at fuel pumps and fuel cells.

When the Stratocruisers take to the air commercially early next year they will hop from coast to coast in eight hours, make the trip from New York to London in 11½ hours, fly from Seattle to Tokyo in 15 hours, or go three-quarters of the way around the world from Shanghai to London in 38 hours. Their passengers will make those long, fast flights in amazing comfort. For the Stratocruiser is truly the first of the long-talked-about postwar luxury air liners. END

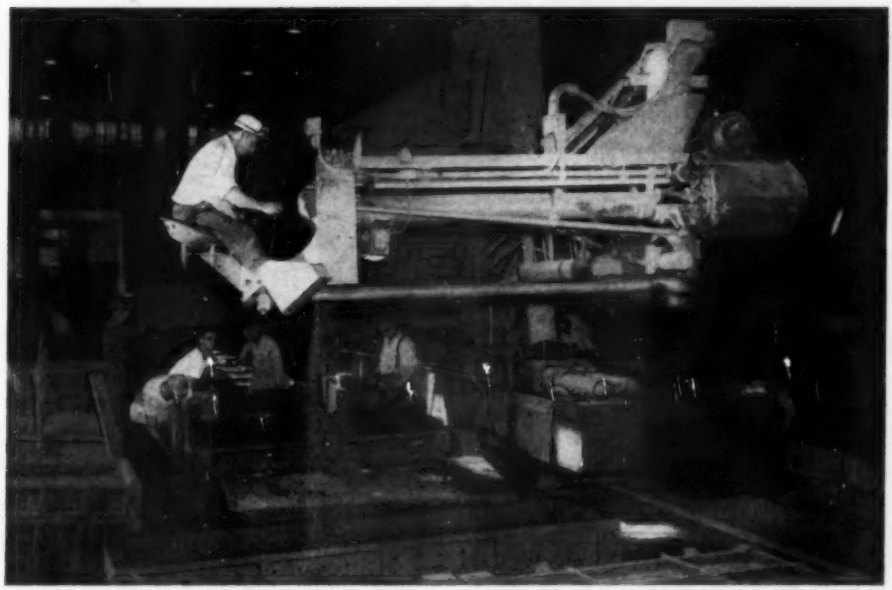

Sand Slinger Fills Molds

THIS mechanical ram speeds the packing of sand molds for steel castings. Cups on the rim of a wheel whirling at 1,800 r.p.m. scoop a ton of sand a minute from a conveyer and hurl it down into the molds. This spray packs them harder than can be done by hand or pneumatic ram. The machine is an improved model used by U. S. Steel.

MECHANICS OF LIVING

How an Electric Shaver Works

Razor works best when held at a right angle to skin, as demonstrated above. Shaver, a Remington Blue Streak Five ⓕ (right), weighs 12 ounces with cord. Head is 1 9/32 in. long, 1¼ in. wide. Entire shaver is 4½ in. long, 2 1/16 in. wide, 1 5/16 in. thick.

PS photos by W. W. Morris

THE humming electric shaver, second only to automobiles as a cause for argument among men, is nothing much more than a refined barber-shop hair clipper: a series of fixed slots to plow up the hair, a series of saw-edged blades to snip it off.

The size and shape of these two basic elements and how they work together differ widely in the scores of shavers that have been on the market at one time or another. The slotted head can be round or flat. The cutting blades can have a semirolling or transverse action. They may cut going both ways or only in one direction. The shaver may have one cutter or as many as five. It may have a brush or impulse motor.

In some early electric shavers the cutters were attached to flexible steel shafts vibrated by buzzerlike arrangements of electromagnets. Most current models have a rotary motor with an eccentric collar on its shaft to move a center-pivoted lever that wiggles the cutter.

The shaver pictured on these pages is claimed to lead the field in sales by its maker, Remington-Rand, Inc.

Remington insists that the man who doesn't like electric shavers just doesn't know how to use them. Here's its recipe: (1) dry face thoroughly; (2) hold shaver at right angle to skin; (3) move it *back and forth* across the beard in light, quick strokes of about two inches; (4) in spots where hair swirls in all directions, use a circular motion.

Doing it right, Remington says, a beginner can shave in five minutes, and practice can cut that time almost in half.

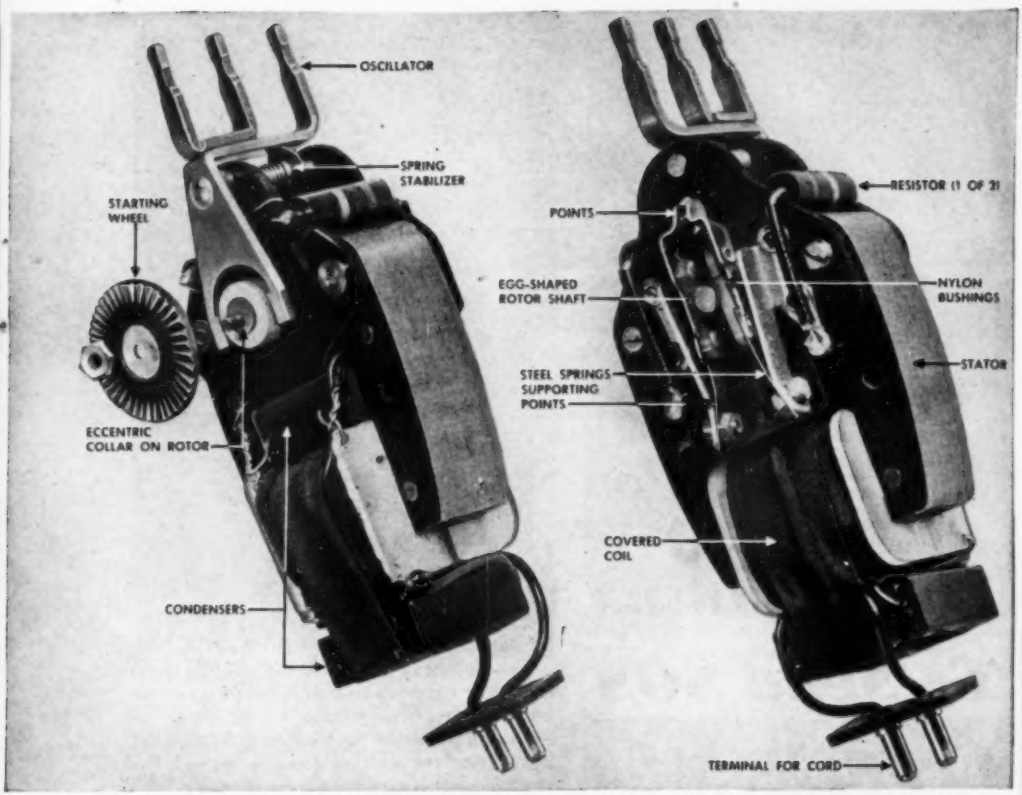

Tiny motor, shown from both sides in photos above and at right, makes 8,500 revolutions a minute. Rim of starting wheel sticks through a slot in shaver's case (as shown on opposite page) so it can be twirled with thumb to get motor off dead center. Under it is eccentric collar on rotor shaft to push oscillator fork once in each direction with each turn of motor. Three oscillator prongs, in turn, vibrate cutters. Egg-shaped collar on other end of shaft pushes contact points apart once with each turn to make-and-break circuit and keep the motor going.

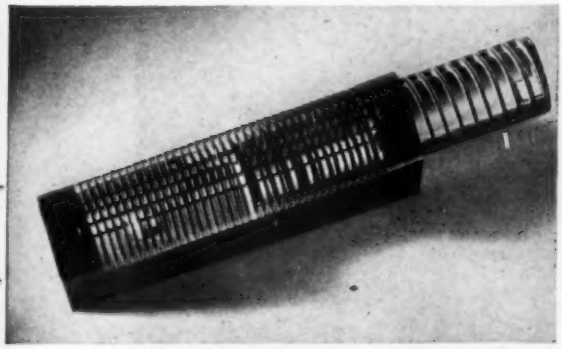

Cutter has 185 slots in 37 rows for hair to go through, 19 double-edged knives that move across them 17,000 times a minute. Here the knives have been slid out far beyond their normal sweep to show how they're shaped to fit closely against the slotted outer shell.

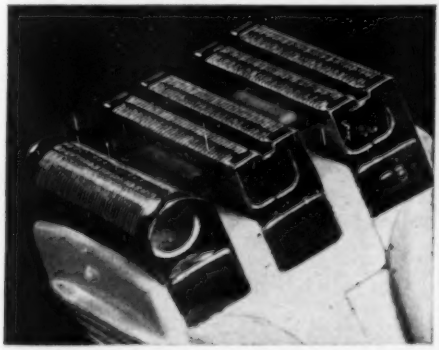

Multiple shaver has one rounded cutter (like the one shown close up in photo at left), for close shaving as skin folds around it, and two pairs of flat cutters for long hairs. Their outer shells, **about .0025** in. thick, are partly supported by the heavier knives just under them.

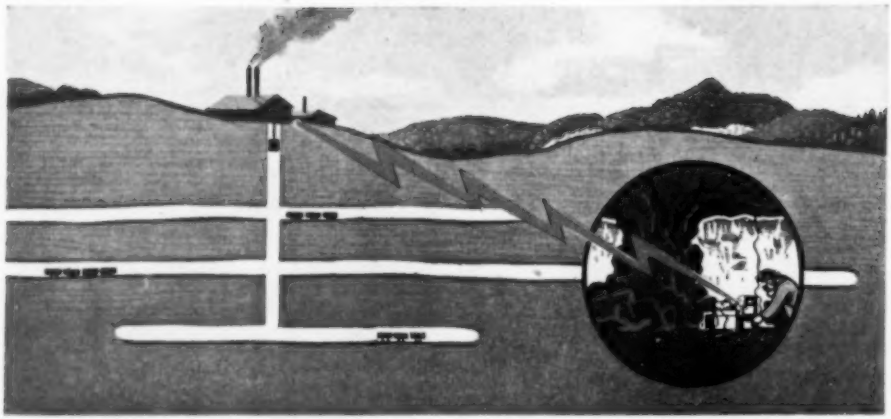

Trapped behind cave-in, miner can quickly radio exact location to surface station, report underground conditions, and help direct rescue work. Communication between points inside the mine and between hoisting cages and operator at top of entrance shaft is also possible.

Mine Radios To Send SOS From Depths

RADIO has come to the rescue of miners who face death when trapped by explosion or cave-in far underground. With a new portable battery set they can radio for help within seconds after disaster strikes.

Developed by the U. S. Bureau of Mines, the new two-way communications system uses low-frequency radio waves to penetrate hundreds of feet underground. Besides being transmitted directly through the earth, signals can be sent over power lines or inductively over wires, pipes or rails.

Surface radio both sends and receives, is powered by 110-volt AC. One terminal is connected to rails, the other to metal stake driven into ground. It transmits on two fixed frequencies.

Underground set, also two-way, needs only 6-volt storage battery with vibrator pack for AC conversion. One terminal wire is staked into roof of tunnel; other is connected to rails.

Charging current for a motorcycle battery must not exceed 2 amp. Never connect it directly on an auto-battery charging line. The inset is a cut-away of a Harley-Davidson battery.

Check the specific gravity each week. At the same time add distilled water if needed. To insure uniform coverage of the plates, make certain the motorcycle is perfectly upright.

More Juice for Your Motorcycle

YOU can't expect to abuse a motorcycle battery and get away with it. In general, you should treat it like an automobile battery. But in some respects it's a special case, requiring extra care.

Make a habit of checking the specific gravity of each cell once a week. If the hydrometer reads 1.150 or less, recharge the battery promptly. With the hydrometer, also add distilled water as necessary to raise the level about 5/16" above the plates. It's best to do this just before using the machine. Avoid too much water.

Don't hook up a motorcycle battery directly on an auto-battery charging line. The current is excessive. Two amperes is tops for a motorcycle battery. If automobile charging equipment is used, bleed off a lower charging current. This can be done by connecting the battery in parallel with one of the car batteries on charge. Be careful not to charge beyond 1.275 specific gravity.

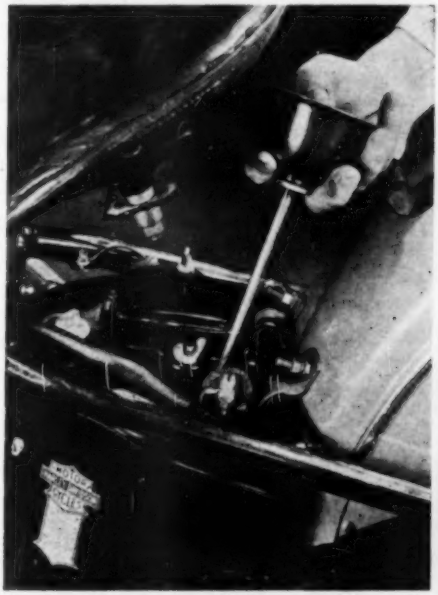

Apply a drop or two of oil occasionally to the felt washers on the terminals. This forms a protective film on the terminals, preventing corrosion and permitting better lug contact.

Hints From the Model Garage

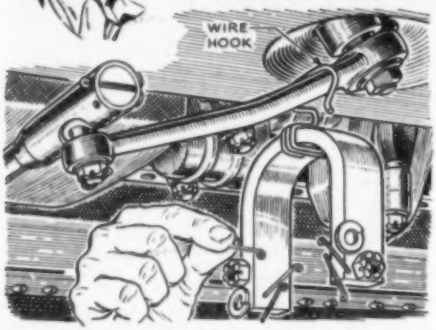

Magnet Holds Small Parts. When you're working under a car, hook a permanent magnet nearby. As you remove nuts, cotter keys, pins, or small parts, just stick them to the magnet. P. R. Wilson, of Brooklin, Ont., says this is a help when you replace the parts. They're right there when you want them, and they don't pick up grit.

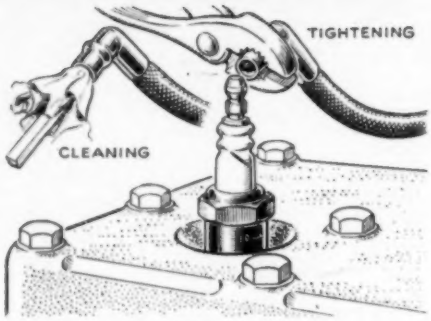

Dirty Cap Causes Miss. On high-compression engines, mysterious low-speed missing or bucking may sometimes be traced to poor electrical contacts in the high-tension leads. According to Frank Tobin, of Manhattan, N. Y., cleaning out and tightening the plug caps will often cure skips seemingly caused by defective plugs.

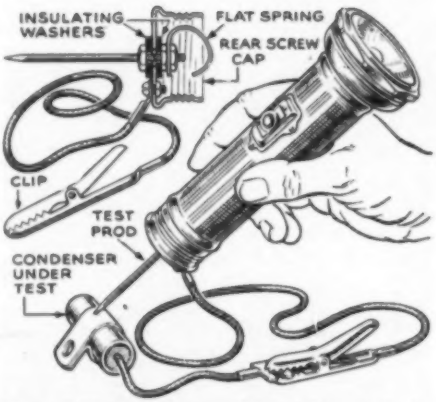

Flashlight Tests Circuits. A flashlight with a metal case makes a good continuity tester. Rufus P. Turner, of New Bedford, Mass., rigged this one. The test prod is a 3" brass rod threaded for 6-32 nuts and insulated from the cap by fiber washers. The other lead runs directly to the cap. In use, the bulb lights to indicate grounds and shorts. No light shows on an open circuit or an unshorted condenser.

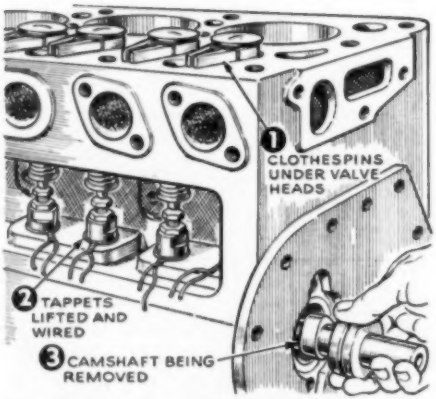

Clothespins Wedge Valves. Here's a time-saver in removing the camshaft of an L-head engine: Instead of removing the valves, springs, and tappets, just raise each valve spring with a valve-spring lifter and wedge a clothespin or piece of wood under the valve head. Then lift and wire each tappet up out of the way. The thrustplate then can be removed and the shaft pulled out. Kaiser-Frazer Corp. suggests this.

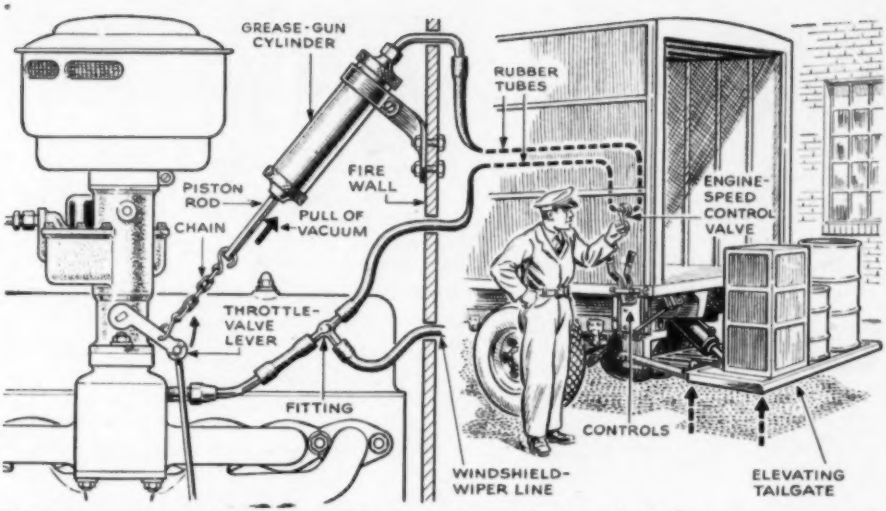

Vacuum Runs Remote Throttle. Powered by a take-off from the engine, an elevating tailgate takes a lot of labor out of truck loading. Mike Walt, of La Porte, Ind., says he had trouble with flexible-cable rigs varying engine speed from the back of the truck, so he built this vacuum-operated remote control. The cylinder is an 8″ grease gun and the lines are windshield-wiper hose. A two-way valve opens the throttle, or in second position bleeds air into the cylinder, letting the throttle-closing spring take over.

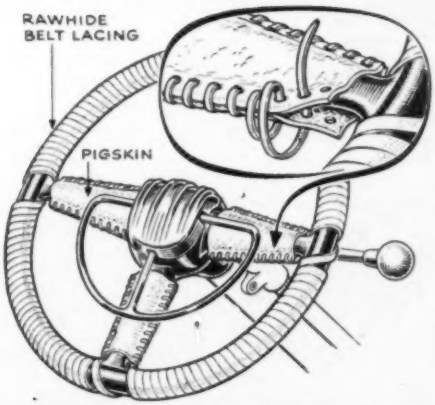

Glove for Steering Wheel. You can lend your car a custom-built touch by wrapping the rim of the steering wheel with rawhide thongs and lacing pigskin covers on the spokes. Leather not only has a good feel to begin with, but its texture generally improves with use. Cut the spoke covers as wide as the combined width and thickness of a spoke, and use a darker lacing on the edges.

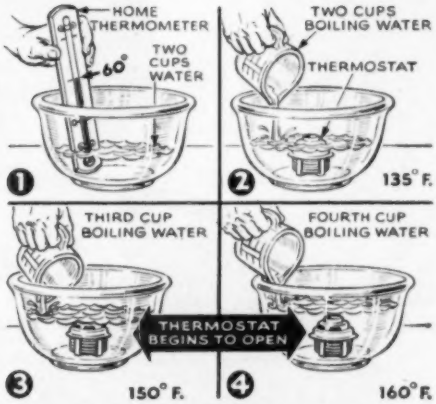

Checking Thermostats. If you don't have a high-temperature thermometer, you can test auto thermostats with an ordinary one, using a method suggested by Roy Howell, St. Albans, N. Y. Put 2 cups of water at 60 deg. in a bowl with the thermostat, and quickly add 3 cups of boiling water for about 150 deg., 4 cups for 160 deg., 5 for 168 deg., 6 for 174 deg., or 7 for 178 deg. Car manual gives opening point.

Gus Plugs for Cupid

The curtain of time seemed to be a little frayed the day Gus got mixed up in the romance of old cars and young people.

By Martin Bunn

A CHANCE remark of Joe Clark's had set Gus Wilson to thinking about old times in what he still calls "the auto game." Alone in the shop at four o'clock that day, he was still at it—his chair tilted comfortably, his feet on a parts box, and his gone-out pipe in his mouth. By that time memory had taken him back to the Orient—that long forgotten motor buckboard with a rear-mounted power plant. How many people

The antique Autocar sparkled under a shiny red coat of paint. Its plentiful brass trim gleamed in the wisps of afternoon sunlight.

are there still around, he wondered, who ever drove an Orient? How many . . .

His eyes closed, his chin dropped, and his pipe slipped from between his teeth to spill cold ashes down the front of his shirt.

The creak of the shop door made him jerk up his head. As his eyes snapped open his heels thudded down on the cement floor with a jar that should have wakened him. But he knew that he was dreaming, because there in his up-to-the-minute shop stood an antique Autocar looking sparkling and new under a shiny red coat of paint. Its plentiful brass trim gleamed in the wisps of afternoon sunlight that followed the car through the door. At the tiller—for it had no steering wheel—was a tall, thin man whose face was half masked by old-fashioned goggles and a big, black, handlebar mustache.

A short distance behind the prehistoric vehicle and its driver came another—but prettier—vision of the same forgotten era—a young lady in a fawn-colored riding coat with puffed-out sleeves and long skirts that flared from a slender waist.

Gus stared at the two and they stared back at him. Then the girl giggled and the man grinned. "You Gus Wilson?" he asked.

Gus nodded. He couldn't get his tongue working.

"My name's Oldfield. . . . Not Barney—J. Ransome Oldfield. I'm the fellow who owns the world's best collection of early-model automobiles."

Gus laughed. So he *was* awake! He had heard about Oldfield—a rich man who recently bought a big country place outside town. Oldfield was gaining more than a local reputation as a man who would spare no effort in tracking down early cars.

"I should have known you," Gus smiled cordially. "This one of your prizes?"

"Sure is," Oldfield said proudly. "Over forty years old and absolutely perfect. I'm driving it down to the antique car show in the Armory. All entries must arrive under their own power. Costumes count, too. That's why Mary here—she's my daughter—and I are wearing these rigs. They're as authentic as the car. Even my mustache—I

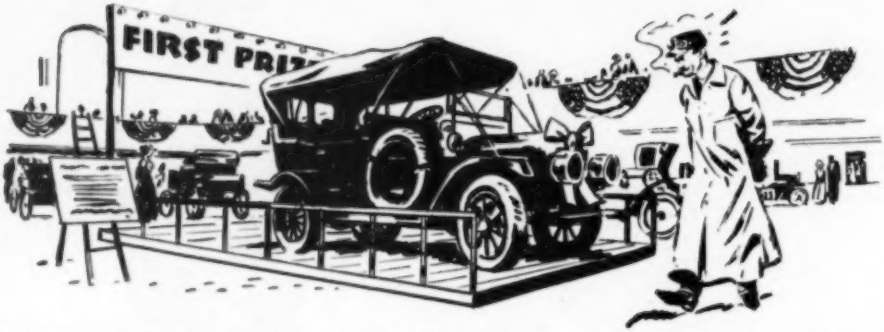

grew it specially for this show. Like it?"

Mary giggled again. "Supersonic!" she said. "Poor Tim Sheridan won't have a chance once the judges spot it!"

Oldfield glared at her. "That young squirt and his patched-up Stanley Steamer won't have a chance!"

Mary's blue eyes sparkled cold fire. "Tim's no squirt and you know it!" she snapped. "You're scared stiff he'll beat you out of that ugly old mug you're so set on winning."

Gus didn't say anything. Lanky Tim Sheridan is a favorite of his—he almost grew up in the Model Garage shop, and Gus was the first to realize that he had the makings of a mechanical genius. Tim's a top-drawer engineer now, but he still sees Gus often.

Oldfield left off scowling at his daughter and turned back to Gus. "We're having a little trouble," he said. "Brakes don't hold the way they should. They tell me you're a pretty good mechanic so I stopped by to ask you to take a look at them."

"Glad to," Gus assented. He started toward the old Autocar and looked it over almost with reverence.

The owner grinned delightedly. "She's a honey—every part original or made from the original shop drawings. Absolutely authentic. Wait a moment till I start her up."

It took more than a moment, but after Oldfield had twisted the crank a dozen times the motor took hold.

Gus nodded his appreciation. "Whatever's wrong with the old gal, it certainly isn't her engine."

Oldfield glared. "There's nothing—absolutely nothing—wrong with this car! She'll do her 30 miles an hour come hell or high water!"

"But," Gus reminded him, "you told me the brakes don't hold right."

"You got me wrong," the older man grinned. "It's my daughter's car, only a few months off the assembly line, that we're having trouble with."

Mary went out of the shop and soon eased an expensive roadster up the drive and brought it to a cautious stop behind the old Autocar. "These brakes," she complained, "are simply terrible. I've got to have them fixed today." She looked defiantly at her father. "I've got a date with Tim in the city tomorrow morning."

Her father grunted disgustedly. "We'll leave Mary's car with you, Mr. Wilson. Do whatever is necessary and bill me."

Mary stuck out a small and determined chin. "How am I going to get my car back so I can use it first thing in the morning?"

"I'd like to see this old-car show," Gus told her. "Suppose I fix up your brakes and drive it down to the Armory this evening?"

"We'll bring you home," Oldfield boomed. "I hope you have better luck with the brakes than the other fellow who worked on 'em. The real trouble started after he had fixed a small leak and added brake fluid. . . . Look us up in Box A-20."

Gus watched the old Autocar chug stolidly out. Then he got into Mary's car and gingerly tried out the brakes. A few stops told him most of what he wanted to know. He drove it onto the hoist.

Stan Hicks was returning from a tow job as Gus emerged from under the car rubbing a bit of black gummy substance between his thumb and forefinger. "The hose connections look like Swiss cheese," Gus muttered. "Whoever the darned fool was who worked on these brakes, he added some of that war-surplus aircraft hydraulic fluid that garagemen have been warned not to use on cars. It's rotted all the rubber parts of the brake system. We'll have to clean out the line thoroughly and install new brake hose and cylinder cups. Give me a hand, Stan—I promised it for this evening."

IT PROVED to be a long job. By the time Gus had showered and changed, eaten his dinner and driven down to the Armory, the judging had been completed.

Tim Sheridan's steam car stood in the place of honor. A large blue ribbon dangled from its front. Pacing the floor before it, Oldfield chewed savagely at a battered cigar.

"Where've you been?" he challenged Gus. "Never mind. Got the car? Where is it?"

"Down the street," Gus said mildly, falling into step alongside Oldfield as the other headed for the door. "What's up? I see Tim won the show."

"Pigheaded judges! Gross discrimination! He won the performance test and five minutes later his old teakettle ran out of steam right in front of the judges' stand!"

"Well, he *did* win the performance test," Gus remonstrated gently.

"He had no right to," Oldfield snapped. "My Autocar stood up right through the tests and it could go through them all over again. Besides I got hold of a note he sent to Mary right after the judging. Those two are up to something and I don't like it!"

As the two men threaded their way toward the door, Oldfield stormed on about Tim and Mary and swore that he had sure proofs that an elopement was in the making. "Let's get to the car before she finds it," he urged. "Mary has a duplicate key. Sheridan stole the cup from me, but I'll be danged if I let him steal my daughter!"

They had reached the main door. An attendant saluted Oldfield.

"Good night, sir. Your daughter said not to worry, she'd drive the Autocar back real slow."

"Drive my Autocar? When? Where? How?"

"Half an hour ago. I think you were argu—talking with the judges, sir. Mr. Sheridan who won the cup was with her."

Oldfield swore. "I wasn't sure till now that they meant to elope tonight. Mary's got a cousin who's a judge up in Glenn Hills. That's where they'll be heading. Come on, man! We can still get there in time to stop that marriage!"

Gus, grinning inwardly, managed to waste a full five minutes in looking for the car, but eventually they found it.

"You drive!" gasped Oldfield. "I'm winded—and besides I'm too mad."

They started uptown. The city traffic was sticky, and Gus, who can snake a car through a jam as fast as any taxi driver, managed to make it slow going. But out in the suburbs he had to quit stalling. "Step on it!" Oldfield urged. "We can get there first. That Autocar won't go over thirty. I'll take the tickets and pay any fines you get."

Gus stepped on it, goaded on by the irate father. He was thinking hard as he drove, remembering a place where the road forked.

The Y in the road showed in the headlights a few miles before Glenn Hills. The left fork led to Oldfield's destination, the right to Gus's. Gus swung to the right.

"Stop!" Oldfield yelled. "You're on the wrong road!"

Gus jammed on the brakes and brought the car to a neck-snapping stop. A glance over his shoulder showed him a dark roadside bank, and he backed into it—hard. Then he shot into the Glenn Hills road. But before they had gone a hundred feet, the engine missed, sputtered, and died.

"What's the matter now?"

"Dunno," Gus replied. "I'll have to check."

He got out, raised the hood, and began slowly—very slowly—to examine the engine.

THEY were in the same spot a short time later when headlights flared weakly from the direction of Glenn Hills. A car approached slowly and drew into range of the roadster's bright lights. It was Oldfield's Autocar—with Tim driving and Mary sitting beside him singing "My Merry Oldsmobile."

"What's the meaning of this?" Oldfield roared.

The Autocar stopped. "Why, it's Dad!" Mary said. "We're married, Dad. There's nothing you can do about it, so you might as well make friends with Tim. And, Dad—he knows about an old Ford that's simply out of this world!"

"Humph!" Oldfield grunted, but anger didn't show up very strongly in his frown. "I don't like this sneaking off with my car—I mean my daughter—to get married. But I've never been able to get a really good early Ford. Where is it—Tim?"

Seeing everyone busy, Gus walked quietly around to the rear end of the roadster and began digging sticky red clay out of its exhaust pipe. Just as he was finishing the job Tim came looking for him. He stared at the pipe, and then at Gus. "Dirty work, eh?"

Gus grinned. "Well," he said, "I knew that you and Mary needed a little time—and I don't know anything that'll stop a car quicker and deader than a nice plug of clay in its exhaust pipe. The bank I backed into right on the other side of this fork was made to order for the job." END

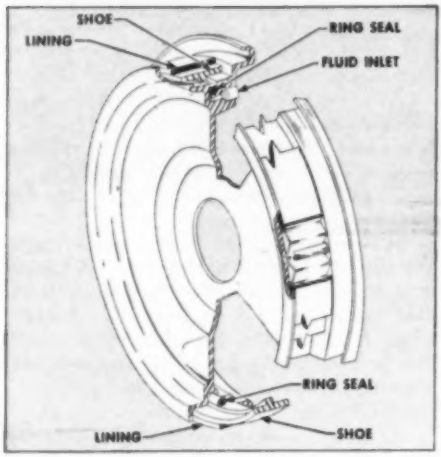

New Brake Has Fewer Parts

ADAPTED from a successful aircraft brake, this new hydraulic automobile brake has fewer parts than the conventional type. A product of the Glenn L. Martin Company, it's now undergoing extensive tests on cars.

A continuous flexible ring seal fits in a groove in the brake shoe support. When the pedal is operated, hydraulic fluid enters the groove under the seal. This forces out the seal and brake shoe, causing the shoe to make virtually a 360-deg. engagement with the lining. It's expected that this will make linings wear much longer. The new brake doesn't require the wheel cylinders, pistons, and linkages found in the ordinary type.

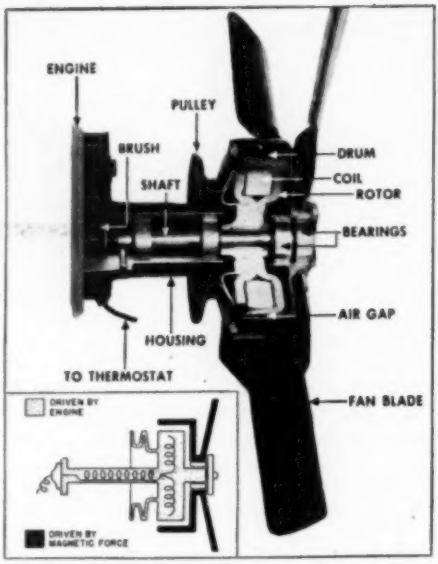

Ford Fan Runs Only as Needed

A CONTROLLED fan offered by the Ford Motor Company runs only while the engine is warm. In cold weather, it seldom starts.

Its heart is the Dynamatic Drive Ⓣ developed by the Eaton Mfg. Co., of Cleveland. This is an electromagnetic unit consisting of two basic parts, a coil and an outer drum on a common shaft. Belt-driven by the engine, the coil revolves constantly.

When the water temperature rises, a thermostat in the radiator hose shoots current to the coil. Magnetized, the coil causes the drum (and attached fan) to revolve in unison. The thermostat assembly varies the voltage with water temperature, speeding up or slowing down the fan as cooling requirements change. The fan is available only as a V-8 accessory for '42 to '48 models.

AIDS TO MODERN LIVING

IN ORDER to give it plenty of elbow room, the Aids to Modern Living department has been moved from its usual place to pages 298 to 301 in the back advertising section. There more space will be available as needed to tell the story of ingenious new household products as they come on the market. We think you will find the department—which is already one of the most popular in PS—bigger and better than ever. And the space it leaves behind will give room for more articles on new projects and techniques you use in your own shop.

Mechanics and Handicraft

Building Installing Concrete PAGE [illegible]

How to Repair Tile Walls PAGE [illegible]

Telescopic Glasses PAGE [illegible]

Ball-Game Portable Radio PAGE [illegible]

This trouble light remains kink-free, no matter how often it's reeled in or out. See page 198.

In any woman's room, this handy jewel box gets a place of honor on the dressing table. Notice the crinkly effect produced by a gesso finish.

Dresser Box Shaped with Bandsaw

THESE decorative boxes introduce a couple of novel twists. They're shaped with a bandsaw and given a textured finish with several coats of gesso paint.

The basic steps are conventional. You assemble the stock into a closed box with nails and glue and later saw it apart to produce a perfectly fitting lid. Soft wood is the most suitable material. For adequate cutting depth, stock for the sides should be at least ¾" thick.

Before assembling the box, choose your bandsaw pattern and transfer it to the piece of stock that's to be the top. Drive the nails within the pattern, not in the waste.

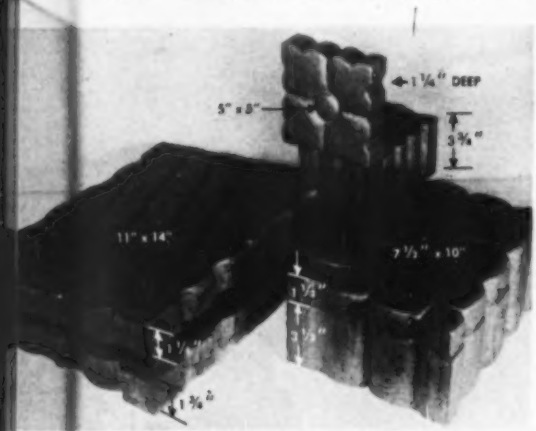

This trio of boxes suggests different designs you can use. The box on right is a sewing kit; the large one is suitable for correspondence.

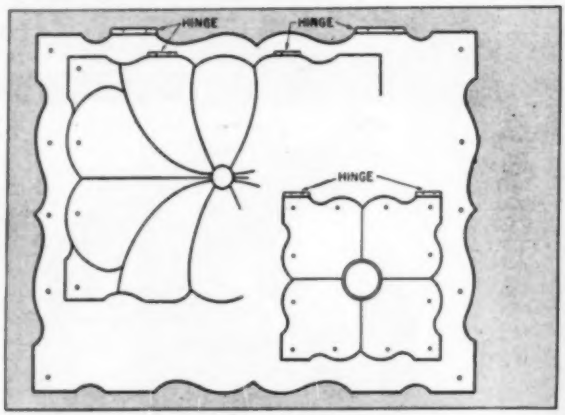

Apply the pattern to the top before nailing and gluing together the stock into a closed box. These are patterns for the boxes at left.

Bandsaw the box to shape, following an outine traced on the top. After sanding thoroughly, saw the box apart to make the lid and body.

Carving the lid doesn't require the hand of an expert. You can make simple, rough cuts and then finish with fine sandpaper and a file.

After the glue is dry, bandsaw the sides to the pattern applied on the top. Sand the box well before cutting it apart. Fit the lid with brass hinges. An accompanying sketch shows where they may be located.

Boxes of this type are very effective when antiqued with several coats of gesso. Here's how I make gesso:

Dissolve a half cup of powdered or flaked glue in a quart of water over a low flame. Remove from the fire and stir in enough whiting to make a thick, creamy mixture. Dry pigment or metallic powder of any color may be added to this base. Divide the base so you can make several colors.

When cool, the mixture becomes jellylike, but it can be restored to workable consistency by heating over hot water in a double boiler. Apply with a brush. For durability, spray on a final coat of thinned shellac.—*Doris Aller, San Francisco.*

Smooth and round the edges with a file. For an antique effect, apply paint of various colors and rub off most of each coat.

Tiny Model Rides Match Box

BEFORE you start work on this ornamental match-box case, here's a warning. When your friends see it, they'll probably force you into quantity production.

But if you insist on going ahead, red cedar, walnut, or maple is excellent material for the base. First, glue the top and bottom to the side piece. Then put a spacer block in the slot, transfer the pattern to the top, and cut on a bandsaw or jigsaw, using a fine-tooth blade to minimize splintering.

Make the ship hull of a dark wood so the light maple sails will stand out. Multiple cuts with a jigsaw are a simple way of making the curved sails. Sand all parts smooth before assembly; then cement them together and finish with several coats of lacquer.—*Gus Bouquet, San Quentin, Calif.*

Glue the ship model to the base in a diagonal position. Cement a bit of felt under the case.

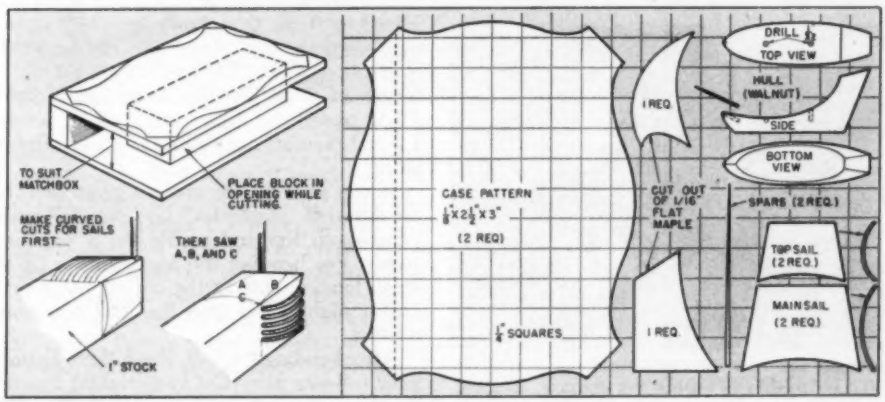

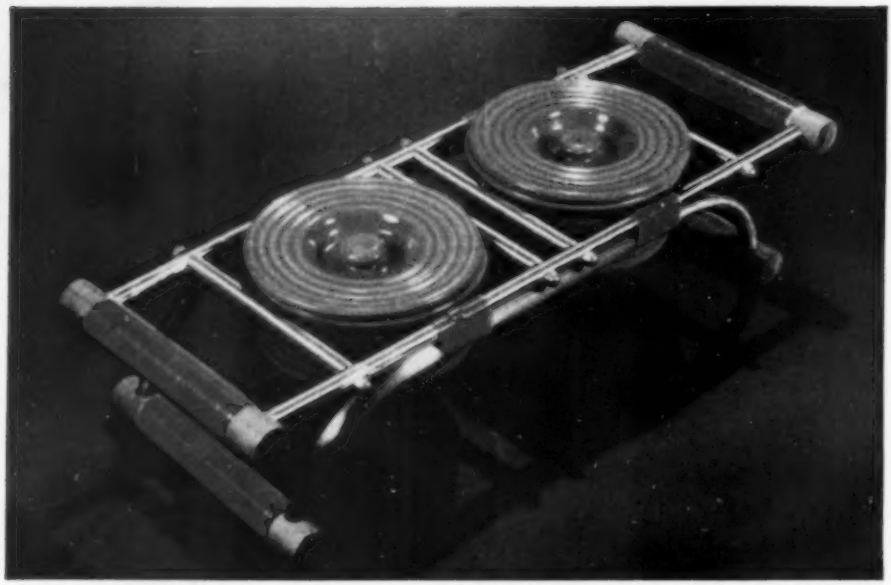

Aluminum and bright plastic cord contrast with the soft tones of the pottery in this rack.

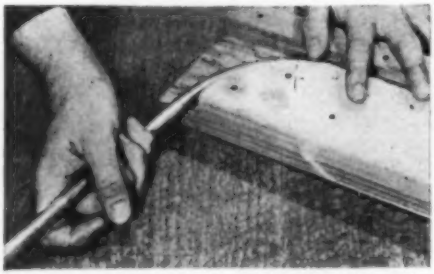

With a bending jig of scrap lumber, shape the curves of the legs. It is wise to use a paper pattern to check the curves after forming them.

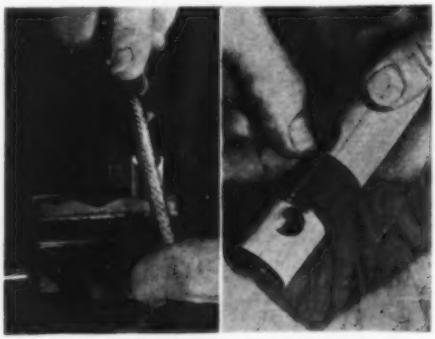

Shape the ends of the crosspieces with a rat-tail file so they fit against the top rails. At right, a finished handle is bound with plastic.

Aluminum Rack Holds Hot Dishes

GAILY colored pottery, burnished aluminum, and gleaming plastic combine to make this casserole rack an attractive and useful addition to your table service.

The dimensions are determined by the size of the dishes to be used. The casseroles I used to fit the rack shown here hold up to four servings each. Besides the dishes, you'll need about 8′ of ½″ SO aluminum tubing, a length of 3/16″ rod for draw bolts, eight 10-32 plated cap nuts, and 3′ of 1″ dowel. I found the nuts and tubing at a war-surplus store.

If you vary the dimensions given here to fit different casseroles, lay out full-scale plans—both top and profile—on a piece of paper. For bending the legs, build a jig of scrap lumber, cutting the curved block to a radius slightly less than the final curvature desired.

After bending the legs, check them against your full-size plan. Cut two straight lengths for the upper rails and smooth off the ends

Peen over the ends of the rivets. Then file down close to the tubing so as to avoid bumps under the plastic.

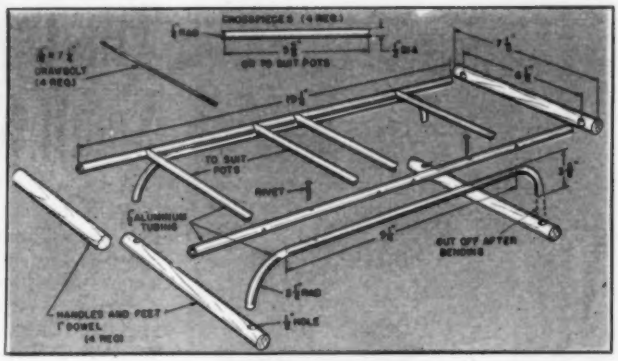

with a file and abrasive cloth. Use a rat-tail file to give the ends of the crosspieces the ¼" radius shown in the drawing. Be sure all crosspieces are the same length.

Using medium-fine abrasive paper or cloth, sand each section of tubing with lengthwise strokes. This removes surface scratches and gives a pleasing finish.

Make the drawbolts from 3/16" brazing rod, Bessemer rod, curtain rod, or similar material. Cut four identical pieces and thread all ends 10-32. Make the cross handles and feet of 1" maple dowel, drilling the ½" holes ¾" deep. Be sure the holes are perpendicular to the dowel axis and parallel to each other.

Clamp the top and bottom sections together and drill the four rivet holes. After peening over the aluminum rivets, file both ends close to the tubing so that the cord will cover them smoothly. Give the wood and metal a coat of clear lacquer. For wrappings use plastic handicraft cord or copper wire. If plastic cord is used, start and finish the wrapping with a dab of cellulose cement.—*Bill Luther, Los Angeles, Calif.*

Plastic Sandwich Plate Revolves on Wooden Base

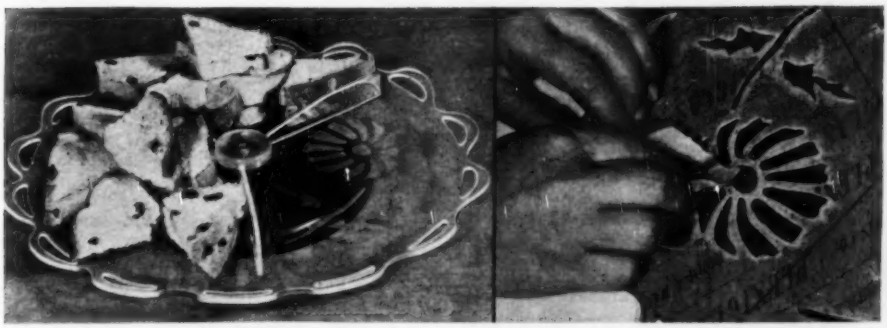

THIS three-compartment server is of ⅛" clear plastic. Before removing the masking paper, cut out the edges. Then lay out the design in each compartment and with a razor blade cut through the paper around each figure. Peel off this paper, revealing the design as a stencil. Frost the exposed areas by rubbing the plastic with fine sandpaper.

The plate revolves on a short length of ¼" dowel that is glued into the base. The turned plastic cap—at least ⅜" thick—is cemented to the top of the dowel. Be careful that no excess cement enters the ⅜" hole through the center of the plate. Model-airplane cellulose cement will hold the cap on and the three dividing wings fast to the plate.—*Elma Waltner, Hurley, S. D.*



Tilt-Top Table Fits Small Space

ONE feature of this tilt-top Chippendale table is its size. Dimensions are only about three-fourths those of the customary tilt-top. This reduction makes it good as an accessory piece in a room or apartment where space is at a premium. Either walnut or mahogany is suitable material.

An ordinary casement fastener locks the top in the horizontal position. The table post comes to the center of the 4" square tilting block. A ¾" by ¾" tenon on the post holds the two pieces together. Round off the swivel edge of the block to get clearance for tilting.

The top pivots on two 3/16" dowels. These are set in holes drilled part way through the two 11½" brackets that are screwed under the top. Install this entire assembly so the casement-fastener tongue moves freely but firmly into the mortised strike.

Taper the legs from ¾" to ½" and drum-sand the vertical edge to a concave section for a perfect joint with the post. A mitered 3/16" half-round molding borders the top. —*Norbert Engels, South Bend, Ind.*

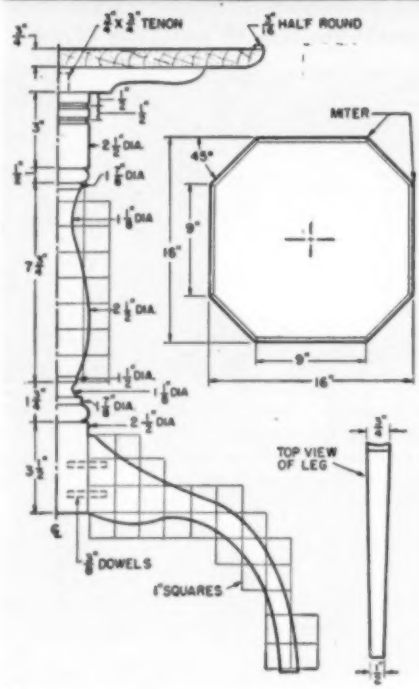

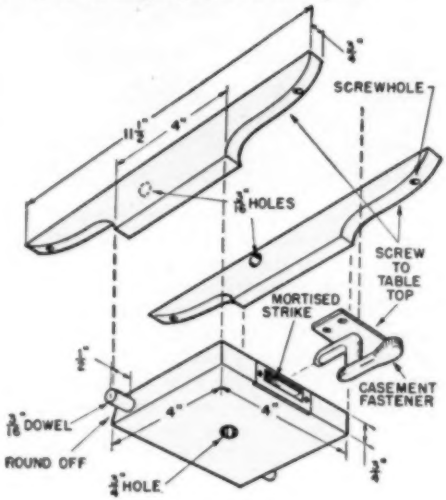

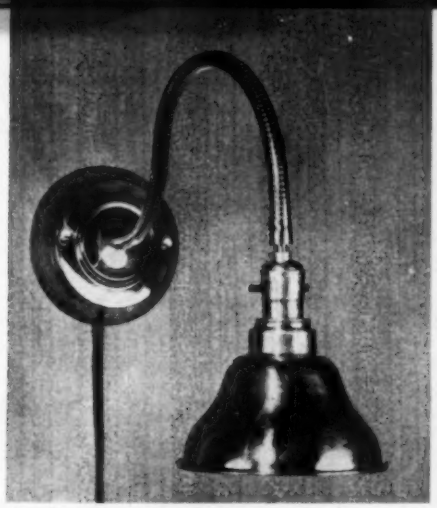

Double-purpose lamp of gleaming chrome has 24" gooseneck, and serves as wall or desk light.

For desk use, the lamp is fitted with 40-watt showcase bulb that has a built-in reflector.

Gooseneck Lamp for Wall or Desk

By careful shopping, I bought the parts for this combination lamp for less than $5. Simple to assemble, it calls only for common hand tools. Here's what you'll need to duplicate it:

A small wooden salad bowl; a chromium-plated gooseneck 2′ long; a lamp cord and plug; a nut to hold the gooseneck to base; and a chromium-plated socket, ceiling canopy, and reflector.

If the wooden bowl is too large, cut it down. Then drill these holes: one in the center of the bowl for the gooseneck; two on opposite sides of the bowl to bolt it to the canopy; matching holes in the canopy; and a hole near the edge of the bowl for the cord. The diagram at right shows you where to locate these holes as well as how to attach the wall bracket. For desk use, weight the base with lead fishing sinkers.—*William Norton, Manhattan, N. Y.*

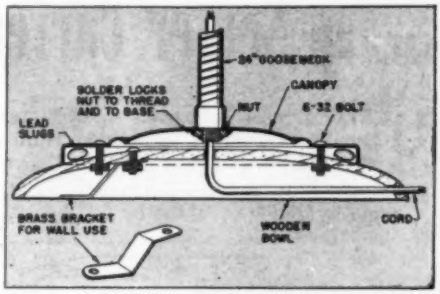

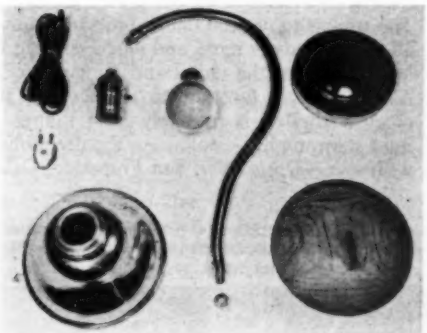

Only nine parts, not including brass bracket for wall use, are all that go into the lamp. In this photo, bowl already had been trimmed.

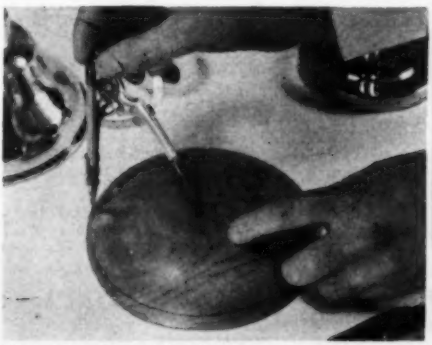

If wooden bowl for the base is too large, use a compass to lay out a 6¼" circle on the bottom, and then cut around line with keyhole saw.

Laden with fruit or flowers, this roughhewn redwood scoop forms a handsome centerpiece.

Scoop Server Carved from Redwood

HERE'S a piece that looks as if it had been turned out by an old-time craftsman. Despite that, power tools will save you much of the labor needed to carve it out.

Begin by gluing up a 4½" by 6½" by 16" block of redwood or pine. Lay out the outlines on the sides of the block and cut the profiles on the circular saw. A few cuts may have to be completed by hand. The finger hole in the handle is made with a coping or keyhole saw.



You can use a drill, Forstner bit, or router to remove most of the wood from the center of the scoop. Complete the job with gouges, chisels, and sandpaper, rounding all edges. The trick is to use the bench tools to remove all signs of power tools, and when sanding to leave traces of the chisel and gouge planes. A natural-color finish, with pumice and oil or clear shellac, is probably best, though a light stain might be suitable. Finally, polish with wax.—*Doris Aller, San Francisco, Calif.*

Rough out the scoop on the circular saw, tilting the table for angle cuts. Much of the wood in the center may be drilled out. Note the holes drilled in the handle for inserting a coping-saw blade. Cut out the remaining waste with chisels and wood-carving tools, rounding all edges.



Chess Set Is Carved from Steatite

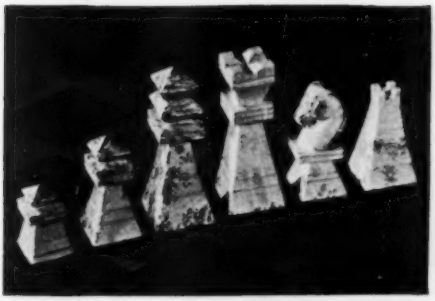

Not too far in design from classic chess shapes, this set is unusual in that it is made entirely without a lathe. The square-based pieces are sawed and carved from Sculpstone Ⓣ, a form of steatite sold for handicraft uses.

Pleasing to the touch, this material is excellent for chessmen. It's soft enough to be worked with simple hand tools—a scraper, penknife, or even a nail file. There's also sufficient weight to give a nice heft and good stability on the board. Sculpstone comes in various colors, and you will of course want both light and dark stock.

Since chessmen are made in many sizes, no dimensions are given. However, the drawing below shows relative sizes, and is about right for a standard board.

Rough-saw the blocks to size, saw the side tapers, and complete the carving with knife and scraper. Smooth the finished pieces with fine steel wool and apply oil to bring out the tone. The surface can be made scratch-resistant with a plastic hardener.

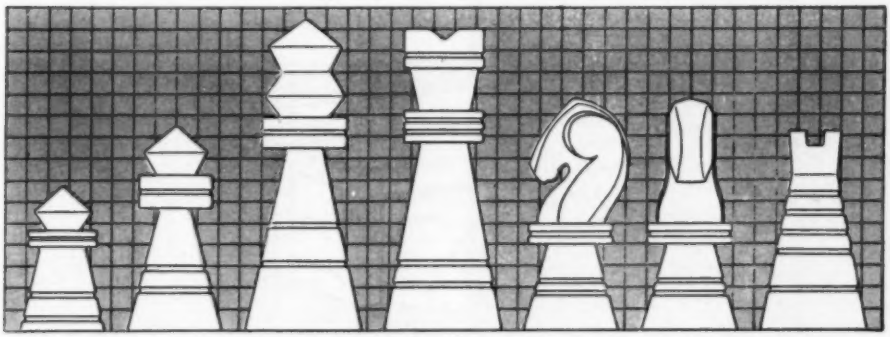

Internal Carvings Made with Phonograph Needles

If you'd like to try miniature internal carving of plastic, try cutting tools ground from phonograph needles. I developed these after making an unsuccessful search for really small cutters. I first ground three sides to the needle point, and then inserted the shank of the needle snugly into a hole drilled in the end of a 1″ length of ⅛″ steel. A collet to hold the 1/16″ needles can be bought if you prefer.

In grinding, hold the needle in a pin vise and use a small wheel to form the flats. These should be equal in width, and may be hollow ground (slightly concave) to make the edges sharper. Be careful not to overheat and soften the fine point.—*Erwin S. Plavec, Chicago.*

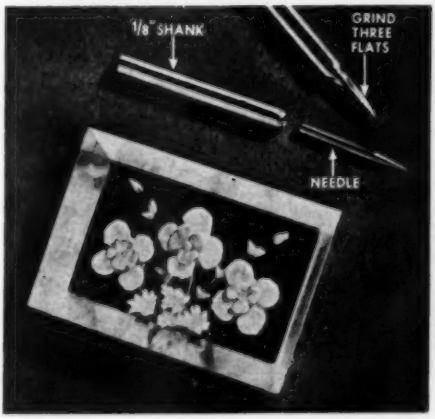

Beauty and utility are combined in this radiator cover and hall chest of natural-finish oak.

Turning Radiators into Furniture

Enclosures of the right kind disguise these ugly ducklings as useful pieces without stifling heat circulation.

WITH the end of warm weather in sight, this is the time to build radiator covers. But before deciding on a design, consider how the cover will affect the heating effi-

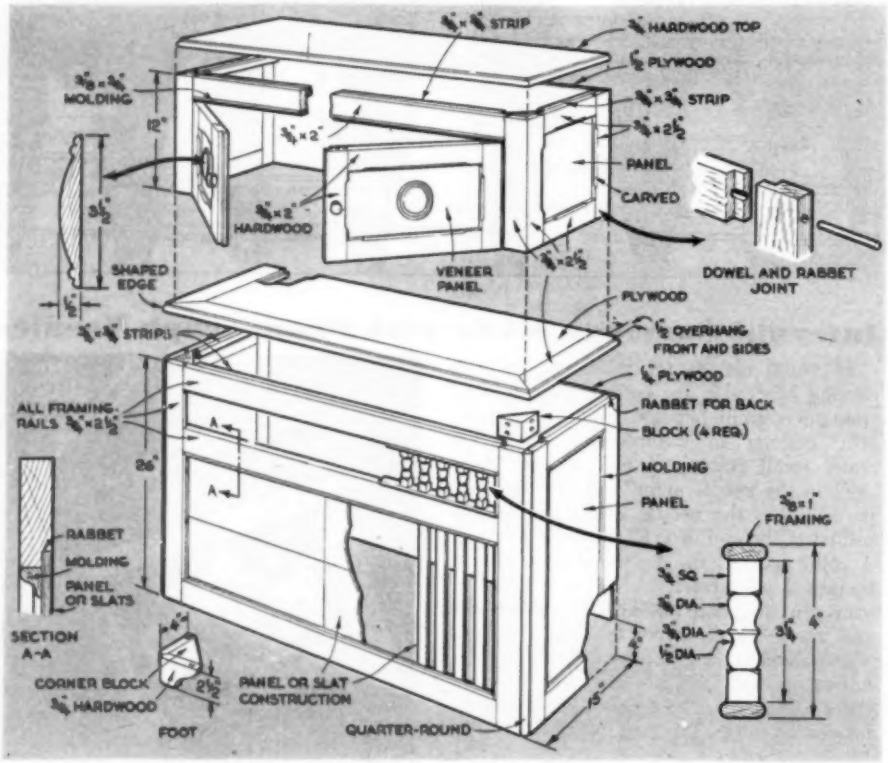

ciency of the radiator. A properly designed and constructed enclosure will pay off in appearance plus a more comfortably heated room. The wrong cover will cost you wasted fuel, to say nothing of the discomfort of a poorly heated room.

You'll be safe in following these two general rules: Stay away from covers that solidly enclose too much of a radiator's heating surface. At the same time, avoid enclosures that fit too loosely. University of Illinois engineers, experimenting in a temperature-controlled building with various types, found that snug-fitting enclosures—everything else being equal—were more efficient.

Here's another tip: Build your covers with protecting backs. The experimenters tested both a bare radiator and an enclosure with no protecting back. They checked the temperature of the inside surface of the wall just behind both. In both cases it ranged from 116 to 121 deg. F. Then they installed a back in the cover and the temperature at the same spot dropped to 76 deg. F., indicating a considerable reduction in heat loss through the wall.

Many radiators are located beneath windows, and here again an enclosure pays off. A solid top on the cover deflects the warm air out into the room, preventing it from rising straight up to pass over the cold panes and consequently to lose heat.

The inside of enclosure backs and tops should be insulated. You can use asbestos sheeting as shown in the photograph, but better still is sheet metal or heavy cardboard curved over the top of the radiator and down the back. If cardboard is used, glue aluminum foil to the surface facing the radiator. You can buy the foil in rolls in most houseware stores.

The over-all dimensions of a cover are governed, of course, by the shape of the radiator. Select a wood and finish to harmonize with the other furniture. The bedroom cover shown here was built of softwood finished in white enamel. Softwood also was used in the living room, but with a mahogany stain. The hall cover and chest were made of natural-finish oak.

With all the covers described here, a desirable modification probably would be the use of slats or metal grille in the ends. This would expose more heating surface to air circulation. You also may want to include a small hinged door in an end for access to the valve.

In building the combination hall cover

Photos on this page show what a little ingenuity will do in building a radiator cover.

Rear view of the combination bookcase and cover. Note how legs are cut to fit baseboard.

Completed project has space for books on both sides of radiator. Radio fits in shelf at left.

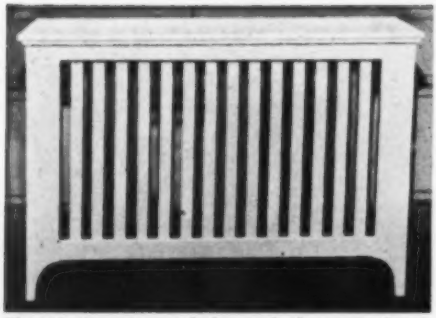

Slat design is good for a bedroom radiator cover. Enamel it white or in colors of room.

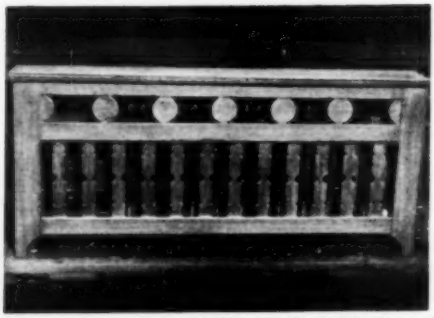

Living-room cover is built on plan of bedroom cover with minor variations for decoration.

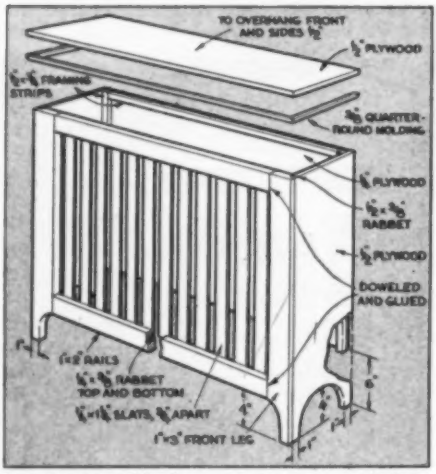

Here's plan of bedroom cover. Cut out the legs first and join them to rails by glue and dowels.

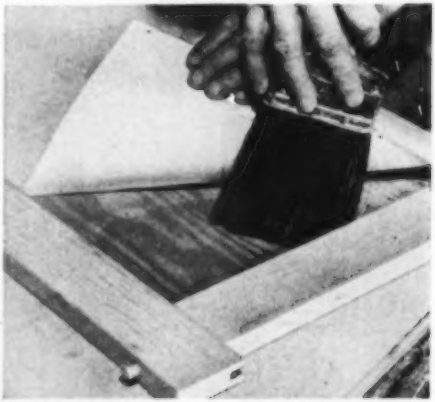

For insulation you can use asbestos sheeting as above, gluing or tacking it in place, or you can use sheet metal or foil-covered cardboard.

and chest on page 186, make the cover first —assembling the sides, front, and top separately. Join the rails with rabbets and dowels as shown. Glue and nail the turned posts of the grille inside the ¾" by 1" frame, and then glue the assembly into the front section. Join the sides and front by the four triangular blocks, gluing and screwing them to the vertical rails. Fill the open corners with quarter-round molding.

Since only the outer edges of the top will be seen when the chest is in place, you can save some hardwood here. Rabbet the three 2½" oak border pieces for the plywood center panel. Use wood screws to attach the top to the ¾" by ¾" cleats. Follow the same construction methods in assembling the chest, making it 3" shorter and 1½" narrower than the cover. That will leave a 1½" ledge on the front and sides of the cover. Mortise butt hinges into the rails and edges of the doors.

To position the chest on the cover, glue a dowel in the bottom of each lower corner of the chest. Drill matching holes in the top of the cover. Then set the chest on the cover. The top of the cover will serve as a floor for the chest.

The bedroom and living-room enclosures are built alike, except that a third rail was added to the latter cover, along with wooden disks of 1" stock. The slats of the living-room enclosure were drilled and notched for decoration.

Cut out the front legs first, rabbeting for the plywood sides. All the horizontal rails are 1" by 2" and are rabbeted for the slats, which are glued and tacked in place. In the living-room cover, the disks are glued and doweled between the rails. Allow the tops of these two covers to overhang the front and sides by at least ½". The ¾" quarter-round is attached beneath. END

PS Projects Built by Readers

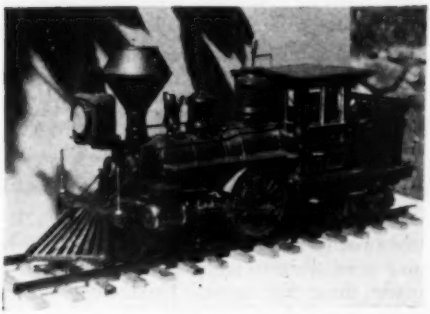

Pioneer Wood-Burner. Memories of diamond-stack engines, seen from his home when a boy, impelled Orrin W. Brusie, of Millerton, N. Y., to build this wooden scale model of the C. P. Huntington. The link hookup was changed slightly from plans in PS so that the reversing links are raised and lowered by a rod running back to the cab. The wheels turn freely, allowing observation of the valve and running-gear action.

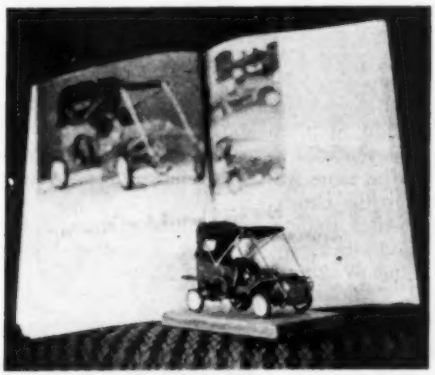

Thumbnail Steamer. It took Irwin F. Kenderdine, Jr., of Reading, Pa., about 50 hours to build this tiny model of a 1905 White steam car. Although the dimensions given in the article were to the scale of ¾" to the foot, he worked to the reproduction size of the drawings, which gave him a smaller, but still detailed, model.

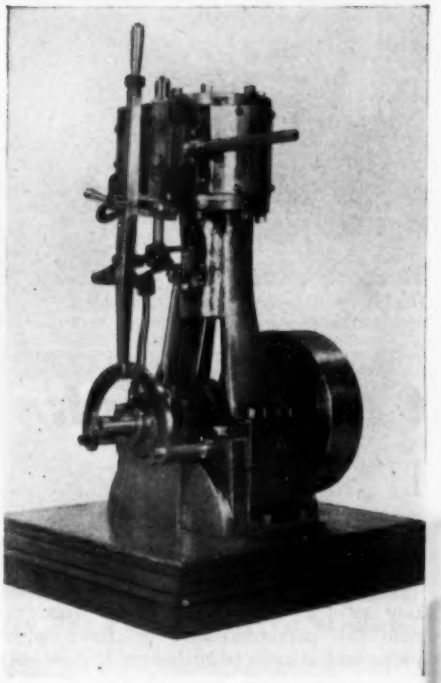

Steam Engine Reverses. Leon Conley, of Haddonfield, N. J., built this reversing steam engine from plans in POPULAR SCIENCE. The engine is a double-acting non-condensing one that exhausts directly into the air. Conley reports that the working model runs nicely, developing an estimated ⅛ hp. under test.

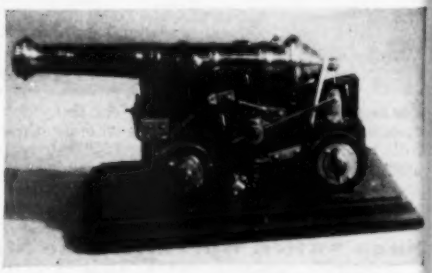

Brass Muzzle Loader. This 18th-century naval cannon was built by George H. Crosman, of the Canadian Naval Forces, from plans given in this magazine. More than four months of spare time was put into the project. Instead of using oak for the carriage, he worked with mahogany. All metal parts are made of brass.

Highly polished, these candleholders gleam and sparkle like crystal. They're made of plastic.

Bind the spiral tightly with tape. Leave this on until the top and bottom joints have set.

Candlesticks with a Twist

HERE'S an intriguing project for the craftsman who enjoys putting plastic through its paces. Columns are formed for these candlesticks by twisting three ¼" rods into a spiral at the center.

This is accomplished with a simple jig. Lay out a 2" circle on a scrap of wood, divide the circumference into three equal parts, and at each point bore a ¼" hole on a slight inward slant. Repeat with a 1" circle on a second piece of wood.

Now fit three 5" lengths of ¼" rod into the jig, put the entire assembly into an oven, and heat to 250 deg. Remove the assembly and twist the two wood pieces until you've made three full turns. Hold the wooden pieces parallel and let cool.



Form the spiral with this jig. Heat the whole assembly to 250 deg. and twist the jig three full turns. Saw off the projecting rod ends as necessary to make the holder stand level.

For the candle cup, chuck a length of 1½" plastic rod in the lathe, true up the end, and turn out a ⅞" recess ¾" deep. Polish with sandpaper wrapped around a dowel. Turn the outside as desired and cut to an overall length of 1⅛". Saw the 3½" base disk from ⅛" or ¼" sheet.

This done, tape the spiral column tightly, remove the lower jig member, and set the feet on the base. Mark their location and peel the masking paper from these spots. Put the ends of the legs into plastic solvent until slightly spongy. Then set them in place on the base and put a light weight on the top.

For a strong, invisible joint, leave the weight in place about 24 hours. Join the other ends of the ¼" rods to the candle cup in the same way, this time resting a weight atop the cup.

After buffing and polishing, protect the candlesticks by applying a coat of wax.—*Elma Waltner, Hurley, S.D.*

Snap Switch Operates Bike Stop Light

STARTING with a Microswitch ⓣ, I've installed a stop light on my son's bike that beats anything else I've seen. The switch is the overtravel type with a springy contact arm. I clamped the switch to the horizontal fork member just above the slack lower half of the chain and wired it in series with the light circuit. As soon as the brake is applied, the lower part of the chain becomes taut, pressing up the switch arm and closing the circuit.—*Freeman Smith, N. Hollywood, Calif.*



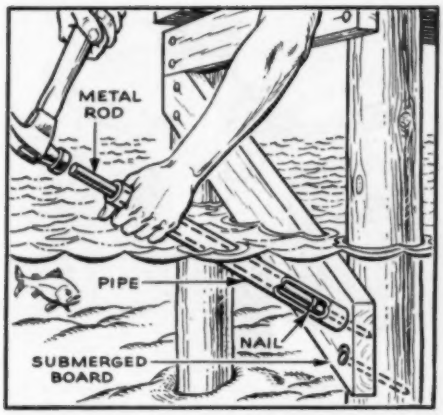

Hammering Nails Under Water

A LENGTH of small-diameter pipe and a metal rod will drive nails in submerged boards without splashing. Place the pipe on the spot where you want the nail, drop the nail through the pipe, and insert the rod after it. Hammer the rod to drive the nail home.—*A. Armstrong, Missoula, Mont.*

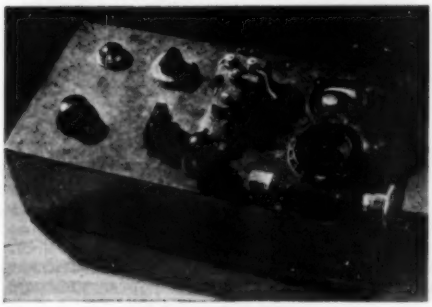

Gadgety Box Amuses Children

MY YOUNG son's fondness for snapping the radio off and on and twisting the dials was satisfied with this safe electrical toy. Built of scrap radio and electrical parts, it features a snap switch that lights a large, jewel-type pilot light; a radio key that rings a doorbell; and other knobs and dials that just turn around or that give a solid click, such as an aircraft magneto switch. Power can be dry cells or a doorbell transformer. —*E. P. Bonner, Falls Church, Va.*

Toy Jet Engines Drive Models

JET cartridges, burning a modified form of cordite to propel model planes, cars, and boats, have been announced by Imperial Chemical Industries, a British explosives manufacturer. The cartridges are made in various sizes from a tiny unit giving ⅛-oz. thrust to a 2″ long by 1″ diameter unit producing 1¼-oz. thrust.

A typical cartridge is a cardboard tube 1⅞″ long and ⅞″ in diameter. It is closed at one end and has a thin metal disk at the other. In the center of the disk is a tiny vent, the jet. The driving charge, ignited by a match or burning cigarette, burns from 10 seconds to several minutes.



Ball-Point Pen Hides Money

MOST ball pens have plenty of room in the barrel around the thin ink-supply tube to hide a large-denomination bill or a valuable paper. Wrap the paper tightly around the tube and push it well down in the pen-tip recess as shown above. Then replace the barrel.—*Jack Wilson, San Pedro, Calif.*

Keeping the Home Shipshape

A small penlight by the bed may come in handy if you want light without disturbing other sleepers. A lipstick container soldered to a metal strip will clamp it on the bed rail.

For convenience in carrying cans of thinner, paint, varnish, and the like to a job, use a notched wooden clothes hanger as shown. It's a cinch to carry two or three cans in one hand.

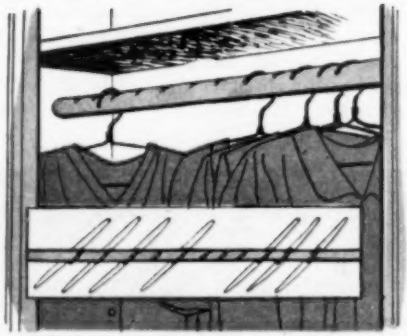

Cut diagonal grooves in the clothes pole of a shallow closet. This will turn the hangers at an angle and prevent the clothing from being crushed between the wall and closet door.

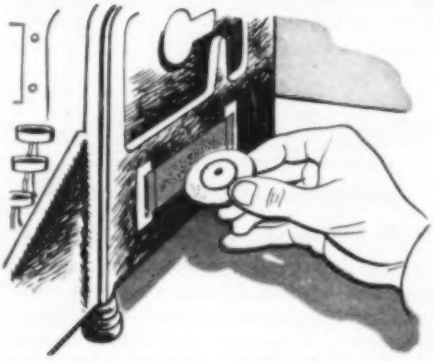

Only a clean eraser can make a clean erasure. You'll always be able to get a clean edge on your typewriter eraser if you tape a strip of manicurist's emery board to the machine.

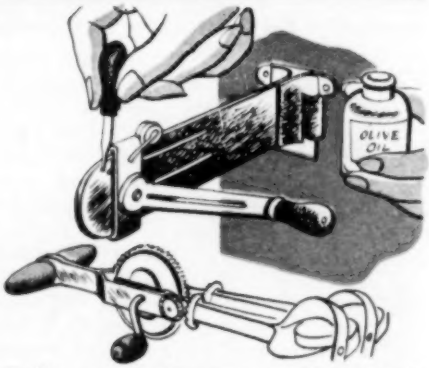

Wall-type can openers, egg beaters, and similar appliances need lubrication. If you're reluctant to use machine oil on them, try olive or cooking oil as a substitute lubricant.

Brown sugar left on the shelf soon dries out and hardens into a solid chunk. To break it up, remove the lump from the box and rub it back and forth on a kitchen grater.

Fitted with a clip, a stirring spoon can be attached to the side of the pan while not in use. Form the clip from aluminum, brass, or stainless steel. Rivet it to the handle.

Instead of measuring out soap, bleach, bluing, or softener every time you wash clothes, put up the proper mixtures in glass jars. You can make enough to last for a few weeks.

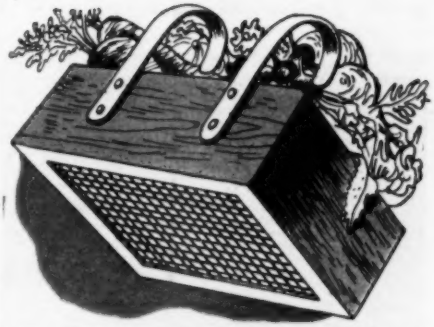

Vegetables gathered from the garden in this basket can also be washed in it. Make a wood box small enough to fit in the sink and use a piece of hardware cloth as the bottom.

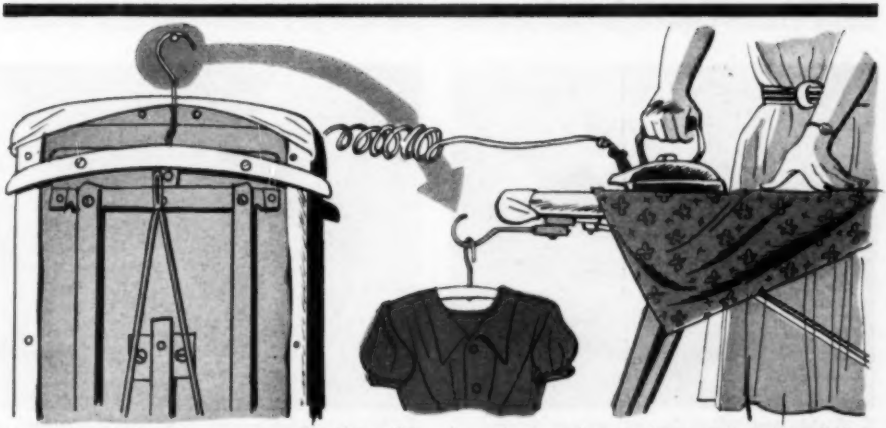

A wooden clothes hanger screwed to the underside of an ironing board serves both for hanging the board in a closet and as a hook from which you can suspend freshly pressed clothes.

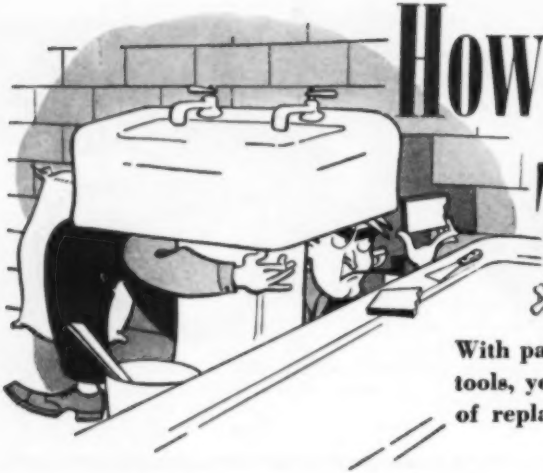

How to Repair Tile Walls

With patience, know-how, and simple tools, you can do a workmanlike job of replacing loose or damaged tiles.

By Joseph J. Moro-Lin

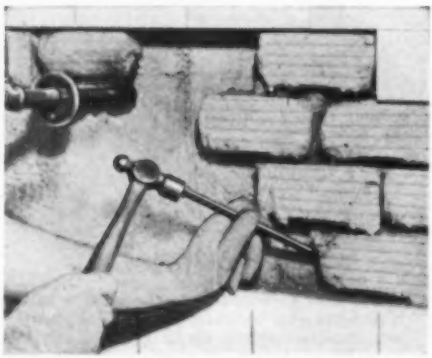

1. Removing the old mortar. A pointed chisel is inserted between the slabs and the scratch coating. Chisel is tapped lightly, slab pried out.

2. Tile is cleaned thoroughly, especially on edges where cement grouting has adhered. Flat tool, such as a narrow putty knife, is handy.

5. Voids are filled in and excess mortar removed after each row of tiles has been set in place. Fresh-laid row is steadied with board.

6. When necessary to trim a tile, scratch it with a sharp-pointed tool, such as an ice pick. Another tile can be used as a straightedge.

THREE things are important when you tackle a tile repair job: cleanliness, mortar of the right thickness, and patience. You can't rush the work, especially if it's your first attempt.

Tiles may be loosened by settling of a building, or perhaps a wall must be opened to repair plumbing. In either case, save the pieces removed from the wall. If you have to buy replacement tiles, match them for color and size. Take a sample to a dealer. Usually he'll be able to tell you who manufactured it.

To go into a wall for plumbing repairs, you'll have to break the first tile. Use a sharp-pointed chisel at the corners of the tile. In most cases the corners are free of mortar backing. Place the chisel on a corner and with light hammer blows—to avoid damaging adjacent tiles—crush in the corner. Continue chipping gently until you reach the edge of the backing. Do this at all four corners.

Then, with a sharp, flat chisel, carefully chip the tile free of the mortar. The first tile usually is the most difficult to remove, the others requiring little more than prying from their mortar backing. Use the flat chisel for this, inserting it behind a tile, perhaps tapping it easily, and then rocking it back and forth. You may have to do this at several spots along the edge. When all tiles have been removed, take the mortar backing off the wall in the same way.

If the wire lath on the wall is replaced, it will need a scratch coat to take the tile mortar. For the coat, mix four parts of sand with one of cement, adding water to bring it to a butter consistency. Trowel it on and let it dry for an hour. Then roughen the surface with a piece of lath.

Clean the removed tiles and soak them in

3. Lime paste is prepared by sprinkling lime into water slowly to avoid lumping. Sand and then cement is added to make mortar.

4. After mortar is scooped onto back of tile, tile is slowly but firmly pressed into place and given final setting by tapping with trowel.

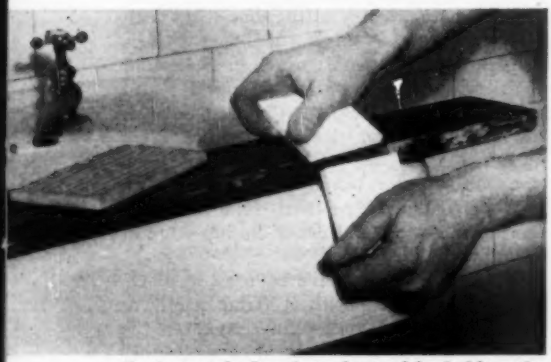

7. A straight break is obtained by holding the scribed tile at each end and sharply striking it against the solid edge of a table or bench.

8. Edges of tiles trimmed to fit at end of a line or around obstructions—such as pipes—are smoothed with a whetstone or a file.

9. In making irregular cuts, outline is first marked. Pincers are then used to bite off small pieces until desired shape is reached.

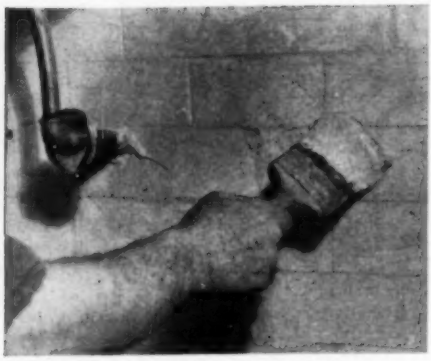

10. Final step is filling joints with grout, a paste of white cement and water. It is applied generously. Make sure all joints are filled.

11. Immediately after applying grout, excess is removed with damp cloth or sponge. It may be necessary to go over area several times.

water until they stop bubbling. Tiles are porous and, if not soaked, will absorb moisture from the mortar, making a weak bond.

While the tiles are soaking, mix the mortar backing of six parts sand, two parts hydrated or finishing lime, and two parts cement. First prepare the lime by slowly sprinkling it into a container of water, until the water will hold no more. It is preferable, but not essential, to soak lime overnight. To make mortar, first mix the soaked lime and the sand. Then add cement. Add small amounts of water until the mortar is pliable and, when scooped up, will stand together. If you use too much water and find the mortar soupy, add more cement.

With the mortar ready, sprinkle the scratch coating with water. This prevents rapid drying of the mortar, forming a better bond between mortar and coating. Before applying mortar to the back of a tile, scoop a chunk against a vertical surface and, with an upward motion, let it roll off the trowel. Repeat until the mortar has a round shape. Rolling the mortar is important. The action forms a thin film of water on the ball and gives the mortar a clean, smooth surface, making a better bond between mortar, tile, and scratch coat.

Now you are ready to set the tile. Roll up a ball of mortar 1″ thicker than the distance from the back of the tile to the rough wall. Place it on a tile and scrape off the mortar for ½″ from each end of the slab. Begin at either end of a line, resting the edge of the tile on the top edge of the tile below. Push the tile almost into position and line it up by tapping with the handle of the trowel. Do not push it too far toward the rough wall. It is better for it to lean outward a bit from its intended final position.

After setting a row of tile, line it up with a straightedge. A 1″ by 3″ board that is long enough to extend an inch or so beyond each end of the row will do. Lay the board along the row and tap it with the handle of the trowel until the tiles are lined up. Press mortar behind any tiles that have been pressed in too far, bringing them out. With the board held in position, remove excess mortar, fill voids, and clean the top edge of the newly laid row.

When all the tiles have been set in place, go over the area with a damp cloth or sponge, cleaning it thoroughly. Next mix the grout by adding white cement to water until the mixture reaches a thick-cream consistency. Apply it over the entire newly tiled area. Then wipe off the excess. END

What's Your Ingenuity Quotient?

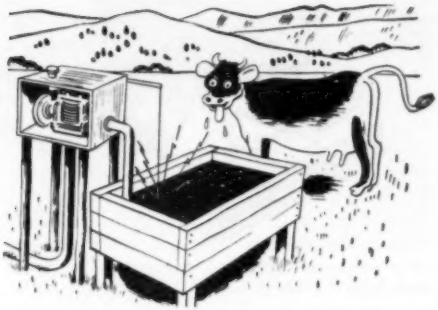

A short circuit can cause trouble, but I rigged one to save trouble. For an automatic stop on a magneto-type gas engine that pumps water in a distant pasture, I ran an insulated wire from the spark plug to the water tank. The wire ends near the top of the tank and the engine is grounded. Now when the water reaches the wire, it shorts out the engine.—*P. W. Kaltenbach, Long Valley, S. D.*

A hole in our fence lets rain water drain from the yard. However, stray dogs used the hole as a gate to come in and dig up my garden, while my dog used it as an exit to go wandering. So I built a sliding gate with an open can as counterbalance. When rain fills the can, the gate goes up and the yard drains. A small hole in the can empties it, lowering the gate when the rain lets up.—*W. K. Chi, Tangku, China.*

When I needed a table stand for a microphone, I found that a "plumber's helper" served the purpose well. I cut the handle down to the proper length and then, since I had no die, I trimmed the handle to fit the ⅝" socket on the mike. Vibration pick-up is reduced considerably by the shock-absorbing qualities of this stand and a coat of metallic paint does a little to conceal the stand's ancestry.—*Robert Hartung, Huntertown, Ind.*



We had a wise-guy mouse who thumbed his nose at all the usual traps. But he finally used a key to lock himself in this trap when he sneaked under the propped-up glass bowl to get the cheese on the end of the key.—*Roland Cueva, Manhattan, N. Y.*

Have you pulled off a smart one lately? We will pay for acceptable contributions showing ingenious solutions of problems in the home, shop, garage, or camp. It doesn't matter if it's wacky—if it works. Use government postcards only. Contributions cannot be acknowledged or returned.

Collector Rings Feed Cord Reel

IF YOU'VE ever wasted time and patience untangling knots in a lengthy extension cord, you'll appreciate this homemade portable reel. Just place it on the floor, plug in the 6′ connecting cord, and walk away with the business end of the extension. Turning the crank rewinds the cord. The reel pictured here holds up to 500′.

The reel itself is one that wire is shipped on. I picked up this empty one in an electrical shop. It has stamped end disks with rolled edges, and the ends are solidly clamped to a core of steel tubing. I used a ¾″ hardwood dowel as an axle, which just fitted the holes in the end plates. An 8-32 bolt goes squarely through both core and dowel.

Current is fed to the cord through two carbon brushes riding on two collector rings. The brushes are old flashlight-cell carbons. The rings were cut from 16-gauge sheet copper to fit into the grooves of a soft-rubber sink stopper on the outside of one end of the reel. Another stopper is used inside the reel as an insulator.

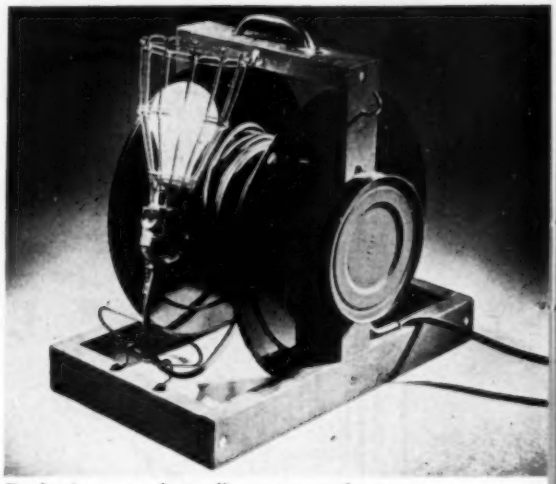

Reel takes up only small space, provides power and light hundreds of feet from nearest outlet.

Four 6-32 flathead brass machine screws were soldered to each ring at equally spaced points around the circumferences. Matching ¼″ holes were punched in the rubber disks, and drilled through the end of the reel. Each screw was insulated from the end of the reel by hard-rubber tubing. Washers and nuts were fitted to the screws and the ends sawed off flush with the nuts. The reel end of the extension cord is attached to two soldering lugs, one under a nut on each ring.

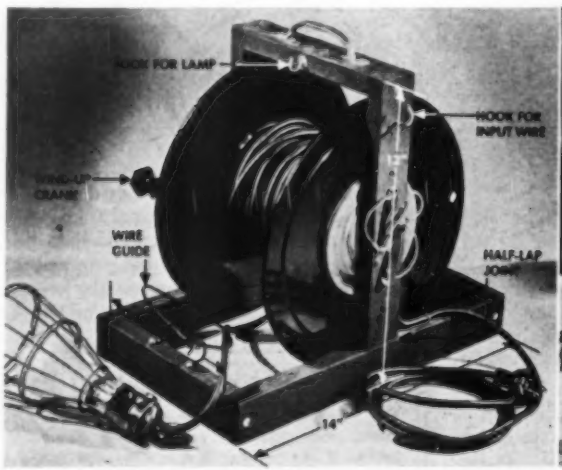

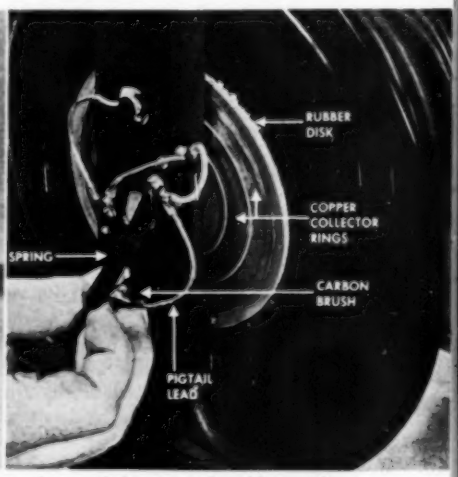

Protective cover is here removed to show collector-ring assembly. Springs that hold carbon brushes to rings were cut from old corset stay, while the insulating disks are soft-rubber sink stoppers. Note how 6′ input wire is stapled to frame to avoid any strain on electrical leads.

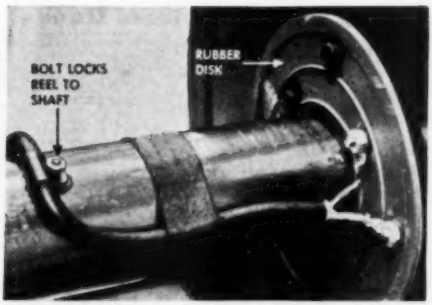

A through bolt anchors reel to central dowel, and a clip under nut also holds the cord end.

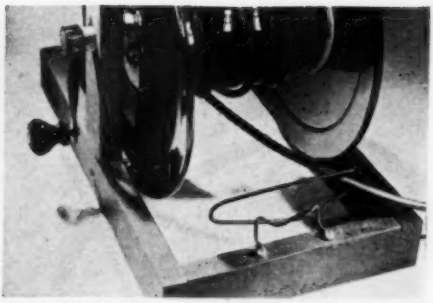

Guide bent from a heavy wire coat hanger aids in even rewinding of extension cord on reel.

A ¾" hole was cut in the outside rubber stopper to clear the axle. The inside stopper has a bigger hole to clear the reel core, and was slit so it could be fitted on without disassembling the reel. Remember that the nuts on the inside of the reel are "hot." Although there is no reason for handling this part of the reel, it might be wise to insulate them by covering with a third rubber stopper.

Leave the brass caps on the flashlight carbons so you can solder pigtail leads to them. Two ¾" holes were drilled through the vertical frame member to take the carbons. These holes are counterbored for the larger diameter of the brass caps. Two strips of spring steel from a corset stay (clock spring would do as well) hold the carbons firmly against the rings. Two small wood screws hold these springs to the frame. Soldering lugs under two of the screws serve as connections for the 6′ plug-in cord to the pigtail leads from the brushes.

The frame shown here, for a 6" by 10" reel, is made of ¾" by 1¾" white pine and assembled with flathead screws. A coffee can furnished material for the cover that protects the collector-ring assembly. It is held in place by two small screws into the vertical frame member.

Before final assembly, the frame was given two coats of flat black paint. A drawer handle was fastened to the top crosspiece, and large cup hooks were set to hold the coiled plug-in cord and the extension cord socket. The crank is a piece of strap iron, drilled for an anchoring screw to the axle. Rewinding the cord is helped by a guide bent from a wire coat hanger. Its width should be slightly less than that of the reel.

The cord used on the reel should be rubber- or plastic-covered and round in shape. Stranded No. 18 two-conductor cable will serve for general purposes. Any conventional socket may be used, but a wire-guarded socket with outlets on the sides is especially convenient. For extra-rough service, such a socket can be had jacketed in soft rubber. If you want to be really fancy, a fuse block and a pair of 5-amp. fuses may be installed on the input line.—*Gilbert Sonbergh, Hollywood, Calif.*

Guard on Dish Rack Stops Splashing on Floor

THE simple, two-piece gadget pictured at right will stop lots of splashing when dishes are rinsed. Make it of aluminum or other nonrusting sheet metal, forming a lock joint to connect the side and end. If necessary you can cut tabs to anchor them on the drainer. Thin waterproof plywood finished with enamel may also serve. No extra storage room is needed for the guard since the two flat pieces may be laid in the rack when not in use, or hooked on if the rack is hung up for storage.—*Robert Hoppough, Waukegan, Ill.*

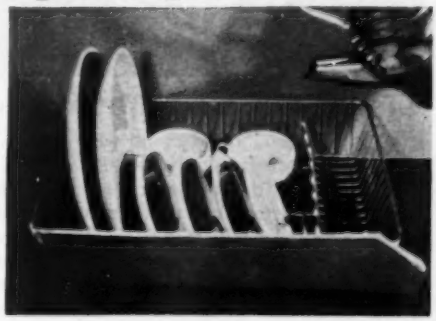

Roll Your Own Camp Table

CAMPING trips and picnics are more fun when you carry along portable furniture. The Cam-Pic® table, with benches to match, may be unrolled in a few minutes. No nails, screws, or bolts are needed. The table legs unfold like a cot. Slats, held by webbing and metal fasteners, fall into place as the top is unrolled. Wrap the top around the legs and you're ready to move. Packed in its carton, the table weighs 18 lb. and forms a package 3′ long. Gro-Sales, Inc., Los Angeles, is the maker.

Brush Guard Protects Hands

A RUBBER jar opener, the kind that can be bought for about 10 cents, makes an excellent protector for your hands when painting a ceiling or any other overhead parts of a structure. It will slip over the handle of the brush, catching drippings that otherwise would run onto your hands. Such jar openers have a ¼″ hole in the center. The hole may be enlarged so the rubber won't tear if the opener is forced over large-handled brushes.

Oil Stops Hand Chapping

IF YOU have to do an outdoor chore in cold weather—a job for which you can't wear gloves—castor oil will prevent chapped hands. Rub the oil well into your hands before starting work and again when finished. —*Paul H. Graham, Manchester, N. H.*

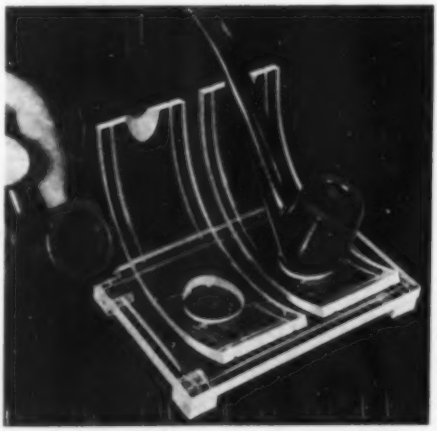

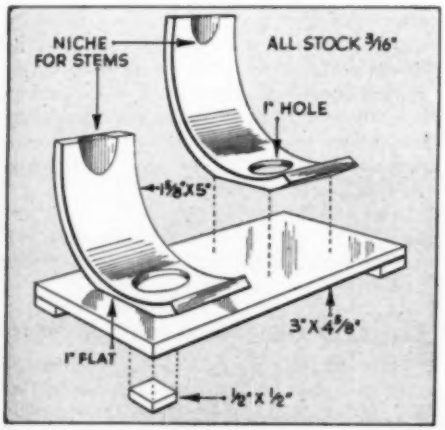

Clear Plastic Pipe Rack Is One-Evening Project

THIS modern, transparent pipe rack—a useful ornament for your desk—is made entirely of 3/16″ thermoplastic. Lay out the base first, and then cut the two pieces that are to hold the pipes. Before bending them, cut the niches, holes, and decorative grooves if desired. Center the holes about 1¼″ from each end. After heating the two pieces in the oven, bend them around a 4½″ tin can. When they are cold, grind or file a 1″ flat across the bottom of each to get a good cementing surface. Be sure the flattened areas are alike so the curved strips will line up when mounted. Cement ½″ by ½″ squares to the corners of the base as feet.—*Will Stoll, Elmhurst, Ill.*

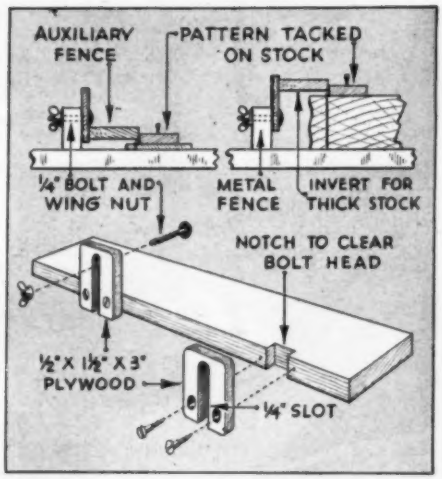

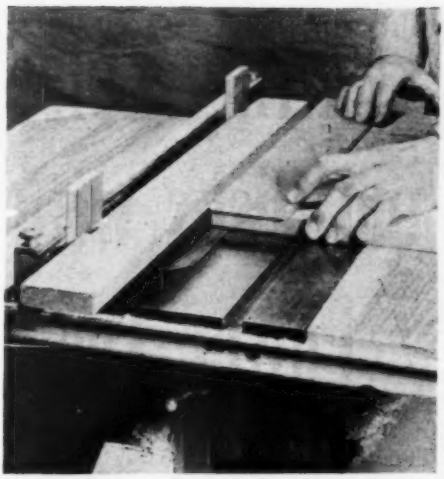

Circular Saw Has Movable Fence for Pattern Cuts

I HAVE found that the adjustable fence shown above simplifies duplicate pattern sawing on a circular saw. It can quickly be mounted or detached, and it will take stock from ¼" to 2¼"; just invert it for the thicker work.

Make the fence any convenient width and length, countersinking the woodscrews that hold the brackets to it. When you're ready to use it, set the outer edge, along which the pattern is slid, flush with the outside of the saw teeth. Then tack a thin pattern on the work to serve as a guide. Work of any shape with any number of straight sides can be cut by means of this technique—*Glenn A. Wagner, Delmar, N. Y.*

Cork Safeguards Fisherman's Key Ring

WHEN boating, fishing, or working around water, it's a good idea to take this simple precaution against losing your keys overboard. A large cork strung on the chain will keep two or three keys afloat if they should fall in the water.—*Ronald Eyrich, Milwaukee, Wis.*

Birds Feed from Salad Bowls

ALL the parts you need for this quickie project are two wooden salad bowls, a few feet of small chain, and seven screw eyes. The chain should be brass, copper, or some other nonrusting metal. Chain about the size of that used on the draft control of a furnace will be about right.

Space three screw eyes around a 1" circle in the inside center of the larger bowl. Then set three more screw eyes around the inside rim of the other bowl. Pry open the eyes enough to hook the ends of the chain in them, and then squeeze them shut. Cut the chain so there is about 4" between the rims of the bowls. Use a larger screw eye for the chain to hang the completed feeder.—*Arthur Trauffer, Council Bluffs, Ia.*

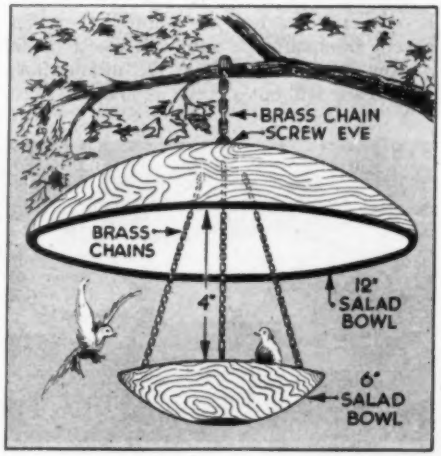

Cutting Holes and Disks with Power Tools

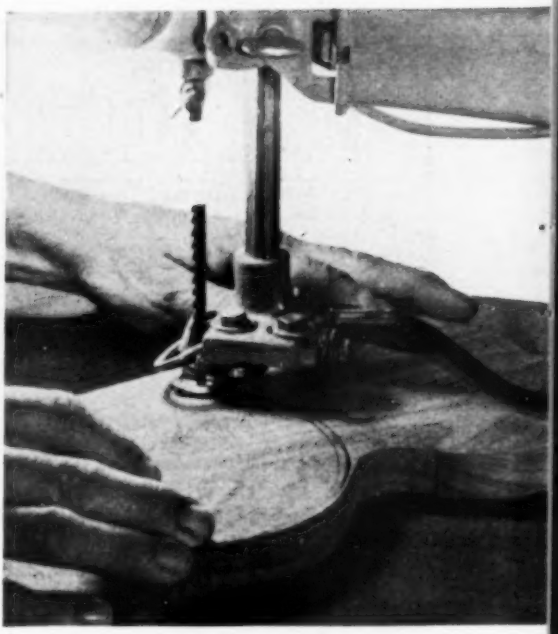

There's more than one way to swing a circle. Here's how to do it on the bandsaw, jigsaw, shaper, or lathe.

By Edwin M. Love

IT'S FARTHER around a disk than you think, as you often discover in cutting one with hand tools. Power tools are not only faster, but with jigs make precision a matter of course. Lazy Susans, lamp bases, and similar disk shapes are interesting chores for several power tools.

For anything but rough work, smooth the stock first almost to thickness. The slight excess can be taken off after cutting, along with any splinters that may be left. Scribe the circle with dividers.

The bandsaw is tops for fast disk cutting. If only one or a few are wanted, they can be cut freehand. Be sure you use a blade narrow enough to turn in the disk radius. A ⅛" blade will cut a curve as small as ¼"; a ¼" blade will go down to ¾" radius, while a ½" blade shouldn't be turned in much less than 1½" radius. There's no harm in using too narrow a blade, but it may cut slower and tend to wander more.

A circle is a line that changes direction at every point. So in sawing one the blade must constantly change direction, and you must feed in only by turning—never by pushing the work in straight. The secret of cutting disks free-hand is to keep turning the stock on an imaginary center that is fixed on the saw table. This pivot point lies on a line at right angles to the blade width, drawn from the tooth line.

Splintering of the underside is lessened by running a board into the blade until it's

1

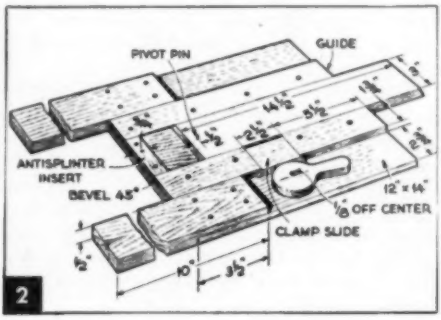

2

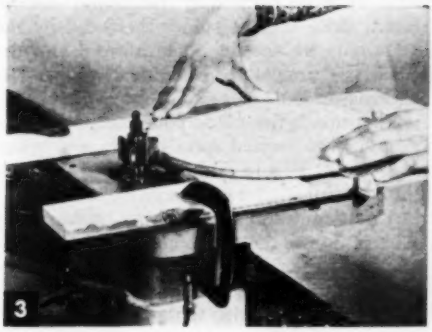

3

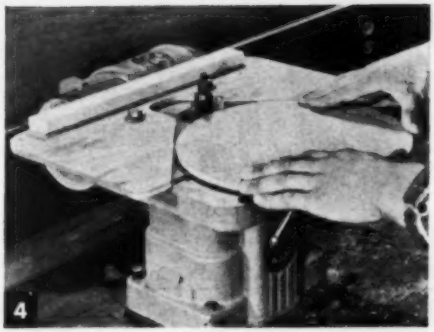

4

centered on the table, and clamping it there. The kerf gives support close to the teeth.

Exactly the same points apply to jigsawing disks. The jigsaw will equally well cut a smooth inside hole, where the disk is the waste. It's also ideal for tricky cutouts where disk and hole are to be refitted, as in making a loudspeaker panel and grille. Saber saws—wide, stiff blades that fit into the lower chuck only, as shown at the top of the facing page, do fairly fast work.



5

A pivot jig, shown in use on a bandsaw in Fig. 1 and detailed in Fig. 2, cuts duplicate disks fast. No layout is required; once it's set for size, disks are cut just by turning the stock against the blade. The jig is clamped to the bandsaw table close to the blade, with the pivot pin aligned as explained above. Lock the dovetail slide with the cam to hold the pin at the desired radius from the blade. Press the stock on the pin (making sure there will be wood all around the circle you're going to cut) with an edge touching the blade, and swing the piece into the teeth.

If your saw blade "leads"—tends to cut to one side rather than straight—the pivot point may have to be shifted a hair one way or the other. If the blade pulls inside the circle, move the jig a bit back; if the blade tracks outside, move it a trifle forward. Blade lead can often be corrected by adjusting the guides or resetting the teeth.

Figure 3 shows the jig used for finishing a disk edge on a shaper. Mount a straight cutter on the spindle, and clamp the jig to the table. With the machine running, push the slide forward to cut the desired radius, and lock the cam. It's a good idea to start the cut with the grain and, as usual, advance the work against cutter rotation.

With both a bandsaw and a shaper, you can rough-cut disks freehand on the saw and finish them quickly to size with the jig on the shaper. Of course you can also mold

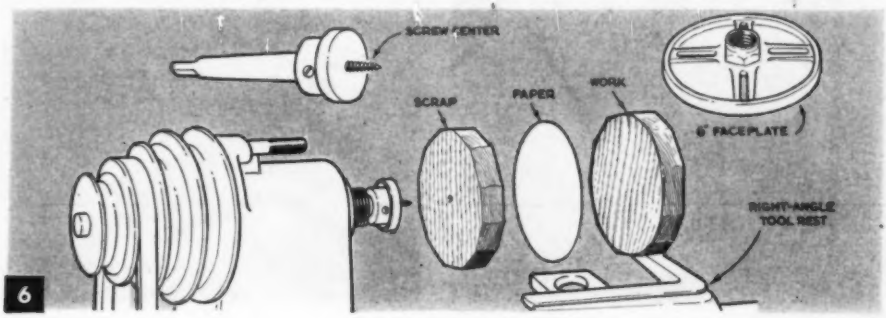

6

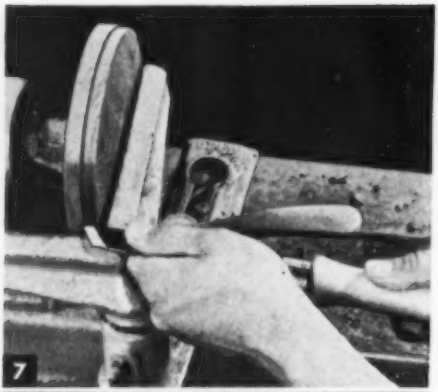

7



8

9

or rabbet the edge with a suitable cutter on the spindle.

On the drill press, the same jig can be used for shaping or, with a sanding drum, for edge sanding. Don't run the drum much above 2,000 r.p.m., or the work may be scorched and the abrasive paper glazed.

A simpler jig for sanding, shaping, or filing the edges of disks is shown in Fig. 4. It's just a 90-deg. V-notch cut in a board and enlarged at the throat to receive the cutter or sanding drum. Any size disk that will fit inside the notch can be worked. But the disk must be accurately cut round beforehand; since the jig guides the work by the edge, any inaccuracy is transferred and the device is useless for rough-cut disks. For this reason, too, cuts should be shallow. It's wise to mark the place you start; otherwise you may go around spiralwise in a decreasing circle. Figure 5 shows the jig used for jigsaw filing.

Circle cutters are fine for making toy wheels or wooden washers. Most require a center hole, or make one themselves. Use a slow drill-press speed and feed cautiously, with a backing board under the work so the cutter won't hit the table as it comes through. The fly-cutter type usually leaves a bevel on the waste, which is ragged at the breakthrough edge. Therefore if you want a disk, the bit should have an outside bevel, and if a clean hole, an inside bevel. If the stock is thick or you want to avoid edge splintering, go part way and turn over to finish.

Of course the lathe is a natural for making disks. Blanks up to 2″ in diameter can be affixed to a screw center; those up to 4″ can be mounted on a faceplate with one center screw (Fig. 6). Bigger work needs three or more mounting screws. Surface the faceplate side of the blank, and trim it roughly round. To avoid holes in the finished disk, you can glue the blank to a scrap backing block with paper between as shown, and split it off after turning.

Set the tool rest crosswise and just below center height. True the face from the center out with a gouge, finishing with a flat or skew chisel. Touch a pencil to the revolving work to mark the center, and measure from this with a rule to mark the size. On the

10

11

circle so drawn, run in the point of a skew chisel held flat on the rest (Fig. 7). To avoid splintering the back face, don't cut clear through. Reset the tool rest against the edge, and finish with a flat chisel from the edge. The photo shows a right-angle tool rest that is especially handy for faceplate turning. Sand with a flat backing block under the paper to avoid rounding the edge and corners.

When a lot of disks are wanted, a pad of blanks can be bradded together and mounted between centers for turning. Center holes, if required, can be drilled afterward with the V-jig centered on the drill press.

Small holes are, of course, a job for the drill press. Ordinary auger bits can be used if you cut off the square part of the shank and file the point threads off, preferably to a three-sided point. Left on, they may make the bit seize and yank the work out of control. Set the press for its lowest speed, and before starting, push the bit point into the wood (Fig. 10) to get it started right. Never run an auger bit fast; it may whip itself into a right-angle bend.

Wood bits resembling twist drills, but with spurs and threadless center points (Fig. 9) can be run at moderate speeds. Common twist drills will also serve, but may wander or make oval holes, especially in uneven grain.

Bits can be chucked in the lathe spindle, and the work held against a tailstock pad and fed by the tailstock handwheel. If work is already chucked for turning, or small enough to mount on the faceplate, the bit can be mounted in the tailstock and fed against the revolving work.

Very accurate holes (such as sockets for round tenons) can be bored to size as in Fig. 11. A narrow skew chisel is fed in on a guide line drawn on the face of the disk. Its advance must, of course, be truly parallel to the lathe ways if the hole is to have straight sides. The inside waste is turned away. This may be done faster with a gouge if the hole is large, the shoulder being bored square with a chisel afterward. Be careful not to run the tool into the faceplate or the mounting screws.

Large holes can be bored nearly through. The thin web remaining is easily knocked out after the work is detached from the faceplate, and the narrow flange trimmed flush by hand. When work is affixed to a backing block, the bore can of course be carried right through to the backing. END

Carved Crocodile Serves as Desk Letter Opener

THERE'S a smile, plus a few evenings of fun, for whittlers in this novel letter opener. The croc's tail is flattened and has sharp edges to slice envelopes open. The body is so shaped that it fits the hand nicely.

Select a straight-grained wood that will both carve well and remain strong in thin sections. Draw a grid of ½" squares on ¾" stock and lay out the pattern by following it on the squares at the right. Saw roughly to the shape of the top view. If you have a bandsaw, you can save time by tacking back the waste and sawing to the side profile also.

Carve the body, head, and legs to a well-rounded form, but make the tail quite thin. For the hide markings on the back, carve shallow grooves both lengthwise and crosswise.

Sand smooth without obscuring detail. Paint the top of the body brown, letting this shade into cream at the sides and using cream for the underbody. The inside of the mouth is red, with white teeth. For eyes paint white dots with tiny black pupils.—*Elma Waltner, Hurley, S. Dak.*

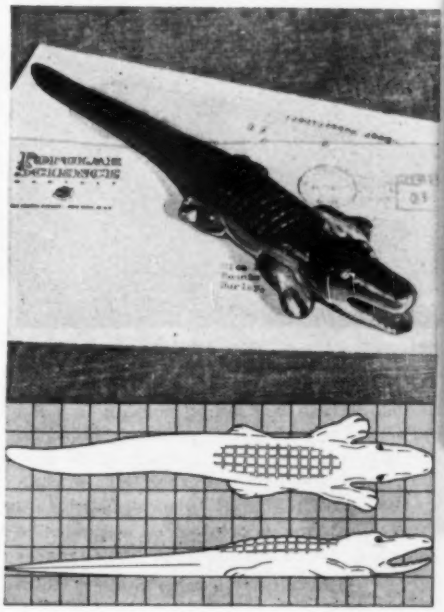

NEW TOOLS

Collet Chuck Features Safety

DESIGNED for use on lathes with a 1"-8 spindle thread, this new collet chuck has no projections to catch clothing or fingers or to damage tools. Work can be done from any angle and right up against the chuck without danger.

Fully balanced for accuracy at high speeds, the chuck has a work capacity ranging from ½" to 2". Taking any of three double-end collets, it can be tightened or loosened with a twist of the wrist. It's a product of Delta Manufacturing Division of Rockwell Manufacturing Co., Milwaukee, Wis. The chuck weighs 2½ lb.

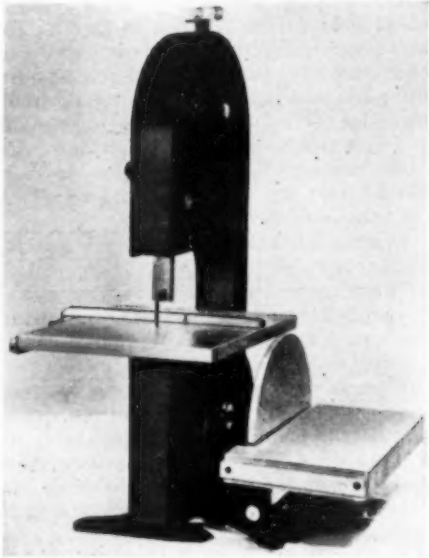

Bandsaw and Sander Combined

HERE are two popular power tools in one unit. The bandsaw handles stock up to 2½" thick, cutting to the center of a 14" circle. A 9" sanding disk is mounted on the end of the drive shaft. The sanding table is adjustable.

Manufactured by Radius Precision Tools, of St. Louis, Mo., the combination tool operates on either a ¼-hp. or 1/6-hp. motor. It uses a standard V-belt drive.

Handle Gets into Tight Spots

A BALL-AND-SOCKET universal in this new ratchet handle has spring tension to keep the socket in any desired position. For rigid use, it can be angled to as much as 90 deg. A thumb control shifts the ratchet. A knob on the end of the adjustable crossbar makes it easy to use the tool as a speed wrench. The Browning Tool Co., Bozeman, Mont., makes it in various sizes. Prices range from about $18 to $23.

Pliers Bend Sheet Metal

WIDE-NOSED pliers now being offered to sheet-metal craftsmen simplify the forming of channels and other kinds of bends, especially in smaller sheets.

Made by the Vise Brake Manufacturing Co., of Omaha, Neb., the pliers may be obtained with jaws either 2½" or 3" wide. One of the jaws is square along the front edge. The other is beveled to facilitate sharp bending beyond 90 deg.

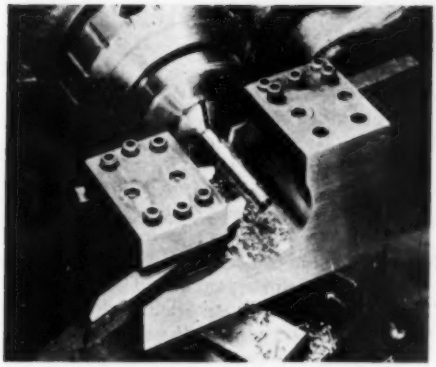

A cut-off tool is inverted in the rear slot. Rockers permit vertical adjustment of tools.

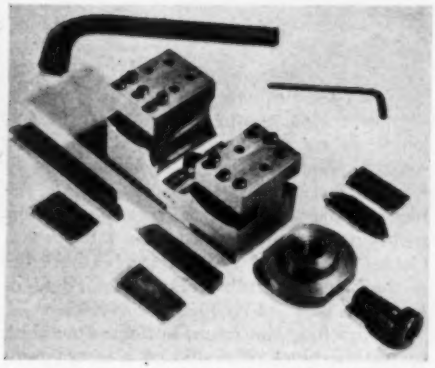

A turned nut and hollow-head bolt clamp the holder to the T-slot of the compound rest.

Three-Tool Holder Turns Small Parts Fast



WHEN you have to turn a lot of identical small parts, this box-type tool holder does a perfect job. It easily handles work up to ½" in diameter. Special screws and pins, duplicate parts for models, rivets, and small gear blanks are some of the possibilities. The sketch at left shows one setup.

Dimensions given below are suitable for a 9" or 10" lathe. Begin by squaring up a block of tool or cold-rolled steel to measure 1¾" wide and 3" long. Make the height equal to the distance from the compound-

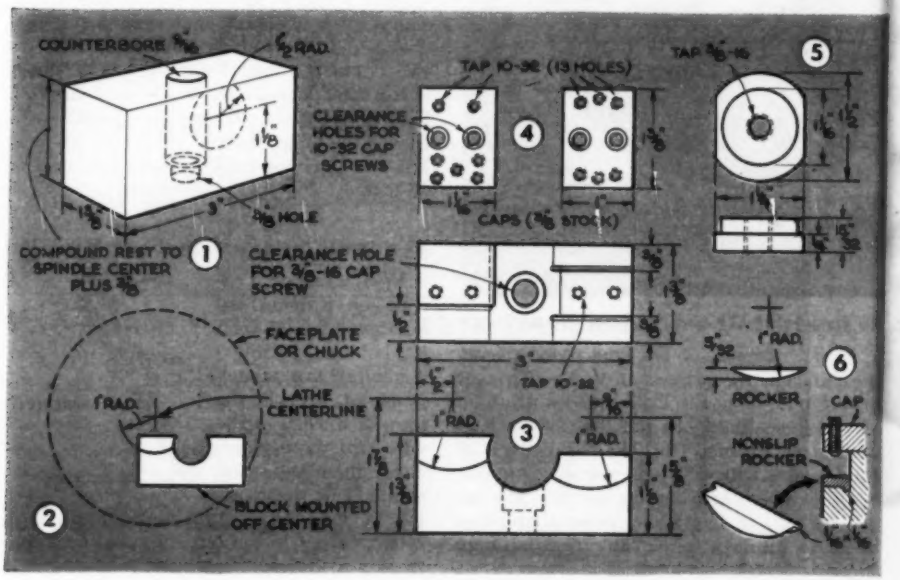

rest top to the centerline of the lathe spindle, plus about ⅜″ (Fig. 1).

Through the center, drill vertically a ⅜″ hole and counterbore it to within ¼″ of the bottom to clear the head of a ⅜″-16 hollow-head cap screw. Next turn a stepped nut to fit the tool-post slot (Fig. 5).

With this nut and a ⅜″ screw, clamp the block to the compound with the longest dimension at right angles to the lathe ways. Center a 3/16″ bit 1⅛″ from the bottom edge of the block and drill a pilot hole. Then enlarge this to 1″ (Fig. 1).

To machine the round-bottomed notches, mount the block off center on a faceplate or in an independent-jaw chuck (Fig. 2). For the rear one, locate it with the lathe centerline 1⅞″ from the bottom of the block and ½″ from the end; for the two front notches, 1⅝″ and 9/16″ (Fig. 3). Use the micrometer collar on the cross-slide screw to determine the 1″ radius.

Machine the rear recess ½″ wide, the front ones ⅜″. If you wish to use rockers that won't slip outward, make a 1/16″ by 1/16″ recess in each notch (Fig. 6). Reduce the rear height of the block to 1⅜″, the front to 1⅛″ (Fig. 3).

Drill and tap the block for the four 10-32 cap screws that retain the two caps (Fig. 4). In the caps, drill and tap the indicated number of holes for 10-32 setscrews ½″ long. Stagger these as shown so bits may be clamped at various angles. The two extra holes in the rear cap are handy for holding a coolant hose, adjustable stop, or lens.

For plain rockers, turn a blank of ½″ hardenable steel to 2″. Saw off a 5/32″ segment for the rear rocker. Then reduce the blank thickness to ⅜″ and saw off the front two. For rockers with a retaining lip, start with a 2⅜″ blank. The top surfaces may be serrated.—*Walter E. Burton and W. A. Conway, Akron, Ohio.*

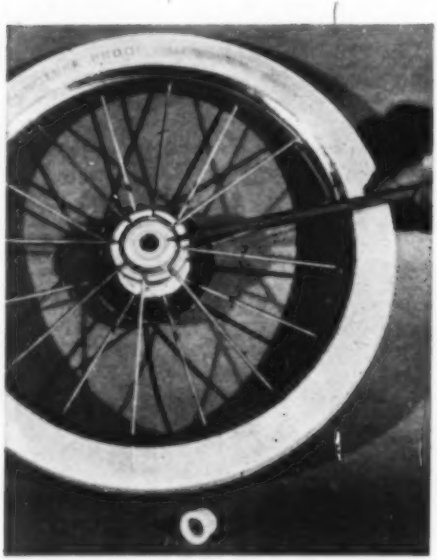

Wheels Roll on Nylon Bearings

BEARINGS made of Du Pont nylon plastic are used in the wheels of baby carriages manufactured by the Collier-Keyworth Co., of Gardner, Mass. In one test, a carriage wheel was turned for the equivalent of 1,190 miles. Bearing wear was negligible.

Other nylon bearing applications are being tested. It has been found that these need no lubricants for light loads at high speeds or moderate loads at low speeds.



Assorted Tubing in One Pack

HERE's a new item to fill out the craftsman's stock of handy materials—a package of assorted steel tubing ranging from ⅜″ to 1¼″ o.d. in ⅛″ steps. Each piece is 12″ long, but greater lengths are available if desired. Packaged by the Towers Corporation, of Cleveland, Ohio, the kits sell for $2.50 each. The tubing is low-carbon cold-rolled steel of 18-gauge.

Wrench Serves as File Handle



WHILE out on a recent job I found my file handle had been left behind. Spotting a T-handled tap wrench in my kit, I placed the tang of the file in the adjustable jaws, tightened them up, and slipped out the cross-bar. I've used this stunt many times since, often leaving in the bar for a better grip.—*Robert E. Rusch, St. Albans, N. Y.*

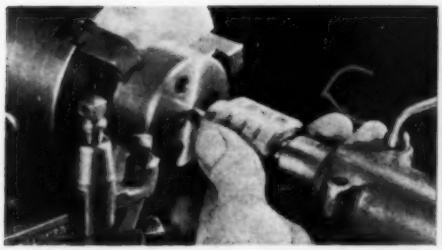

Simple Hand Chuck Stops Centerdrill Breakage

TIP breakage of centerdrills is less likely with this little hand-held chuck, because if the going gets tough, the chuck will simply turn between your fingers. It's a big time-saver too; the centerdrill can be kept in the chuck, which is merely slipped over the tailstock center whenever you wish to use it.

Turned from a short length of cold-rolled round stock, the blank is first chucked as at right above and turned and drilled. Reversed in the chuck, it is given tailstock support while it is knurled and grooved. Then the tailstock is backed off and the 60-deg. taper hole is bored by a series of light cuts with the compound set at the proper angle. Holes for the two hardened setscrews are drilled and tapped 90 deg. apart.—*C. W. Woodson, East Aurora, N. Y.*



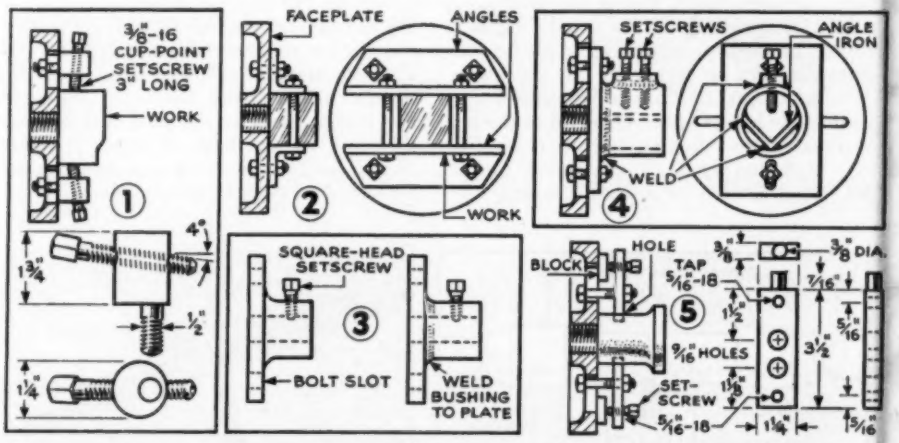

Faceplate Setups Substitute for Four-Jaw Chuck

IF YOU don't have a big four-jaw chuck, you can still handle good-sized castings and irregular pieces. The setscrew studs in Fig. 1, for instance, work nicely on a faceplate. Two steel angles will hold square or rectangular pieces (Fig. 2).

Figures 3 and 4 show devices useful in production runs. The first is used mainly with round stock of fixed size; the one in Fig. 4 takes different diameters. Both can be mounted off center for eccentric work. True up the faces that meet the faceplate with the fixtures mounted backward on a stub arbor.

With castings that permit drilling, the faceplate straps shown in Fig. 5 are good, since the work faces produced are certain to be parallel.—*J. A. Blaker, Auburn, Mass.*

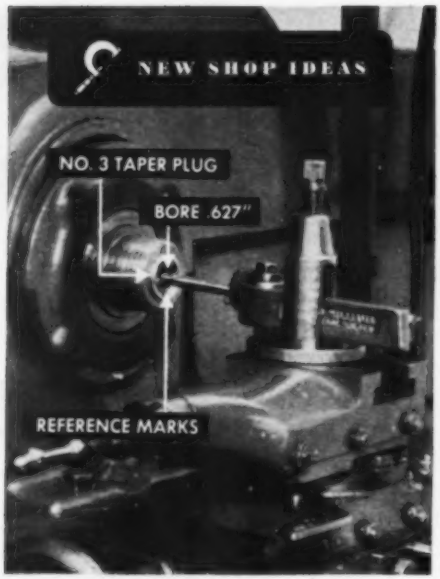

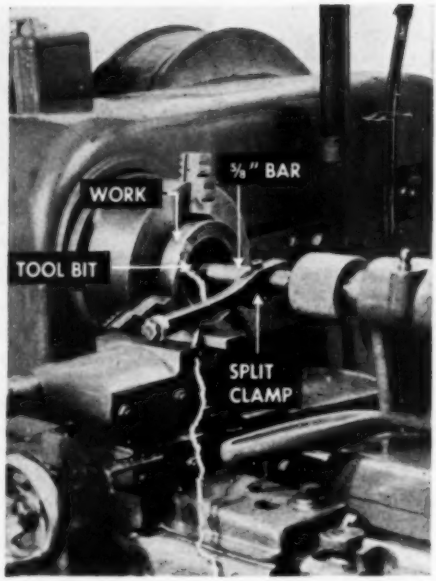

Bar Bores Big Holes. Firmly held at both ends, this stationary boring bar makes through holes of any size between ¾" and 3". On a 10" lathe I've taken ¾" at a pass. It works faster than a big drill.

A plug turned to fit the spindle taper is driven in, with punch marks to insure that it can always be reinserted the same way. It is bored out .627", as at left above, to a running fit for a ¾" bar. One end of the bar is rounded; the other has a center hole. Midway of the bar is a 3/16" square hole for the bit, which is held by a transverse setscrew.

One end of a flat bar is bored ¾", split, and fitted with a clamping screw. On the other end I've mounted a ball bearing to roll along the compound rest, as shown at right above. However, this can be dispensed with. In use, the bar and plug are suitably lubricated, and work is mounted with clearance behind. Thus the spindle and work turn (I use the slowest direct drive) while the stationary bar is supported by the plug and fed into the work by the tailstock ram. Tool bits should have correct boring angles.—*August Dobert, Nashville, Tenn.*

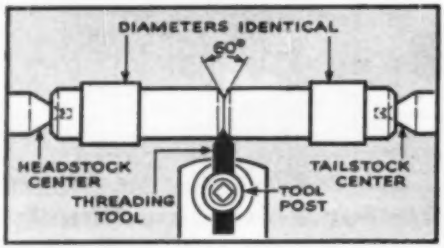

Setting Threading Tools. This lathe help makes quick work of setting a threading tool dead square or, with an indicator, aligning the tailstock. On a ¾" by 8" bar, turn identical diameters and form a 60-deg. groove by feeding in at 30. deg. from each side. Set thread tools in the groove.—*Theodore Kanakos, Bronx, N. Y.*

Tap Wrench Puts Twist On. Sometimes setscrews can't be reached by the short end of a hex wrench, and with the long end in the screw socket, there isn't enough tightening leverage. A tap wrench gives you the necessary length and also plenty of torque for tightening. Take care not to strip threads.—*J. M. Avery, Delhi, N. Y.*

Cutting Disks with Torch. True holes and disks are cut with an oxy-acetylene torch mounted on this guide. I've found it better than a chalk line or a solid pattern.

Cut extra-long threads on an 18" length of ¼" pipe. Saw and file out a pipe tee as shown, file the head of a bolt slightly concave to fit the torch tip, insert it in the pipe, and screw on the tee. Turning the pipe should clamp the torch tip fast.

File another tee to a sliding fit on the pipe. Thread a bit of ½" rod to fit it, cut to 1¼", turn a point, and file two wrench flats. Tightening on these locks the tee. Turn a knife-edged disk to a diameter that brings the edge even with the pivot point, and secure it with two collars so as to turn on the pipe.

The point should rest in a punch mark. Practice will show where to start the cut so as to swing without interfering with the hoses. – *Carl Tretin, Austin, Minn.*



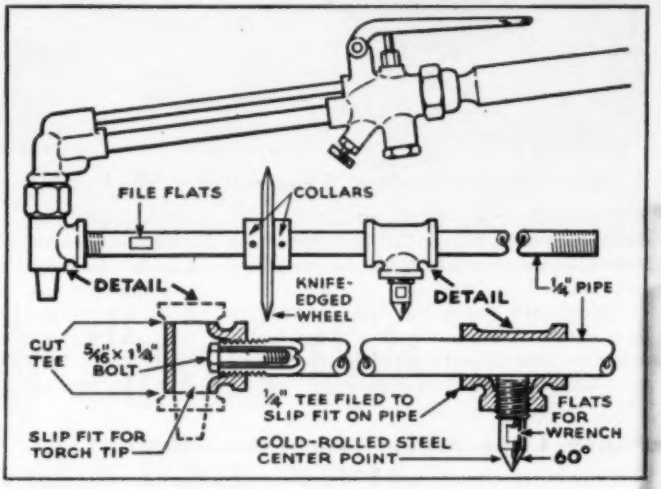

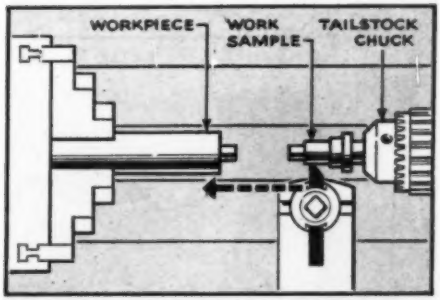

Sample Speeds Duplication. Having to duplicate a number of short turnings, I chucked the originals in the tailstock. Running the bit up against the different diameters gave me cross-feed settings within about .005", so I had only to run the carriage over to turn the work to the same diameters. On jobs that don't call for close tolerances, the method saves a lot of time and trouble.–*H. L. Pfister, Bronx, N. Y.*

Paste Holds Welding Work. Small parts are often hard to hold in place for welding. One way to secure them is to mix a stiff paste of powdered asbestos and water, and insert the pieces in position, leaving the portion to be welded exposed.

Square Finds Centers. Pocket-size and accurate, this center square is made of flat steel and drill rod. Lay out the tongue exactly midway between the studs and at 90 deg. to their centerline. Take care to turn truly concentric shoulders on the studs. As with other finders, intersection of lines about 90 deg. apart is the center.–*Federico Strasser, Santiago, Chile.*



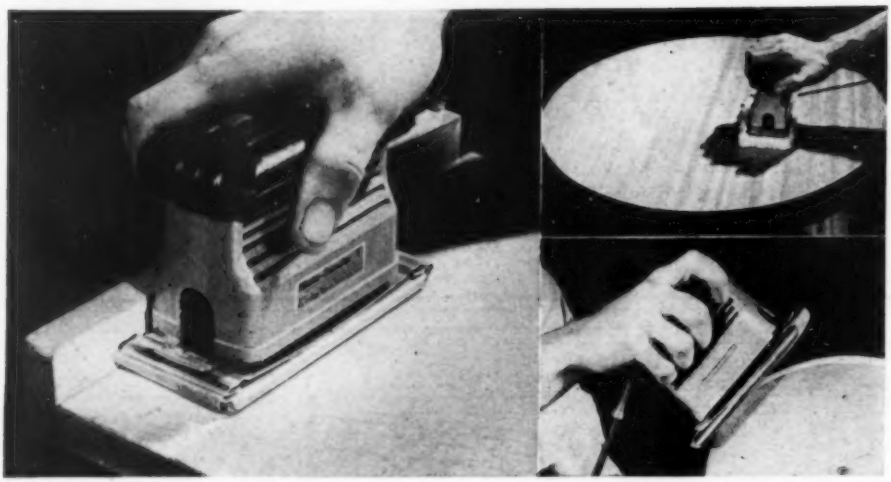

Vibrating Sander Also Does Waxing and Polishing

SHOP tests by PS editors of a new small electromagnetic sander reveal that such tools may find uses in both the workshop and home.

Though not suited for heavy cutting or large areas, they seem well adapted to the medium- and fine-grit work important to good finishing. The rectangular 2¼" by 5½" pad reaches close-in areas difficult to work with rotary sanders. The tool shown is light (2½ lb.) and quiet. It runs on AC only.

Sandpaper may be quickly replaced with a waxing pad or sheepskin polisher for polishing furniture or autos. The tool above is made by the Dremel Mfg. Co., Racine, Wis., and retails for around $15.

Paper Clips Make Test Connections

ELECTRICAL circuits under test or construction often call for temporary, quick-change connections. In much "breadboarded" work, the clip connector shown at right is handy. Numerous leads may run to one paper clip.



Dental Tool Is Good Seriber

OLD dental picks, sharpened on a fine emery wheel, make excellent metal scribers. Offset picks may be left bent for use in close quarters, or heated cherry red, forged straight, and hardened and tempered. Draw to a straw color to prevent breakage in use. In grinding picks, take care not to overheat and soften. Use corks on the ends. – *Carl Tretin, Austin, Minn.*

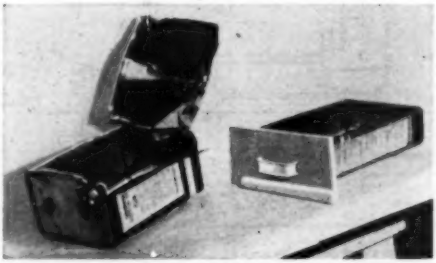

Old Oil Can Is Shop Drawer

EMPTY 10-qt. or 2-gal. rectangular oil cans may be cut down to form serviceable workbench drawers. Remove one side, cut each corner down to the desired drawer depth, and fold over the cut edges to form a safe edge all around.–*Gordon J. Skinner, Rochester, N. Y.*

Clear-cut images from 6′ to infinity are produced by these glasses with only simple lenses.

Telescopic Glasses Give You a Front-Row Seat

By Walter E. Burton

THESE magnifying glasses will give you close-up, detailed views of sports events and stage shows, but unlike binoculars, they needn't be hand held—you just wear them like ordinary spectacles.

They use inexpensive lenses, and can be made with just hand tools. Of course, a lathe would help in turning the rear lens

Laying out aluminum disks to replace original lenses in frame that supports telescope tubes.

Using a jeweler's saw to cut slots in disks so the telescope tubes may be adjusted laterally.

Double-purpose plastic ring acts as rear lens mount and base for fastening tubes to disks.

Small screws or pins anchor the tubes to the ¼" plastic rings, which are recessed for lenses.

mounts, but you can get along without it. The pair pictured here weigh 2¼ oz. and magnify 2½ diameters. To duplicate them, here's what you'll need:

Two positive, spectacle-type lenses of plus 92-mm. focal length and 31-mm. diameter; two negative lenses, minus 39-mm. focal length and 17-mm. diameter; a little .032" sheet aluminum; a small piece of ¼" plastic or fiber; aluminum tubing, 1¼" o.d. and 1 11/64" i.d.; tubing that slides snugly over it; 2-56 screws; a sturdy spectacle frame, separable at the bow hinges and with 1½" diameter lens openings; and dull-black optical lacquer. The latter is used to coat the inside of the tube, the holding rings, and the eye side of the two aluminum disks on which the tubes are mounted.

Briefly, construction of these glasses means making two identical Galilean telescopes and mounting them in the spectacle frame in place of the original lenses. You may use lenses of different focal lengths and diameters than those specified here, but in any case the negative lenses, as well as the positive lenses, must be identical. You can find the magnifying power of lens combinations by dividing the focal length of the positive lens by the focal length of the negative lens.

For the body tubes I used the 1¼" tubing, bought at a war-surplus store. I found that this tubing slid snugly but not tightly inside the lids of Ansco 35-mm. film cans. Also, the front lenses fit nicely inside the lids.

To get an idea of the overall length of the tubes, before cutting the body tubes to length, focus on an object 300′ away and again on a target 25′ distant. With the lenses I used, the body tube was cut 1⅝" long and the front tube 1". Other lens combinations will require different tube lengths.

If you use the lids, drill or punch an opening in the top, leaving enough metal to form a ring on which the lens can rest. If you use tubing, peen over the end to hold the lens, or cut a ⅛" wide ring from the 1¼" tubing and fasten it in the tube with small screws.

When the front lens is dropped into its tube, it should rest evenly against the turned-in end or against the ring. To hold the lens in place, insert after it a ring cut from the smaller tubing and sprung slightly out of round. A snap ring of springy wire also will hold the front lens in place. Use cement if additional security is needed.

From the ¼" plastic or fiber, cut a disk to fit in the rear of each body tube. Form the lens recess by boring a hole through the disk slightly smaller than the lens diameter. Then enlarge the hole for three-quarters of its depth to a diameter a little greater than the lens. Fasten the ring in the tube with two or three small screws. Hold the lens in the recess with cement or a snap ring.

With the lenses in place, slip the larger tube over the other and focus on a distant spot. Then mark the position of the focusing slot and its screw. This slot is a diagonal cut in the side of each front-lens tube as shown in the diagram. Cut it with a hacksaw and smooth the edges. Then set a small, fillister-head watch screw in the slot. Fasten

Smoothing slot in front lens tube. A fixed pin rides along the slot as a focusing mechanism.

Aluminum ring or snap ring of wire is used to hold front lens against turned-in end of tube.

the screw firmly in the tube so its head is at the forward end of the slot when the focus is on a distant object.

Next, lay the spectacle frame on the sheet aluminum and mark the lens openings. Cut the disks slightly oversize to allow for fitting in the grooves of the frame. Drill holes in the disks a little larger than the rear lens.

Directly above and below these holes, cut slots for the 2-56 mounting screws. Make the slots by drilling two holes 3/16" apart with a No. 43 twist drill and removing the intervening metal with a jeweler's saw. These slots permit adjustment of the tubes to suit the distance between the eyes of the wearer.

To focus the glasses, rotate the front-lens tubes. Focus individually for each eye. If the images do not register, bend or twist the spectacle frame slightly until you see a single, distinct object. A knurled ring around each front-lens tube will provide a better grip but adds to the weight unless the tube itself can be roughened.

If you want to increase the power of the glasses, use a rear lens of shorter focal length. A front lens of longer focus would do the same thing but that would mean using longer tubes. For example: if a minus 30-mm. lens were substituted for the minus 39 mm., the magnification would be about three times. To get a practical idea of the magnification, mount only one tube on the frame and look at a distant object. One eye sees it normally, the other magnified. END

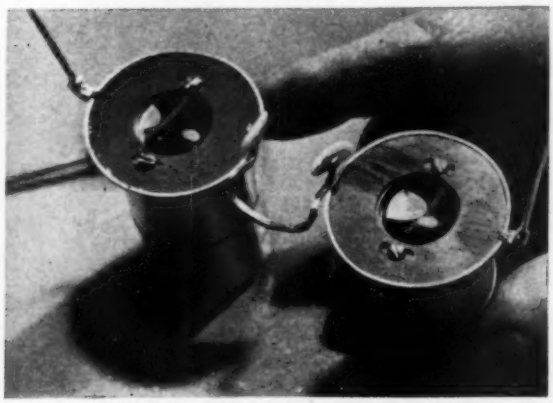

Eye end of instrument, showing screw-and-slot arrangement for adjusting the tube separation.

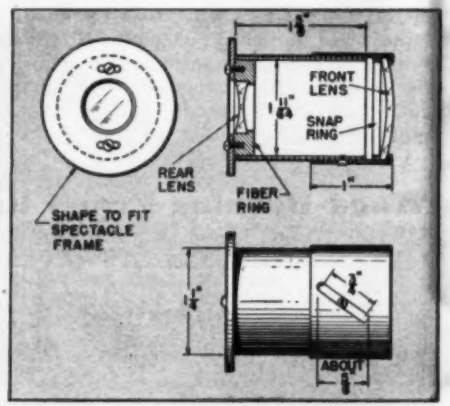

Dimensions here are for rear lens of minus 39-mm. focal length and front lens of plus 92 mm.

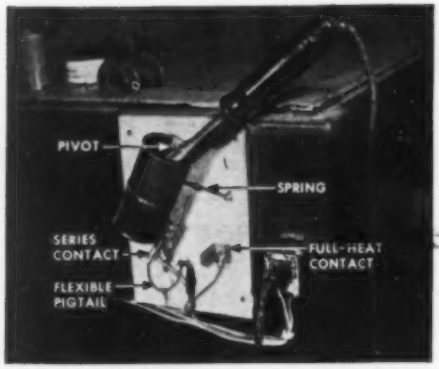

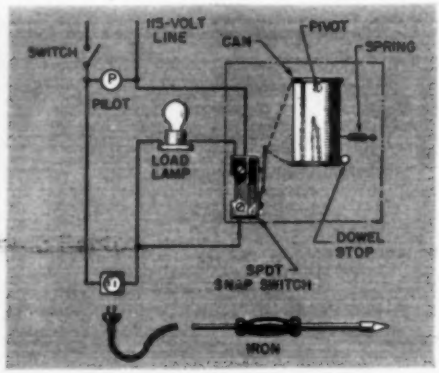

Bench Holder Controls Heat of Soldering Iron

THIS pivoted holder keeps a soldering iron at low temperature, yet automatically switches it to full line voltage when the iron is withdrawn for use. The idling temperature is low enough to prevent pitting of the tip but high enough to permit rapid warmup.

You can either build your own switch or use a SPDT snap-action switch. The center pole of the switch is connected to one side of the 115-volt line. The photo shows a homemade switch consisting of a vertical fiber arm extending below the bottom of a pivoted tin can. Attached to the arm is a bronze contact and a flexible pigtail lead. A brass stiffening plate is soldered to the outside of the can at the top and a pivot hole punched through can and plate. Two L-shaped brass contacts and a piece of light clock spring complete the setup. Try different lamps for various resistance values.

Lights Controlled Remotely

Two new remote-control light systems, both using low-voltage relays, now are on the market. Lite-Trol Ⓣ, at left, is made by Maring Manufacturing Co., Albia, Ia., for farm use. At right, a relay of the General Electric system—for homes, farms, and factories—is being installed. Both systems incorporate transformers to reduce the voltage and consequently use light-gauge wire, such as bell wire, from the push buttons to the relays.

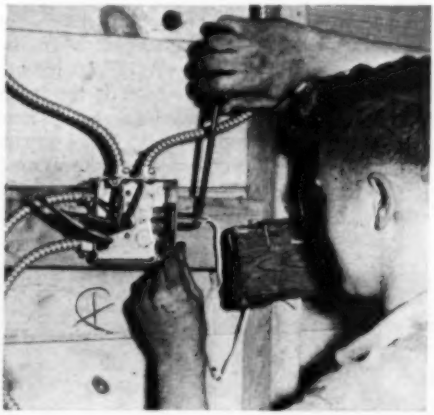

Wood-Burning Pencil Built in Porcelain Tube



MADE of inexpensive materials, this wood-burning pencil will operate in series with a 400-watt load or directly from a 6-volt storage battery. Twist together the leads and the resistance wire, and mold plaster of Paris around the head, leaving a small loop of wire as the point. The pencil I built has given good service for many hours.—*Stanley J. Drazek, College Park, Md.*



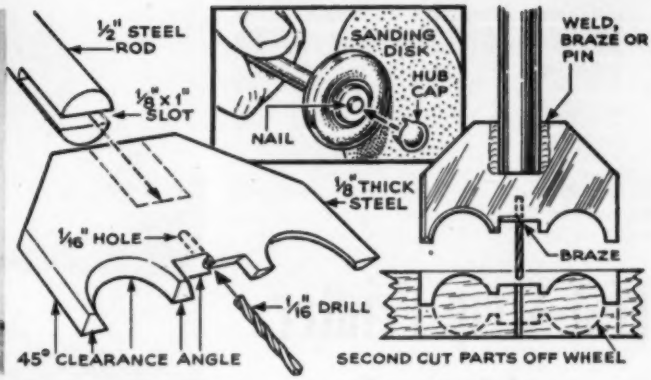

Revolving Blade Cuts Wheels for Small Toys

CHUCKED in a drill press, this revolving cutter solves the problem of making wheels for toys or models. Materials required are a piece of ½" steel rod, ⅛" steel plate 3" square, and a 1/16" twist drill.

File one edge of the plate to the desired profile of the wheel. The diameter of the wheel will depend of course on the distance between the outer edges of the two semicircular cuts in the plate. For clockwise rotation, file the left cutter to 45 deg. on the front edge, the right side to the same angle on the reverse, keeping them symmetrical.

The drill acts as a center pin. Braze or solder it in place. Hacksaw a ⅛" by 1" slot in the steel rod and weld, braze, or pin it to the blade. Operate the cutter at moderate speed. When you've cut halfway through, turn over the stock and complete the cut from the other side.

The wheels may be smoothed off by allowing them to rotate against a sanding disk. A furniture glider pressed in place makes a good hub cap.—*W. H. Greenfield, Reno, Nev.*

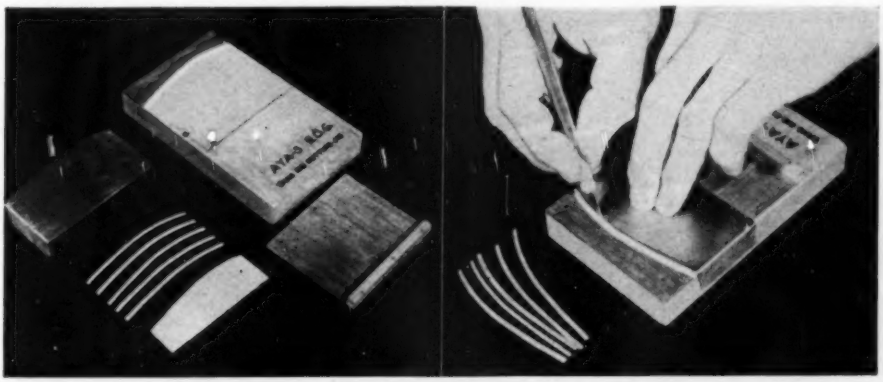

Jig Cuts Duplicate Wing Ribs for Model Planes

HERE'S a simple jig that will enable model-plane enthusiasts to cut duplicate wing ribs accurately. The jig consists of a maple base block, a sheet-metal cutting guide, and a cleated push strip. At one end of the base block is a stop strip, its edge having the same curve as the guide. The latter is secured over the base with brads, leaving a gap between guide and stop strip equal to the desired width of the ribs. The balsa stock goes under the guide.

A sheet of balsa is first cut to the length you want the ribs. One edge also is cut to the proper curve. This edge is then shoved under the guide pattern and against the stop strip. After each rib is cut and removed, the balsa is shoved forward with the push strip. —*Glenn A. Wagner, Delmar, N. Y.*

Six tests of the same section of the print are made on a 2 5/16" by 5" sheet of paper.

Test-Strip Printer Saves Photo Paper

ORDINARY exposure-test strips give you a series of different exposures of different sections of a negative. This ingenious little gadget does better: it provides a numbered series of exposures of the *same* section, permitting accurate comparisons.

Six test exposures are made on a 2 5/16" by 5" strip, giving you three different series from one 5" by 7" sheet. The paper is loaded in a sliding tray beneath a hinged cover, and the printer is operated by depressing a button on top. This releases a ratchet mechanism or escapement, allowing rubber bands to advance the paper carrier one notch for the next exposure.

The housing is cut from tin-can stock, bent to the dimensions shown, and soldered together. Hinge the lid that covers

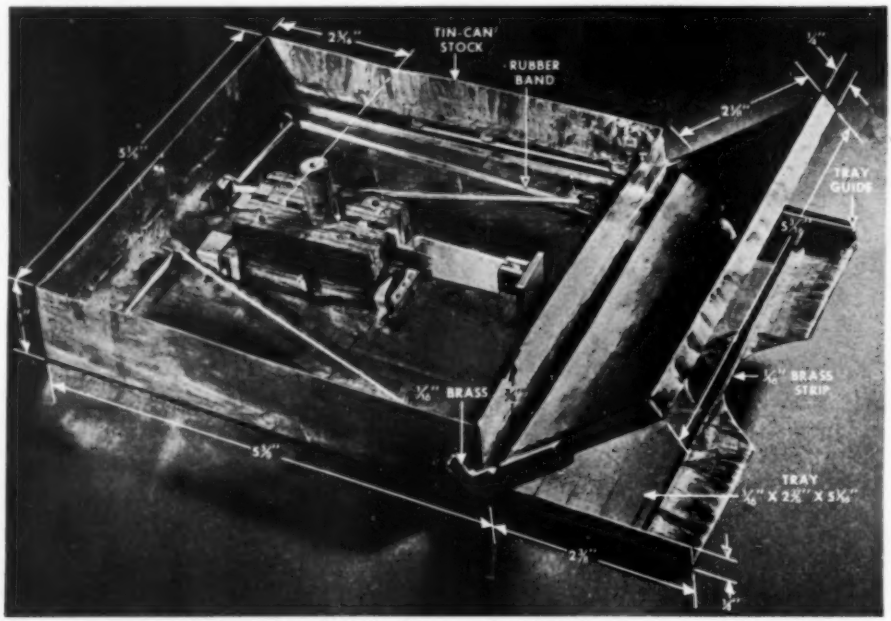

Exposures are made through a ¼" slot between the hinged tray cover and the wall of case.

the paper tray. A piece of wire soldered to each inner side of the case guides the tray.

Make the wood base for the ratchet mechanism in two parts, each ¼″ by 1″ by 1″. Cover these with tin on one face and one edge. The two 7/16″ by ½″ by 1¾″ wood members above this should be separated just enough so that the 1/16″ aluminum ratchet bar will slide easily between them. Drill the ½″ dowel hole after clamping cardboard 1/16″ thick between the wood parts; the dowel shouldn't be a sloppy fit.

When these parts have been assembled, deepen the 1/16″ slot between the two base members. This provides space for the 1/16″ by 1⅜″ wire—the ratchet pin—to engage the sawtooth notches in the bar. The two springs that lift it are cut from safety pins.

For proper operation of the mechanism, the pin in the dowel must be located exactly 1/16″ off center. When the button is depressed, this pin engages one of the slots in the upper edge of the bar, preventing the latter from running away. The 11/16″ dimension on the section view represents the depth of the dowel slot.

The ratchet bar is pivoted in a forked upright soldered to the edge of the paper tray. Make a tin cover with a hole for the button.—*Joseph F. Gréce, Bronx, N. Y.*

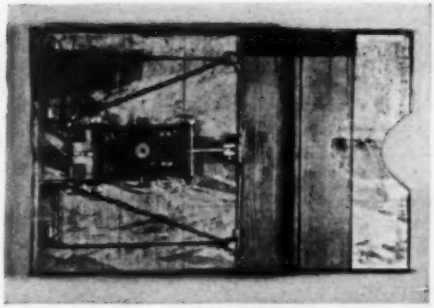

Figures inked on a clear film strip supported at end of tray automatically number exposures.

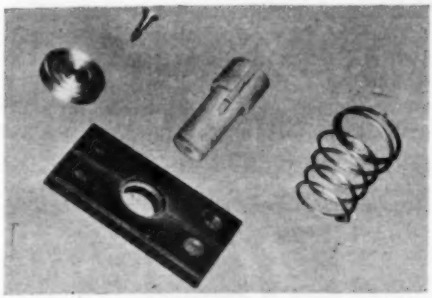

A cover, lower left above, goes on top of the ratchet-mechanism base shown in sketch below.

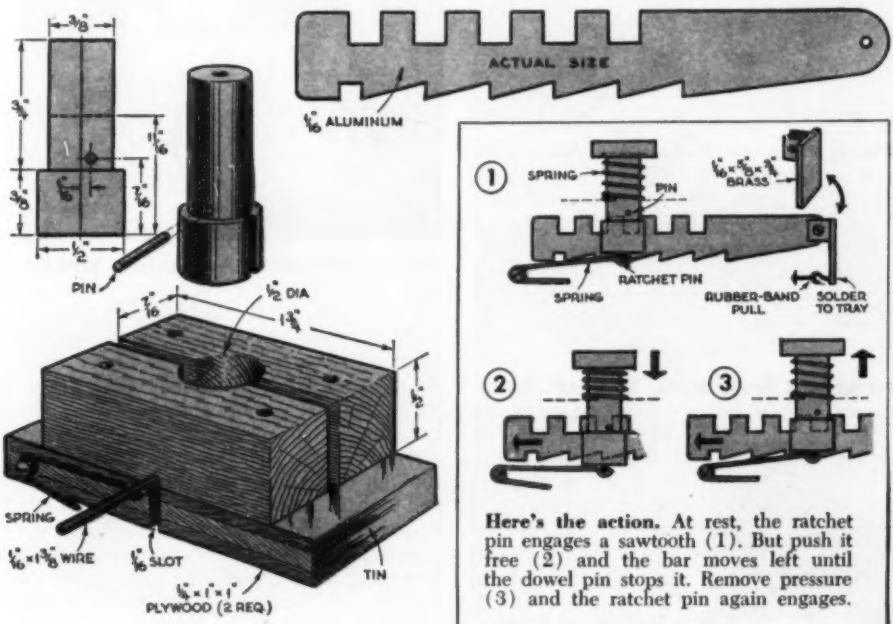

Here's the action. At rest, the ratchet pin engages a sawtooth (1). But push it free (2) and the bar moves left until the dowel pin stops it. Remove pressure (3) and the ratchet pin again engages.

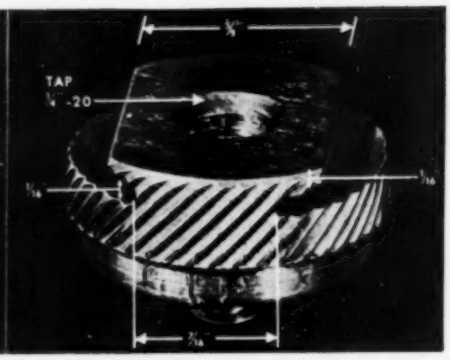

Adapter Holds Flash Gun. Flash guns with T-slot mountings may be attached to the tripod socket of almost any camera with this adapter, which is made from a standard aluminum tripod screw. Turn the screw tightly into the tripod socket and scribe a line on it in the direction the gun is to be mounted, to insure proper alignment. Remove it and hacksaw two vertical and two horizontal cuts, following the dimensions shown above. Finish the cuts with fine files or a hand grinder. Suitable variations for other flash guns may be suggested by this.—*Jack Wilson, San Pedro, Calif.*

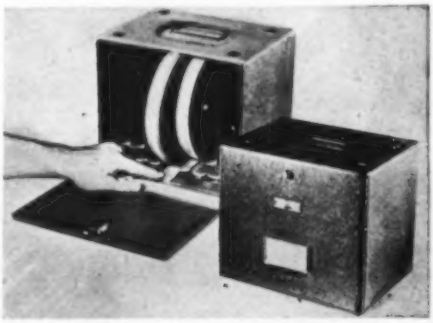

Push Button Selects Reel. These new reel cases for 8- and 16-mm. film have levers that retain reels in the opened case. If you push a lever down, the reel selected rolls out. Made by the Brumberger Co., Brooklyn, N. Y., the welded steel cases come in three sizes. The largest holds up to nine 16-mm. 400′ reels and sells for about $7.50.

Grater Circulates Water. An ordinary kitchen grater provides good water circulation in a pan of washing prints. Place the grater in the pan and run the water in at the top. One advantage of the setup is that the water can't harm film emulsion.—*J. A. Silver, Tracy, Minn.*

Three-Minute Negative Drier. This negative drier incorporates an electric fan and a ring heater taken from an electric stove. Capable of drying negatives in three minutes, it was built by Leo F. Long, assistant mechanical superintendent of the Toledo Blade, for that paper's photographers. The galvanized-iron case is 11½″ wide, 12″ deep, and 28″ long. Air is sucked into the case through two 10″ by 10″ Fiberglas® filters and blown across the heating element before it reaches the negatives. A thermostat mounted on top of the case controls heat. Screening is used in the lid and front of the box for air circulation. The dust-catching filters are changed about every two weeks.

Lamp Warms Solutions. Photo solutions that have dropped below recommended working temperatures can be warmed quickly and simply with an infrared heat lamp. Solutions heated in this manner tend to remain at correct temperatures longer because the rays warm both the liquid and tray. The lamp also is handy for speeding the drying of washed film and prints.—*Mike Clary, Seattle, Wash.*

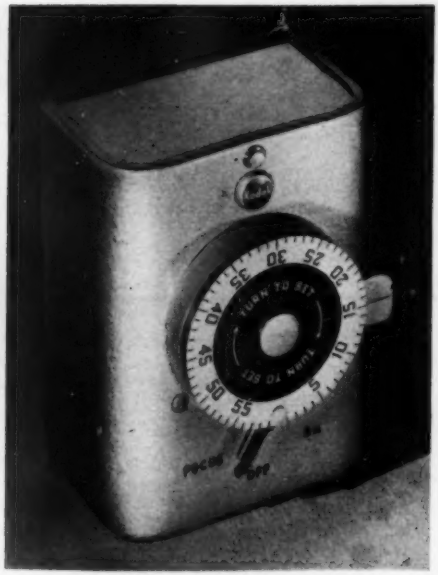

New Electric Timer. With a range of from one to 57 seconds, the Kodak Electric Time Control ⓣ provides for individual print timing, repeat timing, and light for focusing. A keyhole slot in the back permits hanging it on a wall or bench. Dimensions of the control are 2½″ by 3¼″ by 4⅜″. Its maximum electric load is 7 amp. on 110 volts AC. Priced at $15, it is available through Kodak dealers.

Holder for Copy Work. Here's a collapsible easel that's handy for horizontal copying. The upright piece, hinged to the 12″ by 18″ base, is braced by ⅜″ brass rod. An adjustable cleat, held by a ¼″ bolt through the base, anchors the rod to the base while the crosspiece is kept in position by a countersunk bolt and wing nut. Spring-type paper clips are used to hold copy on the crossarm. Mark cleat to show when upright is at 90 deg.—*C. A. Cole, Graham, Ala.*

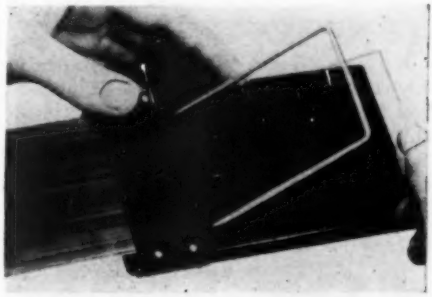

Holder Grips Film. A U-shaped wire, hinged inside this new film holder, is lowered to grip the edges of the film. Snubbers hold the wire securely in position. The holder eliminates sliding cut film into channels or a sheath; instead, film is just laid in place. Made by Burke and James, Inc., of Chicago, the all-metal double holder fits standard press cameras.

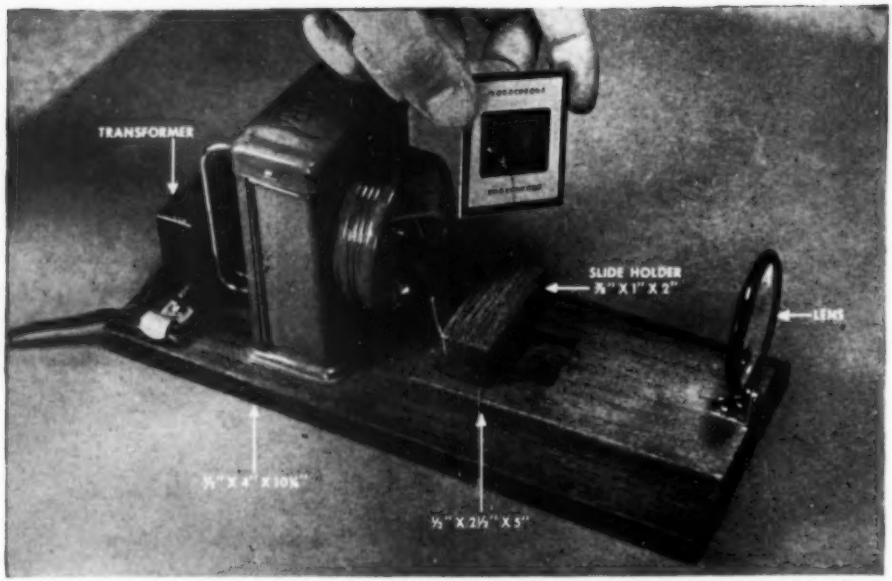

Transparencies are slipped into a slot cut in the holder. Make the slot about ⅜" deep.

Low-Cost Color Projector Built from Flashlight

AN EVENING'S work plus $4 will give you a 35-mm. projector that plugs in anywhere, doesn't heat up, and will enable you to see your color transparencies much enlarged.

Although it can't match a high-quality commercial projector, this simple one beats squinting through a viewer. It was built around a flashlight that sells for 70 or 80 cents. The lens is an inexpensive one of the type used by stamp collectors.

Slides are focused by moving the holder back and forth in a dovetail slot in the base. The magnifying lens remains in a fixed position. Center it at the front end of the baseboard.

When you're collecting the materials, a visit to a radio parts store is in order. There you should buy two items—a filament transformer and a brown-bead bulb with a miniature screw base rated at 6-8 volts. Be sure the filament is not too near the top of the bulb. Otherwise, you will have difficulty focusing it.

If you prefer, you can use a 6-volt bell transformer, but the filament transformer is more compact and gives the projector a neater appearance. The one I used, a Stancor P-6134, was rated 6.3 volts and 1.2 amp.

Take the flashlight apart and fasten the case to the wood base with screws. Mount the transformer directly behind. Drill the

back of the case for a grommet and feed through the two wires (usually coded black on filament transformers) from the secondary. Solder these to the points inside the case that originally served as the negative and positive contacts for the batteries.

Should the filament transformer have three leads on the secondary winding, tape up the centertap lead. This is usually identified by being a different color.

Solder the leads from the primary winding to the line cord and tape the joint. Anchor the line cord with a cable clamp.

In order to prevent flare from washing out the picture, I painted a black ring around the edge of the glass face of the flashlight. Before doing this, it'll probably be best to experiment with a ring cut from black paper.

When you're ready to use the projector, keep the screen fairly close—say 3′ to 6′ away. At 3½′ my lens gives a picture about 9″ by 13″. At 4½′ the image size goes up to about 12″ by 18″, amply large for a small group.—*Arthur C. Miller, Manhattan, N. Y.*

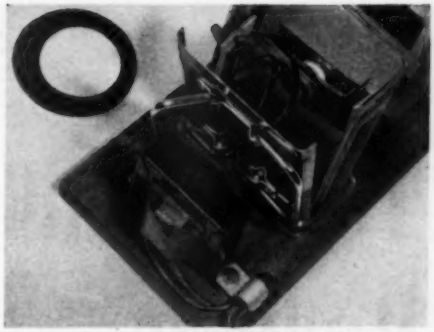

Solder the 6-volt leads to the battery contacts inside the case. A black ring painted on the flashlight lens cuts down light flare.

Remote Control Lets Subjects Snap Themselves

That's a real bomb-release plunger you see in Ray Jones's left hand. It's connected to the camera shutter via wire and a solenoid.

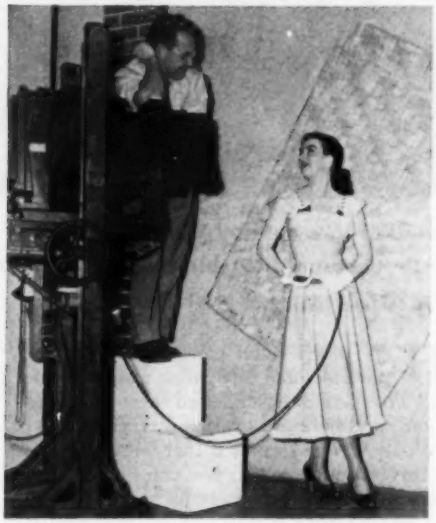

Holding the plunger, subjects take their own portraits. Jones, a Hollywood photographer, has found the device helps a subject relax.

If you don't care for the pictures others take of you, drop in on Ray Jones. Buying a bomb-release plunger, this enterprising Hollywood photographer hooked it up with a solenoid to the shutter release of his portrait camera. Current is supplied by a B battery.

When customers appear, Jones poses them, sets the shutter, and then turns over the plunger with instructions to shoot when their expressions suit themselves.

The camera shutter takes something of a beating, for the subjects keep clicking it. But Jones says he isn't worried about that as long as he gets the relaxed portraits he wants.—*F. Louis Friedman, Hollywood.*

Three-Pound Radio Is on the Ball

Housed in a cut-down file box, this little personal portable really drags in stations.

By Albert Rowley

HOW much radio can you stuff into a portable, and how small can you make it? POPULAR SCIENCE asked these two questions, and here are my answers. The first is "plenty." The second is that with standard, easily available parts, you can boil it down to a three-pound package 3½" by 5½" by 6".

Smaller sets can be made, but they'll probably offer less radio. Here's a honey of a compromise between size and performance. It gives you a four-tube superhet circuit, good loudspeaker volume, and enough sensitivity to pull in practically everything on the air. In tryouts the signal-grabbing qualities of this midget put several table-model radios to shame.

It's a natural to take along to the ball park—easier to carry than your best girl's handbag. Your favorite sports announcer can feed you the statistics on the game while you watch, and if leather-lunged fans around you get too noisy, all you have to do is plug in the earphone jack and listen in quiet and privacy. And don't worry about having to tote extra batteries to keep the set alive. This model went through two ball games on the same single-cell A supply.

Your first job is to assemble the parts, and that means careful shopping and selection. Chances are the spare-parts box won't be of much help in this case because you have to make sure, before using any part, that no smaller one is available. Be sure to specify ¼-watt fixed resistors, and get the smallest paper tubular condensers you can. They don't have to be rated higher than 200 volts as they won't have anything over 70 volts to cope with. Mica condensers don't have to be any larger than 7/16" by 11/16". You may find a volume control even smaller than

the one used here, as some new midget units have recently been announced.

The midget two-gang tuning condenser measures only 1¾" behind the panel; this one has a cut-plate section to tune the oscillator of the 1R5 converter tube. Should you be unable to find a midget condenser with an oscillator section, a small standard unit with two equal gangs can be used instead. In this case, however, a padder will have to be inserted in series with the ground lead of the oscillator coil.

The oscillator coil itself should have an adjustable iron core. This makes it easier to align the two sections of the variable condenser. Turn the core about three fourths of the way out of the coil; final adjustment can be made after the set is working.

Probably the most important components in terms of size are the intermediate-frequency transformers and the loudspeaker. Your best bet in both cases is to try to pick up replacement parts for commercial personal radios. Surplus permeability-tuned IF transformers also are available in the proper size, and some new IF's are to be had within the ¾" by ¾" by 2" dimensions of the ones I used. Slug-tuned IF's, incidentally, have the additional advantage of broad-tuning, which means that you can align the circuits easily without a signal generator. Those who have built superhets with ordinary IF transformers know what this can mean with limited equipment. Should you settle on surplus transformers, make sure that they are designed for the 456-kc. intermediate frequency.

Both the output transformer and the speaker are replacement parts for midget sets. The speaker is of an oval shape, and its cone measures only 1¾" by 2½". It's rated for 1 watt of output, which is ample for the set.

When you get through with your purchases at the radio store, drop into a stationery store and buy the cabinet. Just ask for an ordinary wooden file box of the extra-deep (6") type, made to hold 500 3" by 5" cards. Don't use a metal case if you hope to get reception with a loop antenna. The old cover is glued down and a new one sawed off near the back. Make another cut at the same time to reduce the over-all height of the box to 3⅝". A ¼" plywood shelf is glued and nailed in 1⅜" above the bottom to provide a base for the chassis and a compartment for the batteries. The top of the case becomes the front of the radio.

Make trial layouts of the chassis-mounted components before you drill all of the mounting holes. The chassis area is only 2¾" by 5".

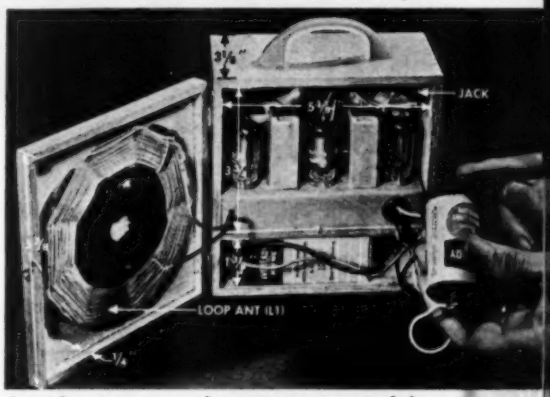

A grid cap snaps on the positive contact of the single A cell. Slid between cardboard tube and case, a split paper clip takes the other lead.

These photos show the chassis layout used; some of the parts can be shifted around to suit your own design, but for short leads try to maintain the relative positions shown. Cut a piece of sheet aluminum 4½" by 5" and bend a ⅞" leg along each of the shorter sides. The resulting chassis will measure 2¾" by 5". Since all the larger parts except the oscillator coil go on top of the chassis, this is the side to consider most carefully. Spread the parts out as shown in one photo, and mark the position of each one carefully. The two-gang tuning condenser, four miniature-tube sockets, two IF transformers, volume control and switch, output transformer, small PM speaker, and the plate by-pass condenser for the 1S4 go above the chassis; all except the by-pass condenser need separate house room on the small plate.

While you have to allow room for the volume control and switch, you won't be able to mount them on the chassis. For this you

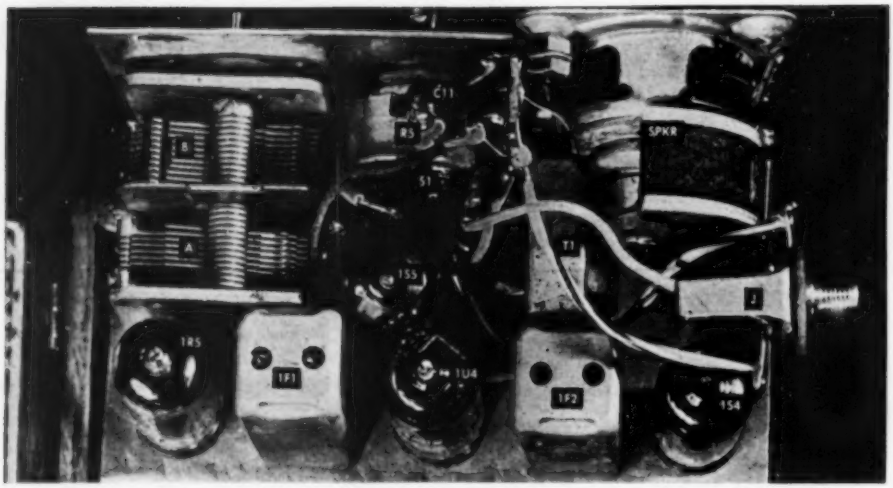

Compact but not overcrowded, the chassis top has little waste space. Note the midget output transformer next to the speaker, which is a miniature 2½" PM that has an oval-shaped cone.

need a front panel—a 3" aluminum square bolted to the chassis. Drill a hole through the same panel to clear the shaft of the tuning condenser.

Leave the wiring of the loop antenna and the batteries for the last. Begin with the connections to the 1R5 converter stage, then go on to the IF stage and the 1U4 RF pentode. Next make the connections to the diode of the 1S5 detector. Instead of follow-

PARTS LIST

All fixed resistors ¼ watt insulated carbon.
R1: 220,000 ohms.
R2: 10,000 ohms.
R3, R6: 3.3 meg.
R4: 82,000 ohms.
R5: 1-meg. volume control with DPST switch (S1).
R7: 10 meg.
R8: 1 meg.
R9: 2.2 meg.
R10: 200 ohms (This value is critical within 5%).
All paper condensers 200 volts.
C1 A, B: Midget two-gang tuning condenser with cut-plate oscillator section.
C2, C5, C8: .0001-mfd. mica.
C3, C4, C9: .01-mfd. paper.
C6: 8-mfd., 150-volt electrolytic.
C7, C10, C11: .005-mfd. paper.
L1: Loop antenna.
L2: Adjustable iron-core OSC. coil.
1F1, 1F2: Midget intermediate-frequency transformers, preferably permeability tuned.
S1: DPST switch on R5.
J: Normally closed phone jack.
PM speaker, 2½" oval cone; tubes, batteries (1 67½-volt B and 1 1½-volt A); four miniature-tube sockets; aluminum chassis and panel, misc. hardware.

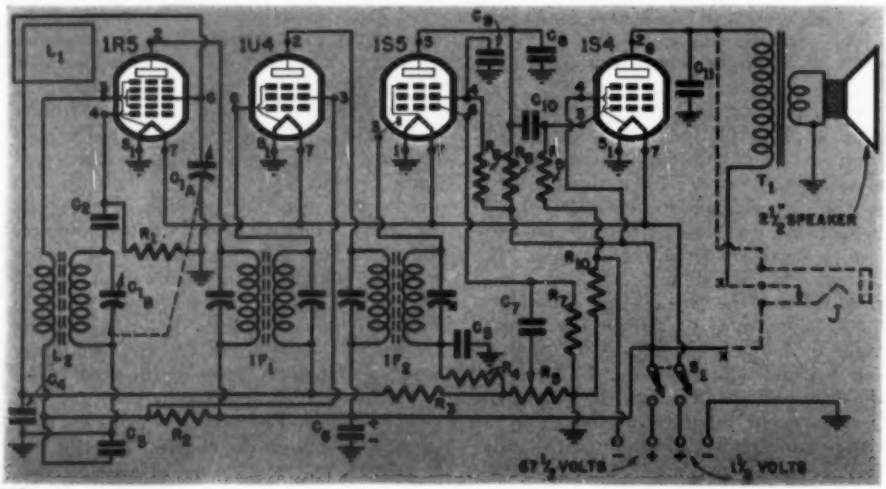

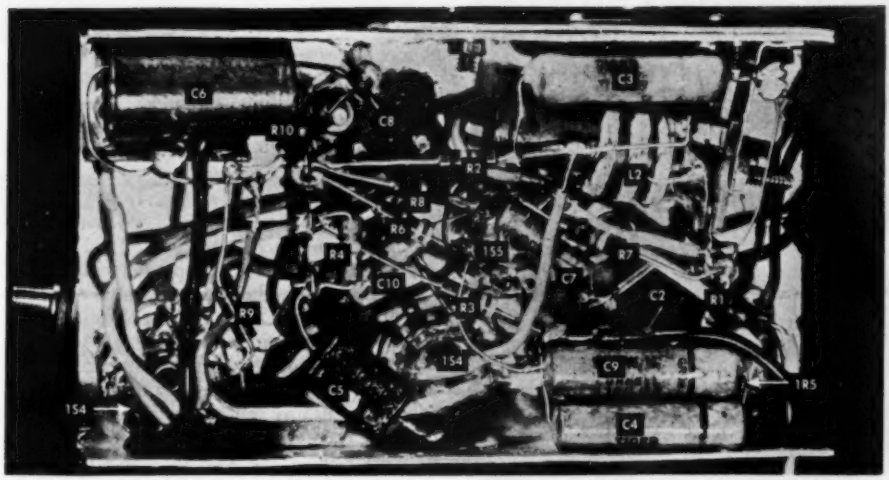

No rat's nest, the underside of the chassis is no tougher to wire than many larger sets. However, a planned wiring sequence will help to prevent you from getting badly in your own way.

ing the usual sequence right through, it may be better to stop at this point and commence wiring the speaker. Work backward from here to the pentode portion of the 1S5. The network of resistors and condensers that go to the grid, screen and plate of this tube and to the grid of the 1S4 output tube are the last of the small parts to be connected. This wiring sequence isn't essential, but it will help you find soldering room.

Headphones aren't necessary with this set but there are times when you will find them handy, so an optional phone jack is shown in the diagram. The jack to use is a normally closed unit that completes the loudspeaker circuit when the phones are not being used. Plugging in the phones automatically breaks the connection to the speaker.

For noisy spots, weak stations, or private listening, earphones are nice extra equipment. But if you should decide to pass them by, all you have to do is omit the portion shown by broken lines and connect the two wires marked "x" in the schematic drawing.

Drill a hole through the rear flange of the chassis and insert a rubber grommet. Through it you can bring four leads—preferably color coded—to the batteries. The coding is only to help you until the connections are made, since two of the leads are soldered to a standard, polarized clip that is used on 67½-volt batteries. The wire going to the positive (center) terminal of the flashlight cell is soldered to a grid-cap clip. For the negative connection a paper fastener is soldered to the lead and inserted between the metal shell of the battery and its cardboard sleeve. Cells of the sleeveless type will require a different connection.

When the chassis is completely wired, connect the batteries and loop antenna and tune the circuits for maximum volume and sensitivity. Start with the secondary of 1F2, and work back to the primary of 1F1. Bring in a station at the high end of the dial (with the tuning-condenser plates out of mesh) and adjust the trimmers on the side of the variable condenser. Take care of the oscillator trimmer first.

You'll find that you can strengthen weak stations a little by opening the back cover and allowing the antenna to swing about two or three inches away from the metal chassis. END

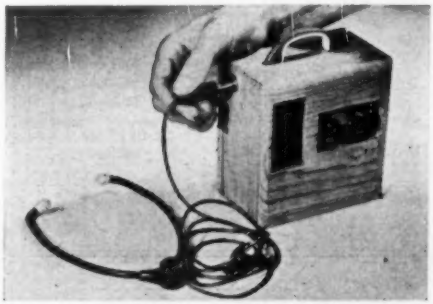

Plugging in the phones automatically cuts off the speaker. Phones are good in noisy locations.

Recharger Peps Up Flashlight Cells

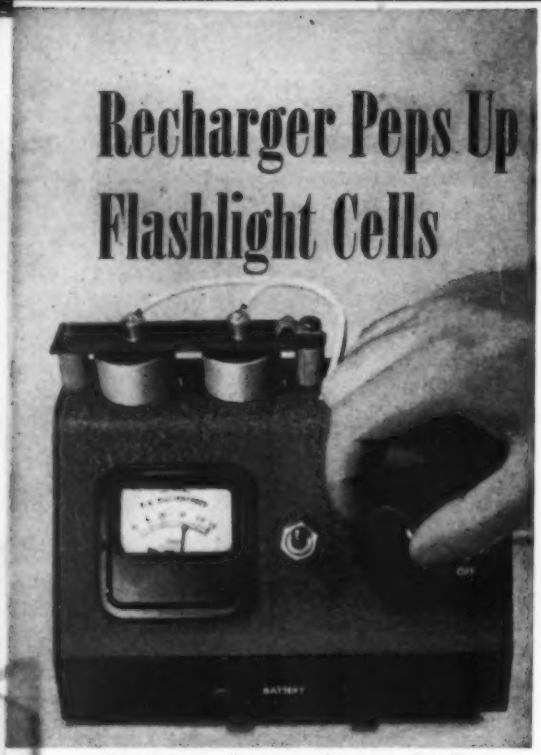

New life can be pumped into weak cells an average of fifteen times before they are worn out.

CAN you really recharge dry cells? And does it pay? The answers are, respectively, an emphatic yes and a temperate maybe.

To take the second point first, it would plainly not be sensible to lay out the $9 or $10 for the parts of this charger if you only use a handful of 10-cent cells a year. But if your home keeps three or four flashlights in use, or if your portable radio or bike lights show a hungry appetite for dry cells, this charger may indeed be worth while. Heavy users of batteries—press photographers, theater managers, repairmen, persons using hearing aids—may find that a charger can pay for itself fast.

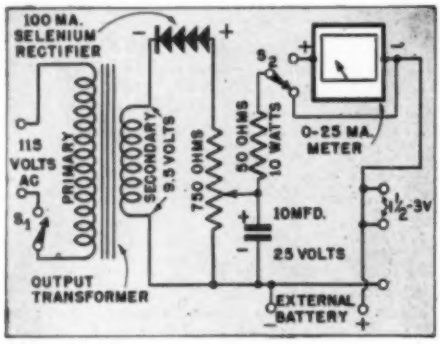

In figuring the economics of it, don't be put off by the cost figure quoted. The device shown was built entirely from store-bought parts, and assembled with an eye to looks. If you have a fair-sized scrap box, and if you can dispense with a slope-front cabinet, you can probably halve the cost at least.

The charger pictured works off a 115-volt AC line and handles any size dry cell, flashlight cell, and radio A or C battery up to 6 volts. It is *not* designed for multiple-cell B batteries of comparatively high voltage.

For a transformer I used a standard universal output transformer (a Stancor A-3852). It's considerably cheaper than a 10-volt filament transformer and serves just as well, delivering 9.5 volts between the Nos. 3 and 4 lugs on the secondary or voice-coil winding. The primary is centertapped, and the input is between either lead and the centertap, the other lead being cut back and taped.

Many other transformers will do, of course, but don't try to use one of the smaller doorbell types. The chances are that the voltage after rectification will be insufficient.

The rest of the components are also commonplace. A small 100-ma. selenium rectifier of the kind found in many new AC-DC radios is used, and costs less than a dollar. With 9.5 volts input, the rectified output is about 6 volts without load.

Adjustment of the charging rate, which must be varied according to the size of the cell, is accomplished through the 750-ohm wire-wound potentiometer. A cheap milliammeter, costing about $1.50, can be considered a must to allow this adjustment. Less essential but still highly convenient is a low-reading DC voltmeter to measure cells before and after charging.

Assemble the circuit in any convenient chassis, cabinet, or box, being careful to follow polarity of the leads. In the charger shown I punched two large holes in the top and rigged up a mounting to take two D-size cells at once, using a pair of grid caps as clips for the positive leads. A set of jacks and plugs permits running wires to other dry cells to be charged.

Considerable experimenting with recharging dry cells stands back of the following rules: Don't try to recharge cells with bulged or corroded cases. Don't try to recharge any that have been out of use for a year or more. Don't try to recharge cells that have

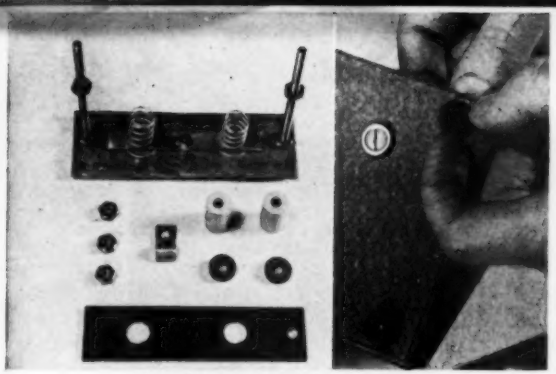

Stiff fiber strips, left, are spaced out on two long 8-32 screws to hold D-size cells that are charged. Right, cushioned feet hold the cabinet.

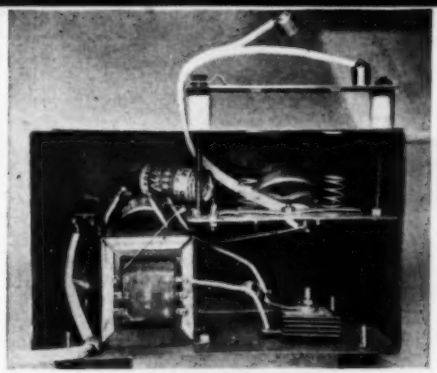

Rear view shows simplicity of construction. An inexpensive output transformer supplies power to the small selenium rectifier shown at right.

dropped below about two thirds of their original voltage. Don't put a recharged cell into immediate use, but let it rest for a day first to lose any temporary overvoltage.

Unlike storage batteries, dry cells seem to have a more or less fixed charging time—around 22 hours. After approximately this period on charge the current flow goes up sharply and the cell should be removed. Here is the preferred charging rate for different cells:

SIZE OF CELL	CURRENT IN MA.
No. 6 dry cell	15–25
D cell	10–15
C cell	7–15
AA cell (penlite)	5–10

One rule to keep in mind is to hold the current down so that the cells never feel warm to the touch.

You'll find a considerable variation from cell to cell. Some will come up nicely; others of the same make, age, and previous condition of servitude will be reluctant performers. Occasionally one will respond poorly the first few times it's charged but will later behave better, taking repeated charges. A cell in good condition can generally be recharged fifteen times or more.

If you're interested in theory, it has been found experimentally that discharged cells contain manganese oxide in the depolarizer. Since this substance is originally manganese dioxide, it seems likely that one result of discharging is to convert this dioxide into monoxide. The process is reversible; recharging seems to convert it back to dioxide, thus revitalizing the cell.—*Arthur C. Miller, Manhattan, N. Y.*

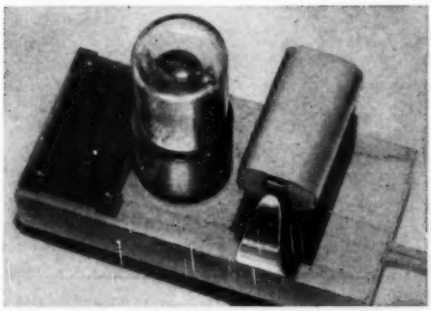

Hearing-Aid B's Recharged

USERS of this device for recharging hearing-aid B batteries charge one battery while using the other. Each morning the batteries are exchanged. Made by the Shelby Instrument Co., of Long Beach, Calif., the charger retails for $10. The maker claims it gives up to 75 percent longer battery life, and uses about 5 cents worth of electricity a month.

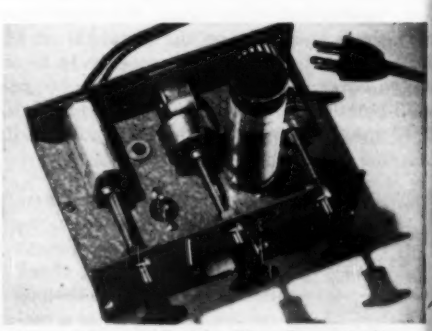

Hearing-Aid A's Recharged

ABLE to handle any type of A batteries used in hearing aids, this charger is said to cut A battery costs from $5 to 50 cents a month. Made by Mecon Products, Inc., of Los Angeles, and selling for $12.95, it draws about 3 cents worth of current a month. Given proper care, each battery can be charged 10 times or more, the maker asserts.

NEWS IN ELECTRONICS

Pre-Amp Boosts TV Pickup. Television-set owners who are receiving poor video signals due either to location or set characteristics may benefit from the use of a wide-band pre-amplifier. The model above uses two 6AK5 tubes and has a selenium rectifier. In some areas it may eliminate the need for an outdoor antenna. Vision Research Laboratories, Richmond Hill, N. Y., makes the booster. It sells for about $27.

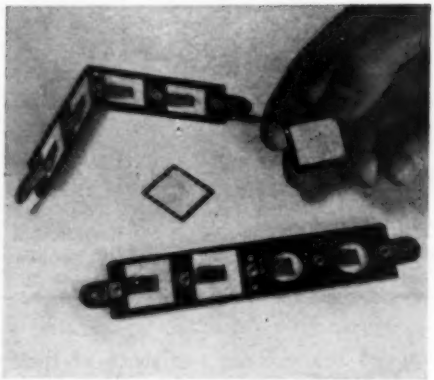

Strip Rectifiers Save Space. Selenium rectifiers are now being manufactured in wafer-thin strips consisting of four rectifying elements. They can be mounted on the wall of a chassis or bent around corners. Strip construction is said to speed heat dissipation, making for cooler operation, and the reduced number of elements (four instead of the usual five or six) cuts voltage drop across the rectifier. Where higher outputs are needed, the half-wave units can be combined in conventional full-wave and voltage-doubler circuits.

Resistors Show Up in Plastic. A kit of 40 assorted carbon resistors is marketed by Continental Carbon Inc., Cleveland, in a clear plastic box. The transparent case helps the experimenter or serviceman keep tabs on the sizes still on hand and also makes any particular item easy to locate. The hinged-cover boxes can, of course, be reused as small-parts containers. Various values from 100 ohms to 10 meg. are included in the standard kits.

Sound-Level Meter. A pocket-size noise meter enables engineers and technicians to check locations and installations where noise level is a factor. Said to be as accurate as meters weighing 20 to 30 times as much, this miniature, 2-lb. device should help in the placement of microphones and loudspeakers for public-address systems, intercoms, and the like. Sounds picked up by the microphone in the head of the instrument are converted into readings on a decibel meter at the base. Hermon Hosmer Scott, Inc., Cambridge, Mass., is the maker.



Rayon Bike Tire Announced

A NEW white-sidewall bicycle tire, using rayon instead of conventional fabrics, is announced by the Firestone Tire and Rubber Co., Akron, Ohio. According to Firestone engineers, tests show it has twice the usual strength to resist impacts and bruises, and that rayon doubles the mileage life of the tire.

Wood Finish Comes in Kit Form

WOOD-FINISHING kits, containing all necessary materials and step-by-step instructions, are offered to craftsmen by Gaston Finishes, Bloomington, Ind. Each kit includes stain, filler, sealer, and lacquer, varnish, or enamel in various colors. Also included is a wood panel showing each operation from the raw wood to the rubbed finish. Printed instructions correspond to the steps on the panel. Each package contains the proper grade of sandpaper and steel wool.

Photo Meter Checks Circuits

PHOTO-ELECTRIC exposure meters may be used to make rough comparison tests of electrical circuits. In the above photo, the meter is being used to check the relative resistance in the windings of a fan motor. The winding is connected to a 115-volt outlet through a 60-watt lamp. A light-colored card reflects light from the lamp to the meter. With the motor coils shorted out, the distance between the lamp and reflector is adjusted until the meter hand reaches the center of the scale. Then the coils are cut into the circuit one at a time and the position of the meter hand noted. By comparing the various readings, an idea of the motor coil resistances can be obtained. A shorted winding will produce a reading near that of the lamp at full brilliancy. The meter should not be moved between readings.—*Walter E. Burton, Akron, Ohio.*

Quarter-Round Conceals Wires



AS SHOWN in the sketch at left, low-voltage bell wires may be concealed behind quarter-round molding. The back of the molding must be chamfered to make room for the wires. Then the molding is nailed or even glued in place. At corners, the molding can be mitered.

New Chain Saw Is Fast Cutter

LIGHTNESS and power are combined in this new Disston chain saw, which is designed specifically for one-man operation. Weighing only 37 lb. dry, it has a 3½-hp. engine and a blade that extends 18″.

Intended for use in felling, bucking, and limbing, the saw operates equally well right side up, on its side, inverted, and on end. The one-cylinder, two-cycle engine has a clutch, muffler, air cleaner, and sealed magneto system. Starting is by means of a self-rewinding, permanently attached cable.

As shown below, engine controls are centralized for safety around a pistol-grip handle. List price of the saw is $389.50.

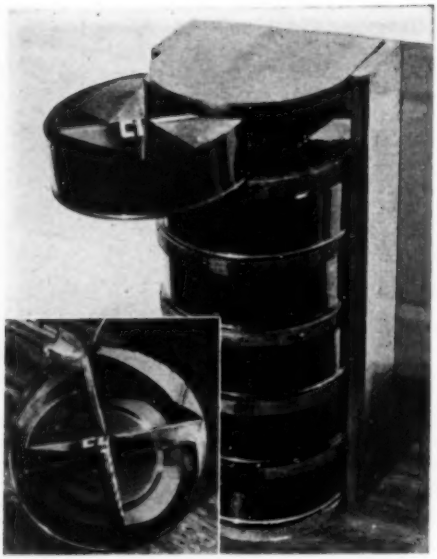

Coffee Cans Make Parts Rack

A COMPACT cabinet for storing small parts by the workbench may be made from a few 1-lb. coffee cans and some scraps of ⅜″ plywood. Cut off the cans 2″ above the base, saving the scrap for use as compartment separators. The latter are trimmed to size and soldered in place. Seven half-round, half-rectangular pieces of plywood, spaced by 2″ pieces and side strips, form the cabinet itself.—*W. H. Greenfield, Reno, Nev.*

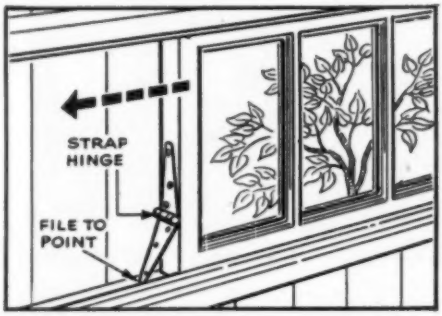

Hinge Locks Sliding Window

AUTOMATIC locking of the horizontally sliding type of window often found in summer camps can be achieved with a common strap hinge. The end of one leaf is ground or filed to a sharp point, and the other leaf is screwed to the side of the window.—*Marion L. Rhodes, Knightstown, Ind.*

Arc Method of Finding Scale Dimensions Cuts Mathematics

GIVEN any single dimension, here's a simple method by which modelmakers and draftsmen can quickly arrive at accurate scale sizes with little effort. For instance, if you're working from photos of a locomotive, all you'd need to know is one actual measurement, perhaps the stack height. You must of course avoid scaling lines of a picture that are foreshortened by perspective.

Or suppose you have the front elevation of a house that is drawn to scale, but on which only a few chief dimensions appear.

Begin by drawing a line A-A (Fig. 1). Then along this measure to scale the largest dimension you can find, 9′6″ in this instance. In ¼″ scale this measures 2⅜″ on line A-A. Now set your dividers to the 9′6″ space on the drawing (Fig. 2) and with this setting swing an arc from the measured point on A-A (Fig. 3). Next draw line A-B tangent to the arc. This is the base from which you determine other dimensions.

You can check the method by setting the dividers on another dimensioned part (Fig. 5). Then try them on line A-A until the arc just touches A-B (Fig. 6). Measure from the apex of the triangle to the point on line A-A and you'll find it's 15/16″ (Fig. 7). In ¼″ scale, this is 3′10″, the window height given in Fig. 1.—*Herbert Pfister, Bronx, N.Y.*

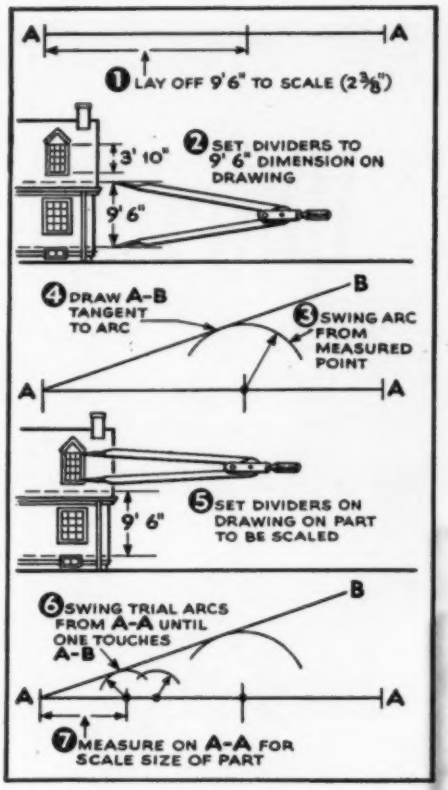

New Lock Does Three Jobs

A ROTATING cylinder permits a new Yale & Towne lock to be adapted to any one of three purposes. If you wish, it can be installed as a drawer lock, with the bolt moving vertically. Should you need a cabinet or cupboard lock, a small catch may be released with a screwdriver or other simple tool and the cylinder rotated so that the bolt will move horizontally in either right or left-hand doors.

Oil Soaking Cleans Wood Rasp

WOOD particles that have accumulated in a rasp may be cleaned out by soaking it for several hours in turpentine or lubricating oil. This will soften the dust, which may then be removed with a file card or a file brush.—*Paul H. Graham, Manchester, N. H.*

Drill Chips Fall into Can

WHEN it's necessary to bore a hole overhead, a tin can placed over the bit will catch the falling debris and keep dust from your eyes. Punch a hole in the bottom of the can and slip it over the bit. A light spring will keep the can from tipping.—*Benj. Nielsen, Aurora, Neb.*

Water Starts a Fire

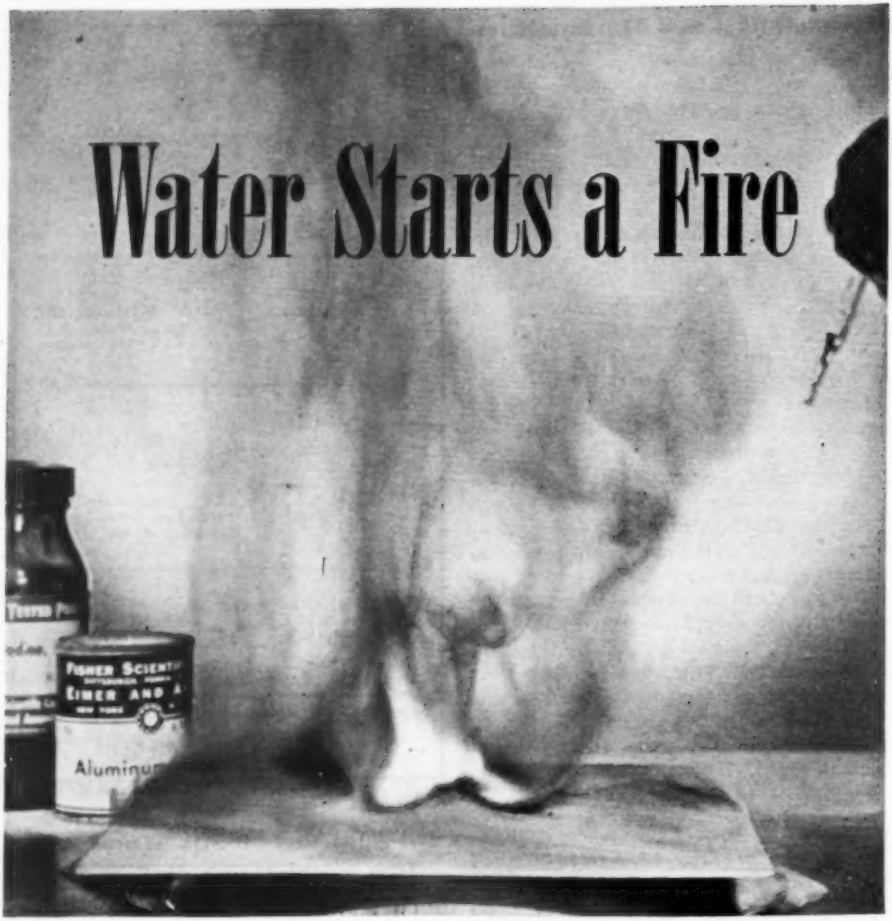

One drop of water was the spark that set off this fire. The burning material is a mixture of iodine crystals and powdered aluminum. In the absence of water, it wouldn't have burned.

Ordinarily water helps to put out a fire, but in the field of chemistry the unexpected frequently happens.

By Kenneth M. Swezey

THERE are many stunts that can be done with water, but you'd hardly expect it to start a fire. Yet in chemistry you can find cases where a single drop serves as the spark to set off a spectacular bit of smoke and flame.

It does this by acting as a catalyst. This means that the water promotes a reaction between other substances without itself becoming chemically involved. When absolutely dry, certain materials react only feebly or not at all with each other. In the presence of a trace of moisture, they react violently.

Here's an example:

In a nonmetallic container, thoroughly mix 2 cc. volumes of powdered aluminum and iodine crystals. Don't get the crystals on your hands or metals, for this material is corrosive. Put the mixture in the center of an asbestos pad, and place this in turn on the bottom of an upturned pie tin.

Also spread out several thicknesses of newspapers under the pie tin. Otherwise, condensed iodine fumes may stain the table. The vapors that will be produced are very irritating, and the experiment must be performed in a well-ventilated spot.

When you're all set, make a little depres-

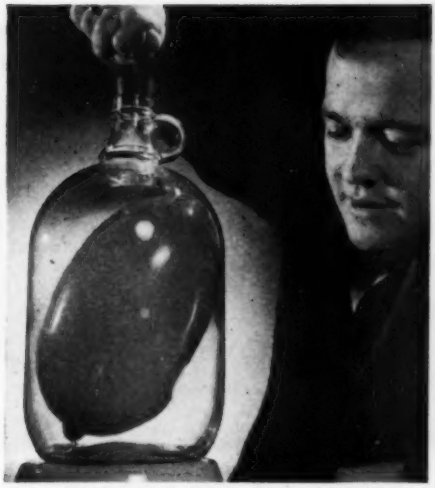

Water dissolves nearly 700 times its own bulk of ammonia gas. Here's a demonstration. A few drops of water absorb the ammonia in the jug. Greater pressure inside inflates the balloon.

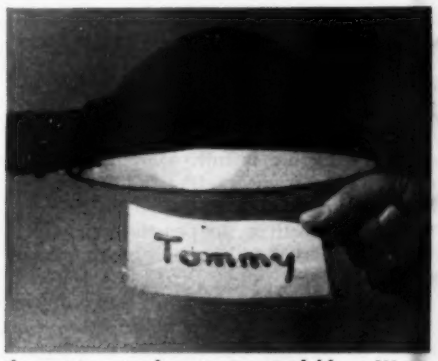

Writing done with hydrated cobalt chloride is invisible while it's wet. But dry it and the writing stands out as a vivid blue. Water unites with many compounds to form hydrates.

sion in the mound of iodine and aluminum. Add just a drop of water and stand back.

Within a few seconds the mixture, catalyzed by water, will begin to react. At first little streams of violet-red iodine will creep down the mound. Then suddenly the mixture will burst into flame, accompanied by dense smoke in considerable volume.

The chemical symbol for water, H_2O, is almost as familiar to the ordinary person as the common name for the substance it represents. And rightly so, for ordinary water is a chemical compound of first importance.

To the chemist, perhaps the most useful property of water is its ability as a solvent. You're familiar with the way it dissolves solids and other liquids.

But did you know that, at room temperature, it can dissolve nearly its own volume of carbon dioxide (soda-water gas), 50 times its own volume of sulphur dioxide, 400 times of hydrogen chloride, and nearly 700 times its own bulk of ammonia?

You can easily demonstrate the astonishing ability of water in dissolving ammonia.

Put a toy balloon into a 1-gal. glass jug, inflate it slightly with a glass or rubber tube, and seal it with a rubber band. Then turn the jug upside down and fill it with ammonia gas.

To generate the ammonia, place a few grams of sodium hydroxide in the bottom of a small flask, fit the flask with a two-hole stopper, and pass the stem of a dropping

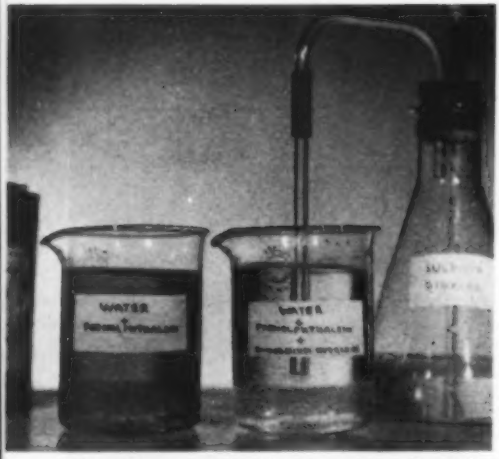

Water forms acids when it reacts with oxides of nonmetals, bases when it reacts with the oxides of metals. You can use the setup above as explained in the text to demonstrate this.

funnel through one hole. Put a delivery tube in the other hole, leading it to the mouth of the upside-down jug. Then let concentrated ammonium hydroxide fall drop by drop on the sodium hydroxide.

When the jug is full of ammonia (evidenced by a strong smell of the gas coming from the neck) turn it upright. Close the jug quickly with a stopper through which has been pushed a medicine dropper full of water.

Now squeeze the bulb of the dropper. Practically at once a good part of the ammonia in the jug will dissolve in the few drops of water. This will make a sharp reduction in the gas pressure in the jug. Because the pressure inside the balloon is now much greater than the pressure outside, the balloon will blow up to many times its original size.

Water is an extremely stable compound, but it often reacts chemically with other substances that it touches. An amateur chemist should learn to distinguish between cases where water enters into a true chemical combination and those where it is merely a mechanical accessory.

In one of the most familiar instances of chemical combination, water unites with certain compounds to form still more complex compounds called hydrates. Chemically speaking, a hydrate is identical with the dry substance except that each molecule contains a definite number of water molecules.

Physically, however, the substances may appear different. For instance, hydrated copper sulphate crystals are blue. Anhydrous, or dry, copper sulphate on the other hand is almost white. Hydrated cobalt chloride is pink, but the anhydrous form is blue.

The color-changing characteristic of cobalt chloride is often put to use. You may perhaps have come across such uses in cloth flowers or trick dresses that become alternately blue and pink with changes in air moisture.

Cloth may be easily prepared for such purposes simply by dipping it into a rather strong solution of cobalt chloride. If the cloth is then dried over heat, it will be a brilliant blue. Merely breathe on it, however, and it will magically turn pink.

One form of invisible ink may be made by using a more dilute solution of cobalt chloride. Unless thoroughly dried, writing done with this solution will remain invisible. Heat it, however, and it may be easily read.

Humidity indicators that change color also make use of cobalt chloride.

In some cases, water reacts to form completely new substances. With the oxides of metals, for instance, it forms bases; with the oxides of nonmetals, it forms acids.

To show this double nature, fill two beakers with water and add a drop of phenolphthalein test solution to each as an indicator. This indicator turns pink when the solution is basic, but remains water-white when it is acid or neutral.

Add a drop of ammonium hydroxide to one of the beakers to make the solution slightly basic and turn it pink. To the other add a few grains of calcium oxide (quicklime). This solution will immediately become colored, indicating that the neutral calcium oxide has changed to calcium hydroxide (slaked lime), a base.

Now make some sulphur dioxide gas with a generator similar to that used previously for the ammonia. Put a solution of sodium bisulphite in the flask and a little concentrated sulphuric acid in the dropping funnel.

Let the sulphur dioxide gas bubble through the slightly basic water in the first beaker used in the present experiment. After a few minutes, the pink will disappear, proving that the ammonium hydroxide has been neutralized by an acid produced by the reaction of water with sulphur dioxide. This is sulphurous acid, an unstable compound that's responsible for the bleaching power of sulphur dioxide. END



Visual Guide Aligns Putts

As GOLFERS know, a putter must be lined up squarely if you expect to sink a putt. But alignment is not always easy. Here's a visual aid for practice putting, made by Crittenden Associates, Chicago. At right angles to the line of travel are contrasting white and black lines. When the putter head moves back and forth over this, it's claimed that any misalignment is quickly noticed.

Grill Packs Up for Carrying

PICNICS anywhere are a cinch with a new portable charcoal grill and broiler introduced by Torngren Stainless Steel Products, Inc., Somerville, Mass.

When packed, the 7-lb. grill tucks away in a space only 7″ by 13″ by 13″. Inside the case there's ample room for a generous supply of charcoal. A catch prevents accidental opening of the lid.

At the picnic grounds, it can be set up in a few seconds. Unpack the parts, invert the body of the case, and insert the three legs in the slots that are provided. Fit on the cone-shaped burner, install the grate, and you're ready to fire up.

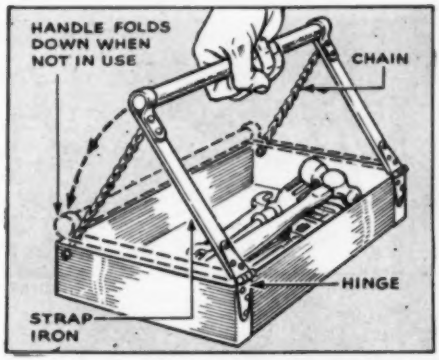

Tool Tray Has Hinged Handle

THERE's no handle in the way when you want to remove tools from this tray. Set down the tray after carrying it to the working area, and the hinges allow the handle to drop against one side. Two short lengths of furnace chain limit the travel of the handle.—*Asher Wolfe, Bloomsburg, Pa.*

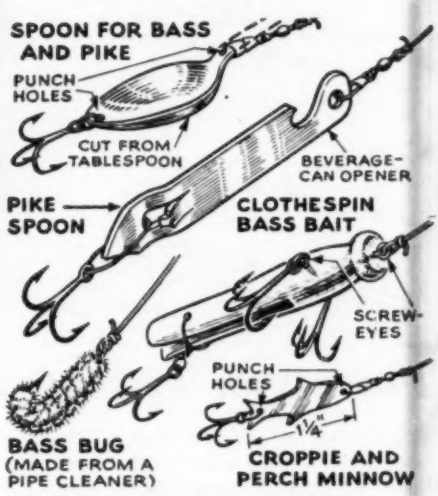

Odds and Ends Lure Fish

IF YOU'D like to spend an evening or two experimenting with homemade fishing lures, you may be surprised at how you can both save cash and catch fish. The ones above may not be as fancy as those you can buy, but each has proved its worth on the line.

As you'll note from the drawing, all the lures call only for common materials. At least two can be made in a few minutes for emergency use. Cut the minnow from tin-can stock.—*R. A. Jenkins, Los Angeles.*

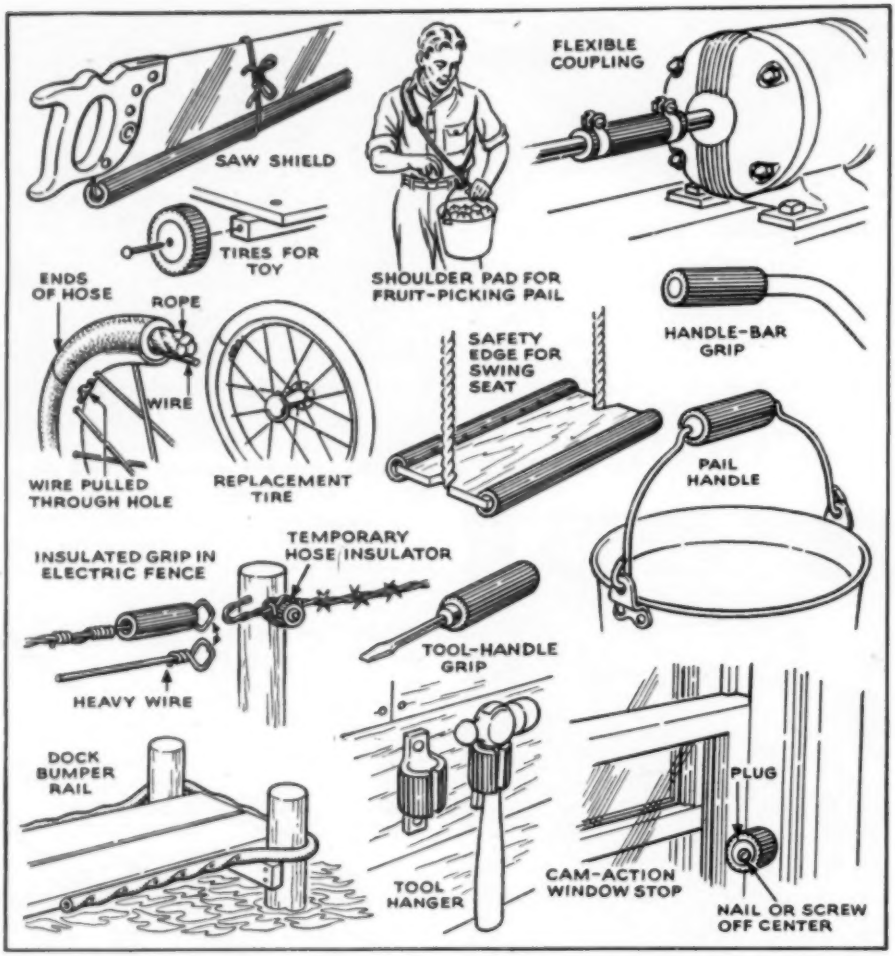

Fourteen Uses for Old Garden Hose

If you've bought some sleek new garden hose, don't be too quick to throw out the leaky old hose. Suggested above are some general applications, and you'll find plenty of others. If you have to slit a length, as in getting it on a pail handle, a linoleum knife does the job nicely. Cement the hose on hardwood dowels in making window-lock cams or miniature toy wheels.—*Ralph S. Wilkes, Keuka Park, N. Y.*

Cheese Box Makes Brush Rack

Test tubes set in holes bored in one side of a cheese box are ready holders for small brushes. Use pins to keep the bristles off the bottom, and add a small amount of turpentine to each tube to keep the bristles soft. The box may be screwed to a wall or cabinet.—*Victor H. Lamoy, Upper Jay, N. Y.*

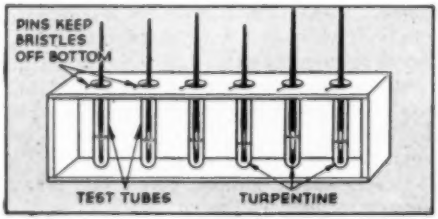

Painted "Flagstones" Brighten Porch or Patio

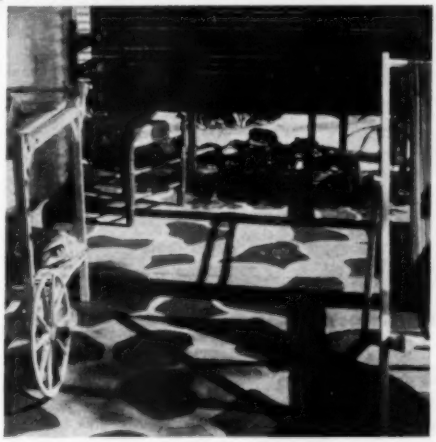

WITH a few cans of enamel, any cement floor can be painted to simulate flagstones. Use paint suitable for cement.

Clean grease and dirt from the floor with a solution of one part muriatic acid and three parts water. Wear rubber gloves and apply it with a mop or broom. After the acid has stopped bubbling, in 20 or 30 minutes, wash the floor with a hose.

Select two colors of paint that somewhat resemble natural stone. I used brick red and sandstone. Paint the "stones" in irregular sizes and shapes, leaving a 1½" band between each. After two coats have been applied to the "stones," paint the bands a French gray. Then cover the entire floor with two coats of high-grade spar varnish. —*Jack W. Jennings, Kansas City, Mo.*

Springs Lighten the Job of Handling Heavy Oars



BOATS with heavy oars can be rowed more easily if you attach a screen-door spring to each of the oars as illustrated. The springs support part of the weight of the blade on the return stroke.

Insert a screw eye under each oar adjoining the grip. Attach one end of the spring to this. The other end may be anchored in one of several ways. Perhaps the simplest is another screw eye placed just under the oarlock. A piece of heavy wire also might be twisted in the lock. The most shipshape, however, is a hole drilled near the edge of a large washer around the oarlock.—*Ralph S. Wilkes, Elbridge, N. Y.*

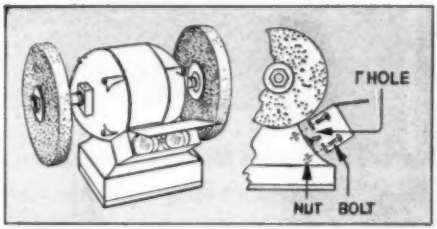

You Can't Forget the Goggles

IF YOU sometimes forget to wear protective goggles while using a grinding wheel, here's a hint that will force you to remember them.

Over the switch mount a 2" by 2" by 6" wood box. Anchor it by drilling holes in the grinder base and inserting two small bolts. Place a hinged lid on the box and keep your goggles there. You then can't reach the switch unless you first remove the goggles.—*W. H. Grant, Pleasant Valley, Iowa.*



Carving Tool Made from Pen

CRAFTSMEN who carve miniature models frequently have difficulty locating steel gouges and chisels sufficiently delicate for the work. I've found that excellent tools can be made from lettering pens.

Mount the pen in a hollow hardwood dowel with the point inward, anchoring it with a plug glued in place. Taper the tool end of the holder. Sharpen the edge of the point and grind it to the desired shape.—*K. T. Fowler, Evanston, Ill.*

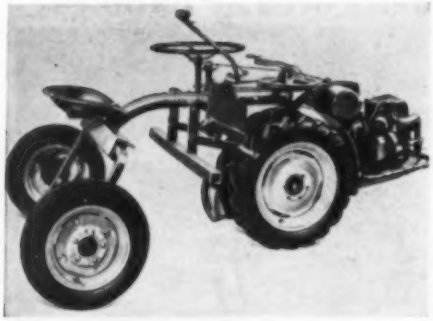

Tractor Built Like Tricycle

So CLOSELY spaced are the front wheels that this lightweight tractor has tricycle-like maneuverability, turning easily in its own length. The front-mounted, air-cooled, 5-hp. gas engine provides dead weight for extra traction, while one or two 50-lb. weights may be fitted to each rear wheel. Spacing of the rear wheels is adjustable from 38" to 72", and one rear wheel may be set to roll on a lower plane than the other. Tool-bar control is simplified by heavy coil springs. More springs for heavier tools may be added to the 725-lb. tractor. The Ridemaster ⓣ is manufactured by the Bolens Products Division of the Food Machinery Corp., of Port Washington, Wis.

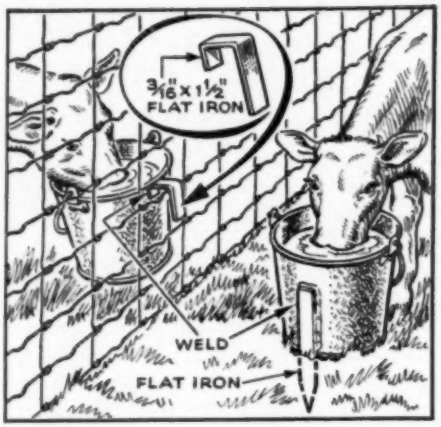

Two Ways to Stop Pail Upsets

CALVES, colts, and other young stock often upset their pails when feeding or drinking. Two methods of permitting the stock to be self-fed, yet guarding against upsets, are shown above. At the left, a piece of iron—bent as shown—is welded or soldered to the bucket, allowing it to be hooked on a fence or gate. At right, a flat piece of iron with one end sharpened is joined to a pail. The spike is forced into the ground at feeding time, holding the pail upright.—*Victor H. Lamoy, Upper Jay, N. Y.*

Hook Near Faucet Is Handy for Washers

A CUP hook screwed into the wall near an outdoor faucet is convenient for hanging spare garden-hose washers. Those extra washers also will remind you to check the washer as you unscrew the hose and, if it is loose, to remove it.—*Robert Hoppough, Waukegan, Ill.*



Two-Ton Hoist Built by Farmer

EARL DEARDORFF, Hale, Mo., farmer, took a lot of kidding from neighbors when he built the gallows-like machine pictured at left, but the hoist quickly proved its usefulness. One of its first jobs was pulling a neighbor's prize bull from a cistern where it had fallen. Built of I-beams and channel iron, the 13′ hoist is one of the farmer's most valued pieces of equipment. With it he lifts hay racks onto wagons, raises tractors for repairs, yanks out posts imbedded in concrete, and hauls damaged farm equipment to his repair shop. The hoist, mounted on Ford V-8 wheels, is pulled by truck or tractor.—*Harold Severson, Kenyon, Minn.*

Introducing KODAK TOURIST CAMERA f/4.5 with NEW built-in picture-taking aids

Here's the very latest thing in folding cameras—newly designed, smartly styled, and equipped to help you get a better picture on every shot.

Check the exclusive picture-taking aids built right into the camera and see why it's the finest folding camera at the price. Camera, $61.50 plus tax; Field Case, $10; Kodak Flasholder, $9.50 plus tax . . . At your Kodak dealer's.
Eastman Kodak Company
Rochester 4, N. Y.

(Prices subject to change without notice)

"Kodak" is a trade-mark

A—Bracket takes accessory range finder

B—Bed shutter release gives steady control

C—Built-in view finder permits rapid framing

D—Sliding computer simplifies exposures

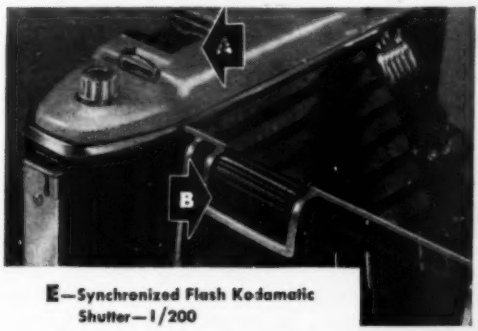

E—Synchronized Flash Kodamatic Shutter—1/200

F—Depth-of-field scale etched on lens mount

G—Accepts Kodak Combination Lens Attachments, Series VI

H—Uses Kodak 620 Films, gives 2¼ x 3¼ black-and-white snaps, 2⅞ x 4⅜ Kodacolor Prints



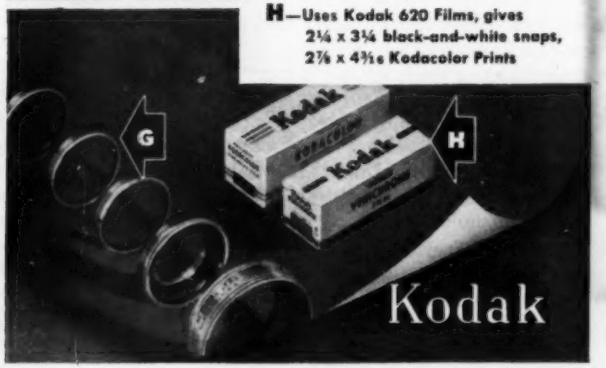

INCH BY INCH . . . MILE AFTER MILE

It's PLYMOUTH for Roomy, Pillowed Riding Ease

The big, roomy Plymouth won't knock your hat off. And even for the lanky, there's legroom to spare.

This low-priced car is engineered to give you extra inches where inches do the most good. But Plymouth's great ride comes from more than space to move around in. It's an *Air-Pillow Ride*—comfort built into mile after mile.

Seats are chair-height—so a man can sit up like a man. And you literally ride on air when you ride on Airfoam Seat Cushions, available on Special De Luxe Plymouths at moderate additional cost. Millions of tiny air pillows give to your slightest body pressure, mold themselves to you for restful support.

You ride *between* the axles, not over them. That's a comfort difference. Bigger, fatter Super-Cushion Tires, standard equipment on Plymouth, soak up road shocks from sides *and* below. The longest wheelbase in its price field makes for a still more *level* ride.

These are only a few of the dozen and more Plymouth features that speak up for a great ride—and a great car. There is a difference in low-priced cars, and Plymouth makes the difference.

PLYMOUTH BUILDS GREAT CARS

PLYMOUTH BUILDS GREAT CARS . . . GOOD SERVICE KEEPS THEM GREAT. *Your nearby Plymouth dealer will provide the service and factory-engineered parts to keep your present car in good condition while you're waiting for your new Plymouth.* **PLYMOUTH Division of CHRYSLER CORPORATION, Detroit 31, Michigan**

Car polishing is easy

with this exclusive DuPont formula!



A small section of the surface of an average car magnified 20 times. The left side is shown still covered with Traffic Film. The right side has been cleaned with Du Pont NO. 7 POLISH

DU PONT №7 POLISH

Contains "stroke saving" methyl cellulose

Here's a polish that turns a chore into a pleasure! It saves time, saves work! Du Pont NO. 7 POLISH is made by a patented formula . . . loosens dirt and grime quickly . . . cleans up *fast*, leaving a dry, brilliant shine. Next time your car needs a cleaning, use NO. 7 POLISH, the short-cut to car beauty!

Especially
FOR NEW CARS!

Here's a wax-polish made especially for new cars—and others whose finish is in first class condition. It cleans and wax-polishes in one easy operation. Produces a brilliant, lasting lustre. Keeps cars looking new.

DU PONT SPEEDY WAX

DU PONT

BETTER THINGS FOR BETTER LIVING
. . . *THROUGH CHEMISTRY*

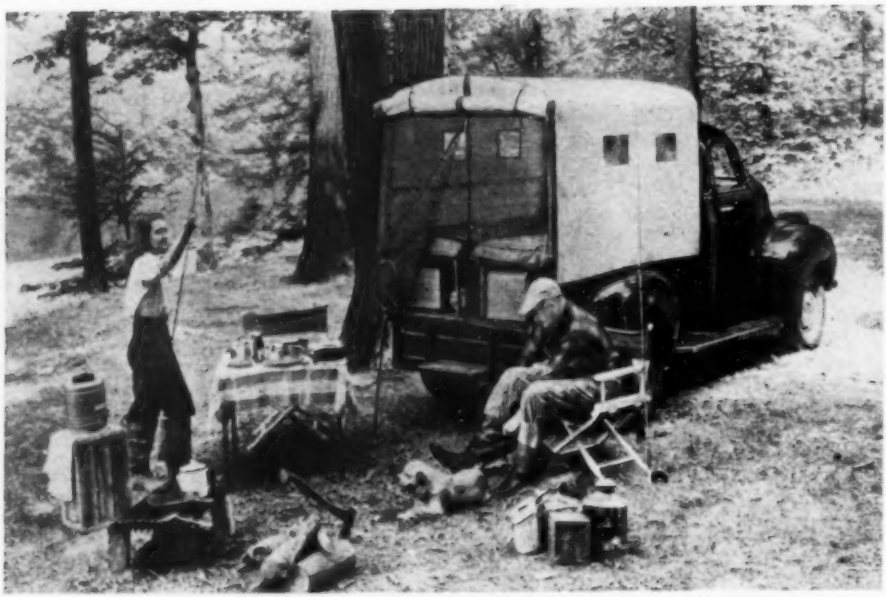

Tent Rides on Truck

HERE's a way to turn a pickup truck into a mobile bunkhouse for camping trips. The Sportsman's Top Ⓣ, shown installed, consists of waterproof-canvas walls and roof over an aluminum frame. After assembly, it can be attached in 15 minutes by fastening only four bolts. The rear end has both a roll-up wall and a plastic screen to keep out insects. Box springs on legs make removable bunks over storage chests.

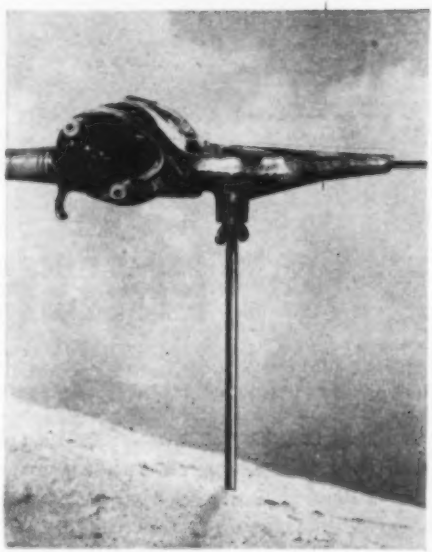

'Hand' Holds Fishing Rod

A NEW rod-and-reel anchor, shown above, lets a fisherman doze while waiting for a bite. The holder is molded of tough, flexible plastic over a brass bushing that screws onto a metal mast 23 inches long. While the rod lies in a trough, springlike prongs grip the reel. The device is made by Allegheny Mold & Die Co., of Oakmont, Pa.

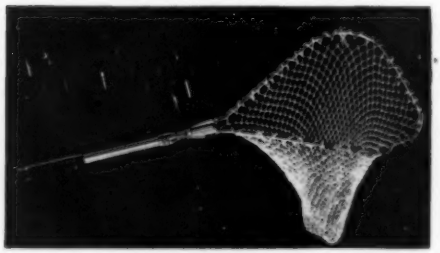

New Net Weighs 12 Oz.

THANKS mainly to its hollow aluminum handle, this sturdy new net for game fishing weighs just 12 ounces. Only 16¾ in. long when folded, it opens to 29¾ in. and can be extended to 39¼ in. Made by Stream-eze, Inc., of South Bend, Ind., it has a bail of Dowmetal Ⓣ, brass fittings, rubber handhold, and net of cotton or nylon.

NOW THOUSANDS WHO NEVER RODE BEFORE CAN ENJOY MOTORCYCLING

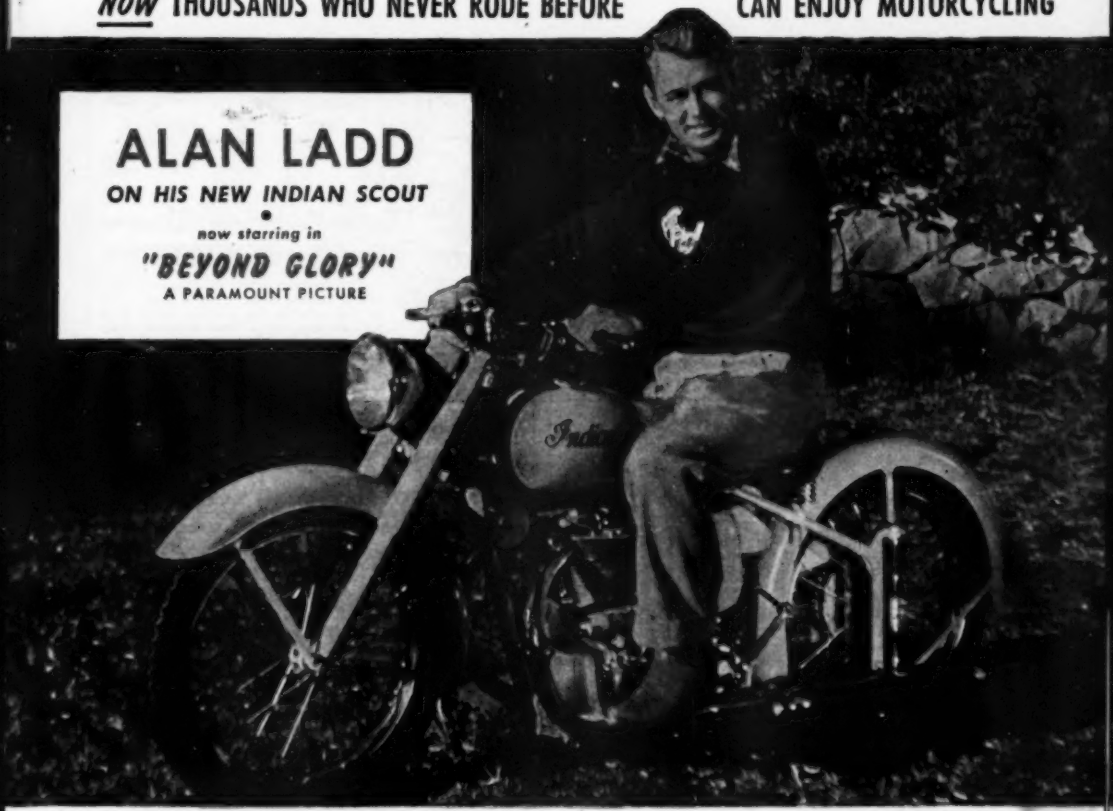

NEW Indian LIGHTWEIGHTS REVOLUTIONIZE SPORT OF MOTORCYCLING

A new sport is sweeping America—motorcycling! And Indian is enabling hundreds of thousands to enjoy it by bringing out new lightweight models that anyone, of any age, can ride in comfort and safety. Years ahead in design, incorporating ideas never previously heard of in motorcycles, the new Indian Arrow and Scout are truly revolutionary. If you've never ridden a motorcycle, you don't know what you're missing. See your Indian dealer today and find out!

Indian —WORLD'S MOST MODERN MOTORCYCLES

Dealer Inquiries Invited

Indian Motocycle Company • Springfield, Mass.

SAFEST MOTORCYCLES EVER BUILT
•
LEARN TO RIDE IN ONE EASY LESSON
•
COSTS LITTLE TO OWN AND OPERATE
•
SENSATIONAL IN PERFORMANCE
•
YEARS AHEAD IN DESIGN

SEND FOR FREE CATALOGUE

Indian Motocycle Co., Dept. PS98
Springfield, Mass.

Please send me Catalogue containing complete information about your new Indian lightweight models.

☐ I own a _____ motorcycle
☐ I do not own a motorcycle
☐ I am over 16 ☐ under 16

Name _____
Address _____
City _____ State _____

Here's "before and after" proof why *You Should Simoniz Your Car!*

Simoniz Kleener makes dull cars look new again Nothing equals wonderful Simoniz Kleener—for safely cleaning the finish and making cars look really new again. Anyone can do a professional job of Simonizing without a buffer—just inexpensive Simoniz and Simoniz Kleener. Use Liquid Kleener for a "quickie slick-up" or before applying Simoniz. Extremely dull cars require Paste Kleener. To protect the finish and make it last longer—follow up with famous Simoniz!

THE SIMONIZ COMPANY, CHICAGO 16, ILL.

MOTORISTS WISE

SIMONIZ

T. M. REG. U. S. PAT. OFF.

MAKES THE FINISH LAST LONGER



Loose Bathroom Fixtures Just Need SMOOTH-ON

Cup holders, shelf brackets, hooks, towel racks, soap dishes, etc. stay in place, once you anchor them with Smooth-On No. 1 Iron Cement. You apply it to screws and bolts and into the holes where they belong. Smooth-On hardens quickly and the repair stays tight, for Smooth-On expands a little as it sets. Get a 1¾-oz., 7-oz. or 1-lb. container of Smooth-On No. 1 and keep it handy not only for tightening loose parts and fixtures, but to stop leaks and seal cracks. If your hardware store hasn't Smooth-On, write us.

FREE Repair Ideas

Send for YOUR free copy of the 40-page Smooth-On Handbook of time-saving, money-saving repairs you can make in the home, on the car. Just mail us a postcard.

SMOOTH-ON MFG. CO., Dept. 58J
570 Communipaw Ave., Jersey City 4, N. J.

Do it with

SMOOTH-ON

THE IRON CEMENT OF 1000 USES

X-acto*

HANDICRAFT KNIVES & TOOLS

Choice of experts in every art and craft field. A blade for every purpose—quickly interchangeable. Singly and in sets, 50¢ to $50.00. *(Slightly higher in Canada.)*

Buy where you see this sign—
At hobby, hardware, gift and dept. stores.

X-acto Crescent Products Co., Inc., N.Y.
In Canada, Handicraft Tools, Ltd., Toronto

*Reg. U.S. Pat. Off.

Dependable

CHAMPION

America's Favorite Spark Plug

The American farmer subjects spark plugs to sustained and severe service in all kinds of engines—car, truck, tractor and other power-driven farm equipment. As a result, he is a qualified spark plug expert. Dependable Champion—America's Favorite Spark Plug—is the *overwhelming* favorite of farmers everywhere.

CHAMPION SPARK PLUG COMPANY, TOLEDO 1, OHIO

FOLLOW THE EXPERTS

DEMAND NEW DEPENDABLE CHAMPIONS FOR YOUR CAR

Listen to the CHAMPION ROLL CALL . . . Harry Wismer's fast sportscast every Friday night, over the ABC network

SUPER-SHEAR

. . . a new principle in a precision file for the industrial or amateur craftsman

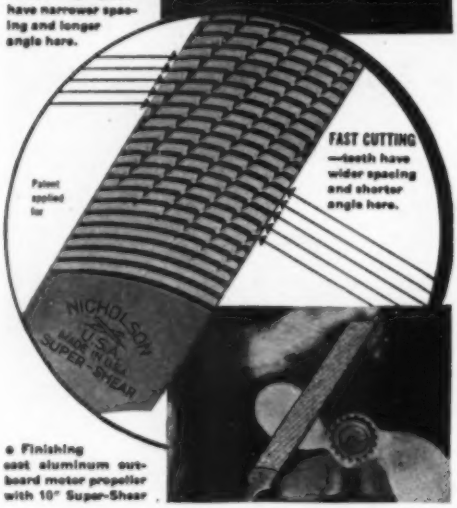

• Finishing cast aluminum outboard motor propeller with 10" Super-Shear

A development by Nicholson, the Super-Shear is a curved tooth file that *smooths as it roughs.* Practically two files in one! Its extremely sharp teeth are *milled* in an arc that is off-center in relation to the axis of the file. Thus, when used with the usual overlapping right-to-left stroke, the Super-Shear "smooths out its tracks as it goes." Longitudinal serrations help to keep the file clear of chips; to overcome "chatter" and the tendency to run off the work.

Use Nicholson Super-Shear Files on the flat or convex surface of aluminum, brass, babbitt, bronze, copper, magnesium, cast iron, annealed tool steel; on plastics, hard rubber and hardwood.

Unwavering uniformity is assured under the sweeping Nicholson guarantee of *Twelve perfect files in every dozen.* And after it has given you long service, the Super-Shear may be resharpened at low cost. Available through good hardware and industrial distribution houses. For free booklet, "File Filosophy," write to:

NICHOLSON U.S.A.

NICHOLSON FILE CO.
19 Acorn St., Providence 1, R. I.
(In Canada, Port Hope, Ont.)

NICHOLSON FILES *FOR EVERY PURPOSE*

Keep Brushes like New

At Paint, Hardware, Dept., and 5 & 10c Stores
Patent Cereals Co. Geneva, N. Y.



Gerstner TOOL CHESTS
The sturdy structure of **Gerstner chests** assures many years of satisfactory service. Free catalog for machinists and toolmakers.
GERSTNER TOOL CHESTS
548 Columbia St. **Dayton 7, Ohio**

Your weight does the work with a "YANKEE"

QUICK-RETURN SPIRAL SCREW DRIVER



● Save your wrist: drive and draw screws faster. Just push on a "Yankee" 130A Spiral Driver. Your weight and the spiral turns the screw without blisters or fatigue. Quick-return spring in handle holds blade in slot and returns the handle after every stroke.

★ Write for the "YANKEE" Tool Book ..FREE..

"YANKEE" TOOLS NOW PART OF STANLEY THE TOOL BOX OF THE WORLD

NORTH BROS. MFG. CO.
Philadelphia 33, Pa.

HOW TO TAKE BETTER TIME EXPOSURES

Paint out the dark spots with your flashlight

...it's a trick that every expert photographer knows and uses. Your stationary lights are fine—but, no matter how many you use, they may leave dark, shadowed areas that show up on your finished picture. Avoid these amateurish black-outs by moving your flashlight beam back and forth across the dark areas while you're making the exposure. Do it just as a painter would use a brush. And be sure to keep your flashlight powered with "Eveready" batteries. Powerful, dependable, they outlast all other brands. *

.....A little light on the subject of the dark room!

Here's where your flashlight's handy, too! Wrap 2 or 3 layers of dark green or red cellophane over your flashlight lens and you have a safe portable light to use in your dark room. It *won't* streak film and it *will* help you to locate objects and to operate conveniently.

*In general-purpose 4-ohm intermittent tests THIS "EVEREADY" BATTERY OUTLASTS ALL OTHER BRANDS!

Who thought up this test that takes the guesswork out of buying flashlight batteries? The American Standards Association, no less!... And this is the test that *most closely approximates the average use* you give batteries in *your own* flashlight. Be bright tonight! Buy "Eveready"!

The trade-mark "Eveready" distinguishes products of

NATIONAL CARBON COMPANY, INC.

30 East 42nd Street, New York 17, N. Y.

Unit of Union Carbide UCC *and Carbon Corporation*

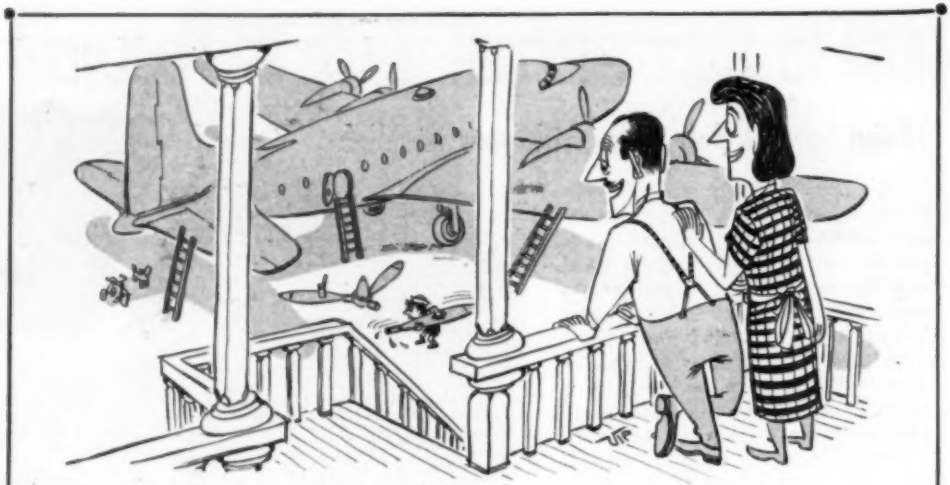

"And to think how we laughed when Junior asked for a can of Weldwood Glue to build a model plane"

When you want a wood-to-wood bond that will really hold... remember Weldwood Glue. It's quick to mix... easy to use... tremendously strong... stain-free... rot-proof... and permanent. At hardware stores, lumber yards, chain stores, in 15¢, 35¢, 65¢, 95¢ and larger sizes.

WELDWOOD

PLASTIC RESIN GLUE

United States Plywood Corporation, New York 18, N. Y.

WITH MOLLY YOU CAN FASTEN ANYTHING and do it quickly, neatly and safely. MOLLY will hold fixtures securely to floors, ceilings or any hollow wall construction... Simple to install, all you need is a screw driver. Sold by leading hardware stores everywhere.

Write for Free Descriptive Folder

SEE IT! TRY IT!

"Lincwelder" 180 AC Accessories as shown, $19.00

NEW LOWEST-PRICED WELDER for World's Easiest Welding

For Repairing, Hardfacing Building Equipment

Easy to weld. Arc striking is now automatic. The instant the electrode touches the work, "Lincwelder's" exclusive "Arc Booster" blasts the end of the electrode with an extra burst of welding current to start the arc. Eliminates electrode sticking and bothersome scratching formerly needed to get the arc started.

Ideal for rural power lines and for use on farms. Draws less than 37 amps. when welding at 180 amps. Approved by power companies and REA. *Safe to operate.* Open circuit voltage never exceeds 52 volts.

Lowest priced welder. Has many high quality features found only in Lincoln industrial welders . . . *yet sells for only $150 . . . lowest cost of any welder of its capacity.*

Full details in Bul. 370. See your local Lincoln Weldealer or write The Lincoln Electric Company, Dept. 313, Cleveland 1, O.

Here's Why New AUTO-LITE STA-FUL Battery

...needs water only 3 times a year*

ORDINARY BATTERY

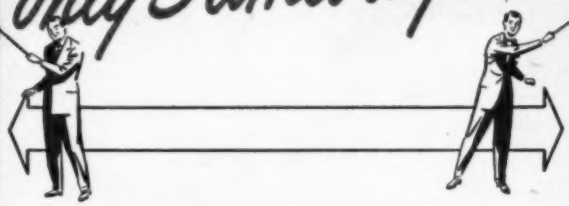



STA-FUL BATTERY

HERE'S WHAT HAPPENS INSIDE AN ORDINARY BATTERY

This battery is now full. Small liquid reserve gives battery plates little protection against damage and loss of power if evaporation lowers liquid level.

HERE'S WHAT HAPPENS INSIDE AUTO-LITE "STA-FUL"

The new "Sta-ful" has more than 3 times the liquid reserve of ordinary batteries. Gives its plates added protection. Battery lasts longer too!

ORDINARY BATTERY

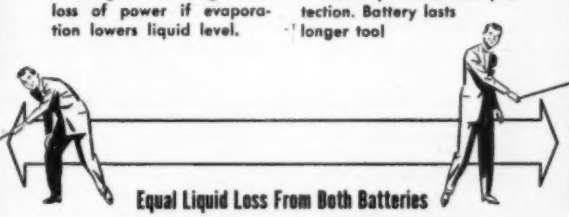



STA-FUL BATTERY

Equal Liquid Loss From Both Batteries

Plates at the left are now exposed and inactive because of the small liquid reserve provided in ORDINARY battery.

The "Sta-ful" Battery plates are still kept fully covered and protected because of the more than 3 times greater liquid reserve.

*In normal car use

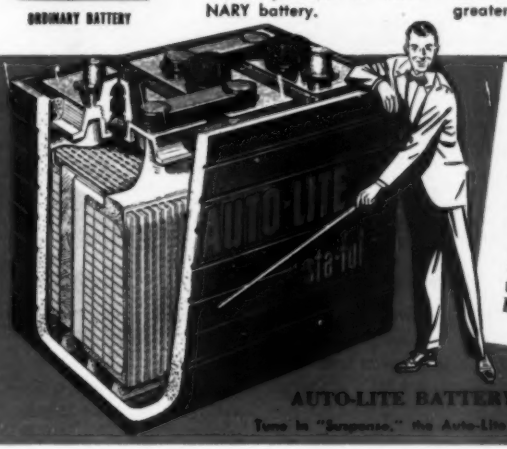

Why the "Sta-ful" Design Is Possible

Fibre-glass mats help to keep the power-producing material from shedding—add to battery life. This makes possible the "Sta-ful" construction with its smaller sediment well which permits room for a liquid reservoir with over 3 times the usual capacity at the top of the battery. Make your next battery an Auto-Lite "Sta-ful."

AUTO-LITE BATTERY CORPORATION, Toledo 1, Ohio

Tune in "Suspense," the Auto-Lite Radio Show—Thursdays, 9:00 P.M.—E.T. on CBS

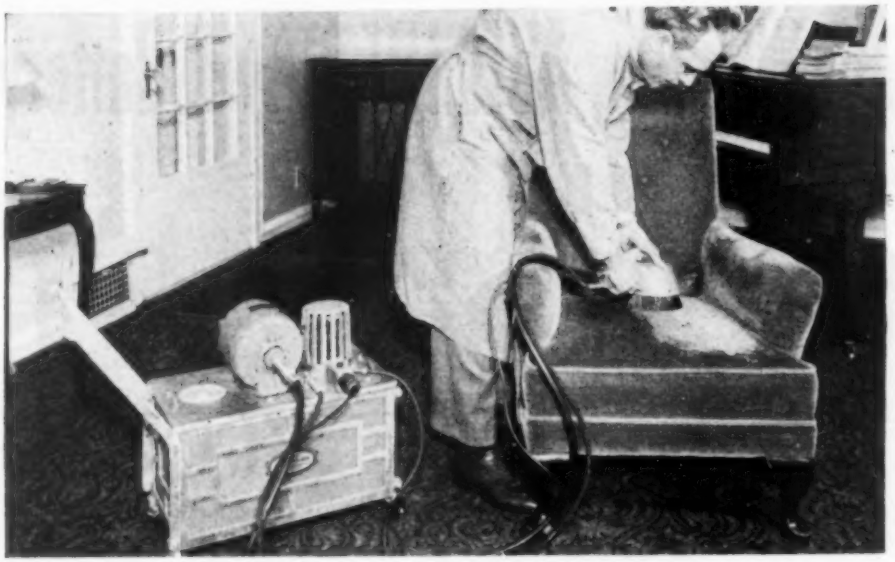

Shampooer Works Fast

THE new portable, lightweight shampooer shown above is said to give your upholstery a beauty treatment three times as fast as any other method. The cleaning solution, controlled by a handle valve, is forced out through its magnesium head in a fine spray of dry suds. The brush, mounted at the end of an 8-ft. flexible shaft, is driven by a ¼-hp. motor. The machine is made by Certified Equipment Co., of Cleveland.

Arms Grip Brush, Razor

YOU'LL never have to grope around for your shaving equipment with the Mazwell Shave-King ®, shown at left. Patented locking arms grip any size brush and razor and hold them ready to hand. The hollow base is a receptacle for used blades.

Disk Drubs Phone Germs

SNAP a Safti-Khlor ® disk in your telephone mouthpiece, say its makers, and you can stop worrying about germs there for the next four months. The flat plastic disk is said to kill 40 to 82 percent of pathogenic germs in a minute—without blocking your voice.

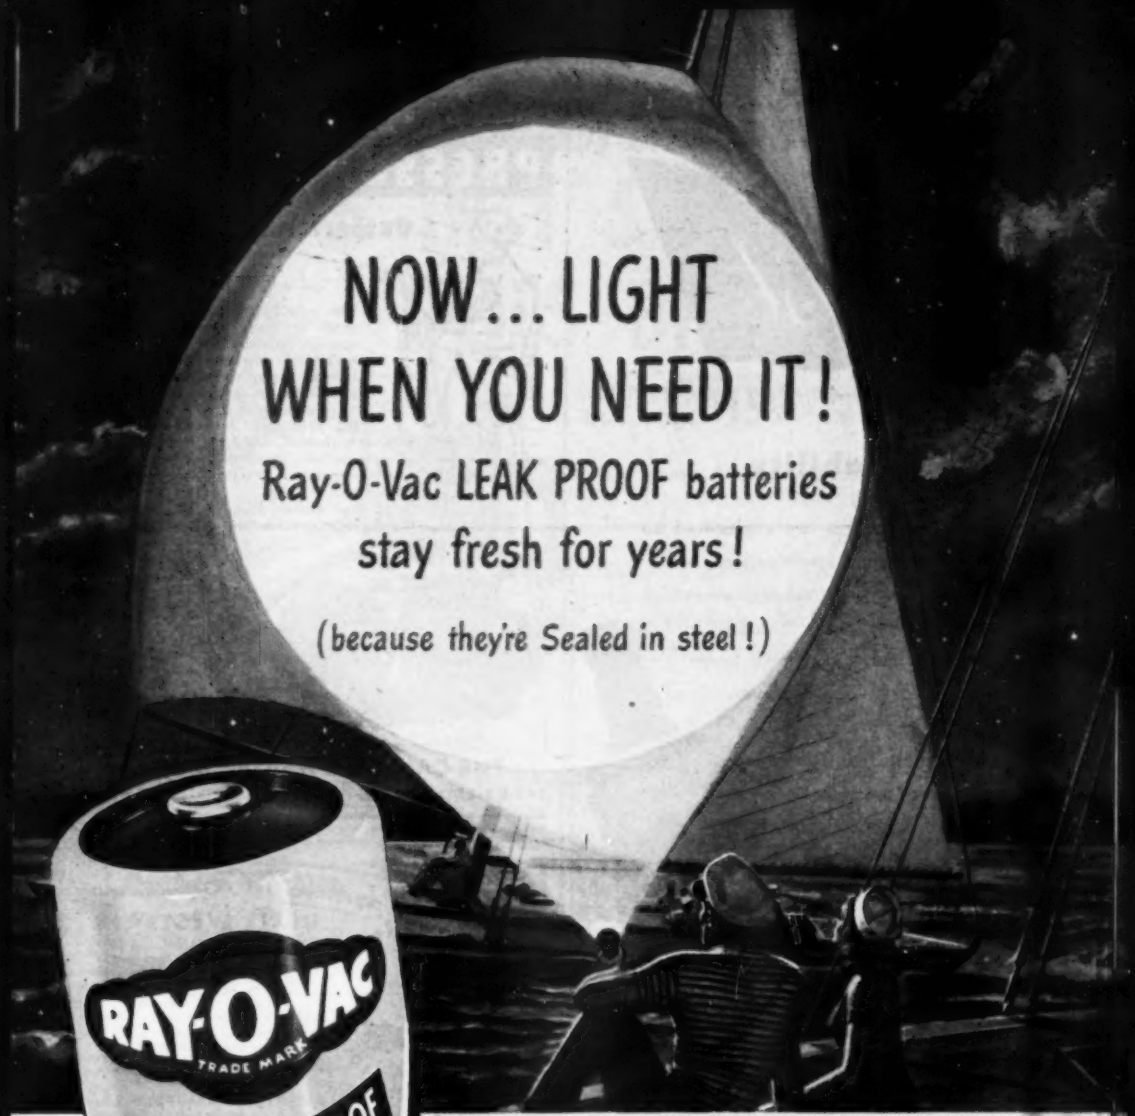

© 1948 BY RAY-O-VAC COMPANY, MADISON, WIS. RAY-O-VAC CANADA LTD., WINNIPEG, MAN.

Guarantee: If your flashlight is damaged by corrosion, leakage, or swelling of this battery, send it to us with the batteries and we will give you FREE a new comparable flashlight with batteries.

Ask for Ray-O-Vac Leak Proofs

Buy Spares... *they stay fresh*

First

in Reliability

AC Spark Plugs are engineered to the equipment specifications of car and truck manufacturers—which explains why more than 50% of new cars and trucks leave the factory equipped with AC plugs. AC's give *you* wider Heat Range per plug—greater freedom from oil and oxide coatings—the utmost in spark plug reliability.

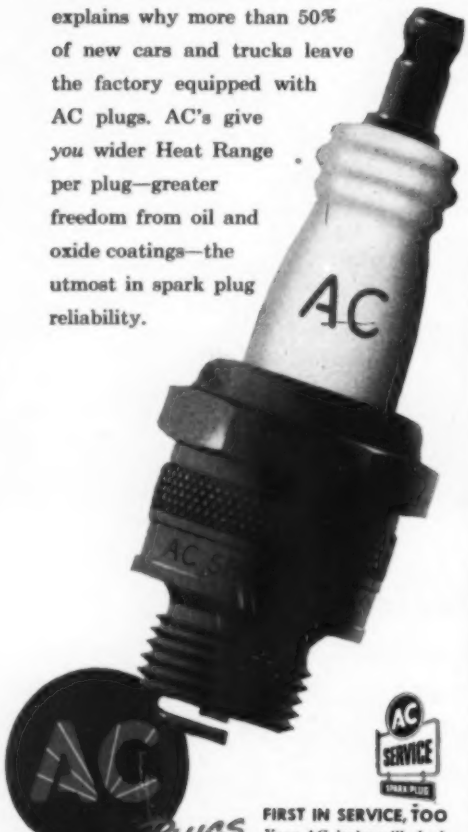

AC SPARK PLUGS

FIRST IN SERVICE, TOO

Your AC dealer will check your spark plugs to see that they are of the right Heat Range.

PRESSURE QUEEN

Outperforms them all

The only portable spray painting outfit having 4 cylinders in space usually required for one. Paints buildings; refinishes automobiles; inflates tires; lubricates chassis and farm machinery. Does more work in an hour than hand brushing in a day. Uniform pressure without pulsation. Ideal for home, farm, service station, machine shop and contracting painter. Factory tested and guaranteed.

● If your dealer does not sell Pressure Queen, order direct for immediate shipment.

THE CAMPBELL-HAUSFELD CO.
151 RAILROAD AVE. HARRISON, OHIO

for AMAZING acceleration

DIXIE-WESTERN
DUAL INTAKE MANIFOLDS for V-8 FORDS AND MERCURYS

$15.00 Gas Line and Throttle Kit $2.50 extra

Chrome Plated Velocity Stocks — $1.50 ea

By Test: Increased Acceleration by 26%
Increased Power and Speed by 11%

All DIXIE-WESTERN manifolds are brightly polished cast aluminum.

DIXIE-WESTERN MANIFOLD CO.
Box 364 • Los Angeles 43, California

Easy and Cheap to Operate

SAVE TIME, WORK, MONEY!

SHAW DU-ALL

and "PEPPY PAL" TRACTORS

PLOW

CULTIVATE

These rugged walking or riding tractors are ideal for farm, truck garden, orchard, poultry farm. Operate on a few cents an hour. A child can handle them.

DO DOZENS OF JOBS Both riding and walking tractors quickly and easily plow, cultivate, harrow, disk, bulldoze, spray, haul, grind, saw wood, etc.

LOW FACTORY PRICES Buy direct or through your dealer. Year's guarantee!

RIDING TRACTORS 4 models from 5 to 12½ H.P., 58 in. wheelbase, 36 to 52 in. wide, 24 in. plant clearance. Hand or electric starter. Walking Tractors 1½ to 3 H.P.

FREE Illustrated folders giving complete details and price lists—write today!

SHAW MFG. CO.
5709 FRONT ST., GALESBURG, KANS.
668PS NORTH 4TH ST., COLUMBUS, O.

IN THOUSANDS OF HOME WORKSHOPS...

5-IN-1 SHOPSMITH DOES BIG JOBS

COMPLETE 5-IN-1 TOOL $159.50 With special ½ H.P. ball bearing motor $195.50

Do your present power tools balk at big stock? Do they hold you back from the jobs you really want to do?

Then take a look at *SHOPSMITH* — the new, big capacity circular saw, wood lathe, disc sander, vertical and horizontal drill press all in one. Each has big capacity . . . built to husky specifications. And see what big jobs *SHOPSMITH* does in limited home workshop space.

With all its big capacity and rugged construction *SHOPSMITH* stands just 59" long by 18" wide.

Check *SHOPSMITH* against your woodworking needs. See it demonstrated. For name of nearest *SHOPSMITH* dealer, and free folder, write **Department M, Magna Engineering Corporation, 465 California Street, San Francisco 4, California.**

1. SHOPSMITH AS CIRCULAR SAW

Has 8" saw blade; depth of cut 2¼"; 14½" x 17" table, with extension 54" x 17"; up to 46" between blade and fence . . . so you can cut to center of 92" board. Table tilts to any angle — positive lock. Takes work on either side of blade. New principle provides micro-adjustment of distance between fence and saw blade.

Includes: 8" combination saw blade and arbor. Table extension. Mitre gauge. Rip fence. Saw guard. *And in less than one minute you can change from saw to lathe, disc sander or drill press!*

2. SHOPSMITH AS WOOD LATHE



Has 34" between centers. Fifteen-inch swing. Also turns light metals, plastics. No wrench needed for setup. Finger-tip pressure slides tool rest which locks in position. Variable speeds. Quill feed 4¼".

Includes: Tool rest. Drive center. Cup center. *SHOPSMITH is precision-machined, factory-tested for accurate work.*

3. SHOPSMITH AS DISC SANDER

Has 12" disc; 14½" x 17" tilting table . . . supplies more work support than single-purpose sander. Adjustable mitre gauge and rip fence assure accuracy in squaring, mitering, finishing. *SHOPSMITH* discs can be removed and replaced in seconds . . . so you can sand a job with various grits.

Includes: 12" disc; balanced dynamically and statically. Mitre gauge. *SHOPSMITH is sturdily constructed . . . will take all the wear and tear you would ever give it.*

4. SHOPSMITH AS VERTICAL DRILL PRESS



Drills to center of 15" circle. Has 27" table-to-chuck clearance. Drills big stock. Has 4 grease-sealed Fafnir ball bearings. Quill can be fed from *left or right* side. Spindle: ⅜" Dia., 6 spline, hardened tip. Spindle feed: 4¼". Variable speeds. *Includes:* ½" Jacobs key chuck. Fence.

5. SHOPSMITH AS HORIZONTAL DRILL PRESS



For the first time in the power tool field, *SHOPSMITH* makes available a horizontal drill press. Has 14½" x 17" table; extends to 34½" x 17". Provides accurate method of drilling for doweling. And the only limit to length of work is size of your shop. *Includes:* ½" Jacobs key chuck. Mitre gauge. Table extension. *SHOPSMITH is also convertible to grinder, buffer, router, drum sander, shaper, scratch brusher.*

MODERN... and a cinch to build with EASI-BILD* Full-Size Patterns!

You can build this bookcase for less than half the store cost. New, full-size patterns, step-by-step directions, and assembly illustrations make it easy. Use *Cascamite* Resin Glue, described below, for strong, stainfree joints throughout.

*Trade-Mark © 1948, Easi-Bild Pattern Co.

How to choose a glue!

Follow these directions and you'll solve all your gluing problems:

For boats, outdoor furniture, sports equipment—joints that must withstand outdoor exposure—*CASCOPHEN* (Resorcin Resin Glue). The first completely durable glue available to home-craftsmen.

For furniture, toys, heavy-duty home repairs—strong, stainfree, moldproof, highly water-resistant *CASCAMITE* (Urea Resin Glue). Mixes quickly with cold water!

For models, photo prints, labeling—general home, school, or office gluing, use the new, clean, white fast-setting *CASCOREZ* (Polyvinyl Resin Glue). Liquid, ready to use!

SEND COUPON FOR BOOKCASE PATTERN TO:

Casco Pattern Dept. PS-98
P. O. Box 215, Pleasantville, N. Y.

Enclosed is .....¢ for material checked below
( ) Bookcase, Pattern #42—50¢
( ) 32-page Pattern Book, illustrating 94 projects—20¢

Name_____

Address_____

City_____ Zone____ State____

THE BORDEN CO. • CHEMICAL DIVISION
Makers of Casco Glues

NOW YOU CAN DRILL YOUR OWN WELLS!

Sturdily Made—Hundreds of satisfied customers. Purchased and used by U.S. Dept. of Agriculture, U.S. Dept. of Forestry, U.S. Navy and many foreign countries.

Fully Guaranteed
Price Complete
$385.00
Less Motor
F.O.B. Factory

Price includes drill, bailer and 100' cable. 200 ft. of additional length available at extra cost.

Drill your own wells for that needed water—as many as you need—outside—in the cellar—in the barn. The new improved CONSOL Driller—1948 Model—is equipped with a special replaceable Drill Head. It will drill through many feet of solid rock without resharpening. Simple to operate, easy to set up. Do the work yourself at small cost.

We offer ¾ H.P. Electric Motor or 1½ H.P. Gas Engine to operate the "CONSOL" Well Driller at 38 strokes per minute.

Write for free illustrated booklet.
Dept. PS

CONSOLIDATED INDUSTRIES
West Cheshire, Conn.

MUFFLERS
STEELS and ALUMINUMS with a motorboat tone

SINGLES, Chev., V-8, Plymouth, Steels $5.50, Aluminum $7.00. Chry., Olds., Buicks, etc., Steels $7.50, Aluminum $9.00. V-8 and MERCURY DUALS, Steel $17.50, Aluminum $21.00. Split Manifold Sets, Steels $35.00, Aluminum $45.00. Aluminums are guaranteed for life of your car.

SANDEE MUFFLER CO.
BOX 296 LA TIJ LOS ANGELES 43 CALIF
2624 W SLAUSON AVE LOS ANGELES CALIF

IT STAYS STUCK!

WITH... MULTI-PURPOSE AMBROID

If you want permanent results from an adhesive, you can't equal multi-purpose Ambroid liquid cement—for home workshop, household or factory. A quality leader for 37 years, ready-to-use Ambroid is waterproof, transparent, quick-drying, extra strong. Flexible, heat-and corrosion-resistant. For assembling, repairing or mending jobs, keep Ambroid handy. At your dealer's, or send 25¢ for big 2-oz. tube postpaid. Money back guarantee.

Also 50¢ 4-oz. tube. Pts., qts., gals., for industrial use.

AMBROID

306 Franklin St., Boston 10, Mass.

"THERE YOU ARE MA'AM...YOU'LL GET

BIG FUEL SAVINGS

AND REAL COMFORT THIS WINTER!"

Save Money With "Midget" Pilot!

The "Multi-Heat" burner with its "Midget" Pilot is an exclusive Perfection design . . . it's a tiny pilot burner within the main burner. Uses fuel "by the drop". No other burner matches its low consumption.

More Heat Per Gallon With Perfection's "Heat Extractor".

Heat that would otherwise flit up the chimney is caught by the "Heat Extractor" and directed roomward. Adds to your comfort! Saves fuel by getting the most possible value from each gallon!

Completely Automatic! Relax in Comfort!

No need to jump and adjust the fire for every weather change. A new Perfection Heater with Perfection's thermostatic controls automatically cuts fire back from high or low to money-saving pilot when rooms are warm . . . returns to higher fire when needed.

"Floor-Flo" Blower!
Warmth Where You Need It!

Perfection's "Floor-Flo" blower gives better circulation of warm air into far corners. It pours cozy heat across the floor, helps keep the most heat where you need it. Not merely a fan. Quiet as a summer breeze!

THE *new* PERFECTION *Oil Heater* "MORE-COMFORT-PER-GALLON"

PERFECTION STOVE COMPANY, 7037-B Platt Ave., Cleveland 4, Ohio

Manufacturers of Oil Ranges and Cook Stoves, Oil Heaters, Oil Water Heaters, Oil and Gas Winter Air-Conditioning Furnaces.

ATLANTA • CLEVELAND • CHICAGO • JERSEY CITY • KANSAS CITY • OAKLAND • ST. PAUL

Make More $$$ With Alternating Current Welding. Do arc welding anyplace with this portable gas engine drive A.C. Arc Welder. In the shop or in the field you'll find more welding advantages in this newly developed rotary A.C. Ideal in the field where electric power is not available, especially for inert-gas-shielded arc welding requiring A.C. for hard to weld metals.

Electric Drive

Save More $$$ With Alternating Current Power. This same machine is converted, by simply flipping a switch, to a portable Alternating Current Power Unit to furnish lights and power to operate electrical tools and equipment. A real value in case of normal power failure—prevents loss of production time, makes you independent of power supply.

Build Your Own

You Can "Build Your Own" Or Buy Complete. You can buy this unit as a generator only for connecting to your own power source or you can buy it complete, ready to go to work. Either way you get a combination alternating current arc welder and alternating current power unit. Two machines built into one and for a little more than the price of one. Return coupon today for information on this revolutionary new machine. It can make and save you many $$$.

AC Welder

HOBART BROTHERS CO., Box P-98, Troy, Ohio

Hobart one of the world's largest builders of arc welders

Hobart Trade School

Yes... I want to know more about...

FREE! Vest Pocket Guide. ☐

—the new Hobart A.C. Arc Welder and A.C. Power Unit Combination. Send information on items checked:

☐ A.C. Welder-A.C. Power ☐ Industrial A.C. Welder
☐ Build Your Own D.C. Welder ☐ Shop Type A.C. Welder
☐ Shaft Extension Electric Drive ☐ Hobart Trade School

Hobart Brothers Company, Box P-98, Troy, Ohio

Name _____

Address _____

City _____ State _____

SURPLUS SPUR GEAR HAND HOIST

LIFTS, as a hoist...or pulls, as a winch. Hundreds of uses for this converted bomb hoist. Made by famous manufacturer for Uncle Sam . . . Brand new, unused.

Easily lifts or pulls up to 350 pounds. 18 ft. of multi-strand wire rope can be fed out of any one of three drum housing openings.

Rig it up yourself on wall, beam, tripod or trolley, wherever you want to lift or pull heavy or bulky loads, such as boats, outboards, stock . . . anything too heavy to handle. Free illustrated "How To Use It" suggestions.

STATIONARY TYPE
(For Fixed Location as Shown)

$9.95 ea.

PORTABLE TYPE
(With Overhead Hook)

$12.85 ea.

Postpaid in U.S.A.

Dealer Inquiries Invited

IRELAND & VICE, P. O. Box 146-P, Auburn, N. Y.

SHEETMETAL FORMING TOOLS

30" BRAKE. Forms angles, channels, vees, flanges, locks, zees. Handles 26 gage sheet steel, heavier gages of aluminum, copper, plastic, etc. Portable. Can be held in a bench vise, or bolted down. All steel. Wt. 40 lbs. Shipped exp. collect. **$24.50**

12" BRAKE. Fits in vise to form difficult and compound bends, up to 20 gage steel 12" wide. **$12.50. PF 18" CURVE FORMER.** Handles 16 gage steel 2" to 30" dia., **$9.50. SHEAR** Cuts 16 gage steel any length and width. **$18.50. VISE IRON BENDER.** Forms rings, hooks, eyelets, etc. In ½" round or square; ¼" up to 2" wide in bar iron. Price $10.00 PP., with attachment to bend ½" pipe, $12.50.

SHEET METAL PLIERS, 2½" wide, $2.00; 5" wide, $3.50. 20 page instruction booklet, 50c.

Immediate delivery. Order direct, cash or C.O.D., or send for folder.

VISE BRAKE MFG. CO., 1116 So. 27th St., Dept. S9, Omaha 5, Nebr.

PAINTERS' STRIPING TOOL

NOW you can do your own expert striping on furniture, bikes, model planes, bulletins, autos, toys, signs, linoleum, wall board . . . make plain walls look like tile! It's easy to paint straight, curved, circular, even parallel lines with any color. Handiest paint tool in your workshop! Type "M" Master Painters' Striping Tool complete with tip for 1/16" stripe $1.00. Tool with choice of 1/64", 1/32", 3/64", 1/64", 3/32", 1/8"—$1.50 . . . all tips 75c ea. Tool with complete set of 7 tips $3.00. (COD's postage collect.)

WENDELL MFG. CO., 4234—A Lincoln Ave., Chicago 18, Ill.

Write your own Ticket to Endless Fun with a

HARLEY-DAVIDSON

Want adventure? Like thrills? Eager to go places and see things? Then join the thousands who have found happier, healthier outdoor enjoyment, new friends, and endless fun in motorcycling . . . world's greatest sport! Every trip is delightfully different, every moment memorable, as you take in exciting race meets, endurance runs, hillclimbs . . . go on gypsy tours and sightseeing trips. Get your share of these wonderful times now. See your Harley-Davidson dealer today.

MAIL THIS COUPON NOW! MAIL THIS COUPON NOW!

HARLEY-DAVIDSON MOTOR CO., Dept. PS, Milwaukee 1, Wisconsin

Send free copy of ENTHUSIAST magazine filled with motorcycle action pictures and stories; also literature on latest models.

Name.....

Address.....

City..... Zone..... State.....

How to Save Over $100

Yet Own as Fine a Hearing Aid as Money Can Buy! See Coupon Below

HEAR BETTER OR PAY NOTHING! Wear the New Zenith "75" at home, at work, anywhere. If it isn't better than you ever dreamed ANY hearing aid could be, return it within 10 days of receipt and Zenith will refund your money in full.

This superb quality hearing aid is yours for only $75 because . . . 1. It's produced by Zenith, world's leader in radionic devices exclusively. 2. Its advanced principle eliminates expense of "fitting" and excessive sales commissions that would make its price $195, instead of $75. You save over $100.

Instantly Adjustable—by You. This advanced principle (recently confirmed in U.S. Government-sponsored research at Harvard University) lets *you* instantly adjust the Zenith "75" for *your* best hearing. That's why it comes to you by mail—all ready to use at home, office, church, theater.

Lowest Operating Cost, Too! Actual tests prove the *new* Zenith "75" costs less to operate (¾ of a cent per hour battery cost) than *any* other single-unit hearing aid of equal power! So mail the coupon—as tens of thousands have done—and find new happiness, success. Check coupon if you wish details of our time payment plans.

NEW ZENITH RADIONIC HEARING AID

BY THE MAKERS OF ZENITH RADIOS

ACCEPTED COUNCIL ON PHYSICAL MEDICINE AMERICAN MEDICAL ASSOCIATION

Look only to your doctor for advice on your ears and hearing

ORDER NOW. MAIL THIS COUPON

Zenith Radio Corporation
Hearing Aid Division, Dept. PS98
5801 Dickens Avenue, Chicago 39, Illinois

☐ I enclose check or money order for $75* for one Zenith "75" Hearing Aid. Unless I am completely satisfied and find the Zenith "75" superior to *any* other hearing aid, I may return it within ten days of receipt and get my money back in full.
**Plus tax of $1.50 if delivery is made in Illinois.*

☐ Please send details of your convenient time payment plans, and send free descriptive literature.

Name.....

Address.....

City.....*State*.....

IMMEDIATE DELIVERY!

Complete as shown

$24.95

F. O. B. ROYERSFORD, PA.

8½" BENCH SAW

CUTS THROUGH 2 5/16"

UNCONDITIONALLY GUARANTEED ONE YEAR

Comes complete with Floating motor mount—miter gauge with adjustable stop—aluminum guard—soft aluminum insert—spring steel splitter—heavy gray iron fence—(no motor—no blade). Table 12" x 14". Tilts to 45°—Oilite bearings. Shipping Wt. 48 lbs.

AMERICAN MACHINE & TOOL CO. Inc.

DEPT. 200 **ROYERSFORD, PA.**

WRITE FOR FREE BOOKLET AND GUARANTEE BOND

PULVEX FLEA POWDER

TWO KINDS

WITH 5% DDT
. . . for dogs. Kills fleas and lice quick. Keeps fleas off 5-7 days. Many home uses.

OR WITH ROTENONE
. . . for cats, dogs. Quickly kills fleas, lice. Kills fleas when put on a single spot. Pre-war formula.

EITHER KIND: 25c & 50c

Guaranteed by Good Housekeeping

"Paint-it-Yourself" with **NU-ENAMEL**

ONE COAT COVERS NO BRUSH MARKS

NU-ENAMEL DEALERS EVERYWHERE

DIE-LESS DUPLICATING

Many small parts can be formed without dies, to duplicated accuracy of .001" with DI-ACRO Precision Machines. — Benders, Brakes, Shears. Save die expense and time delay. Ideal for experimental and research work, making samples, models, etc. as well as regular production runs. Write for descriptive literature.

O'NEIL-IRWIN MFG. COMPANY
342 8th Ave., Lake City, Minn.

Ingenious New
Technical Methods
To Help You Increase Efficiency

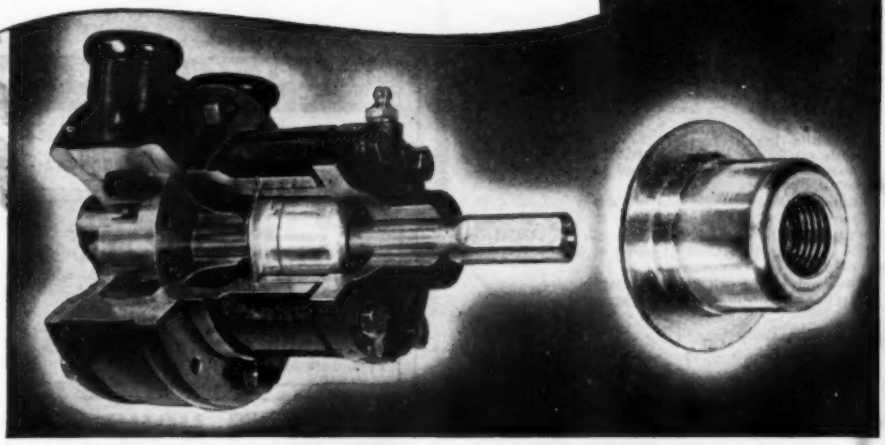

New Cartridge Seal Solves Rotating Shaft Sealing Problems

Stepped-up efficiency in sealing of rotating shafts can now be accomplished with a new Cartridge-type Seal mounted on the shaft.

The Cartridge-type Seal shown above is mounted within a Tuthill Pump. The seal contains all parts in one housing cup and insures positive double sealing. A high grade permanent lubricant is contained within the inside chamber of the housing.

Surfaces within the Cartridge-type Seal are lapped flat to within a few millionths of an inch to insure perfect mating. And, being a complete unit, only one mounting face is necessary. Clamps are eliminated, and adjustments or alignments are not required. Simply push the Cartridge-type Seal onto the shaft, tighten mounting screws and that's all.



Cartridge-type Seal

Just as new engineering developments increase efficiency and performance, so can workers' efficiency be increased through the use of chewing gum. The act of chewing helps relieve nervous tension, thus helping to make the work go smoother and easier. That's why plant owners everywhere more and more are making Wrigley's Spearmint Chewing Gum available to all.

Complete information may be obtained from
Cartriseal Corporation
200 No. Laflin Street Chicago 7, Illinois

AC-74

No Sweat! No Fatigue! No Blisters!

One-Hand Electric GUILD SAW

5 to 10 times faster than hand sawing!

Weighs only 6¾ lbs.!

IN three short words: It's a beauty! In the home, on the farm, in the workshop . . . even for maintenance and crating work . . . you can use the Guild Saw on all kinds of wood . . . in any position . . . save yourself hours of hard, backbreaking work.

Versatile—It rips, cross-cuts, bevels and mitres. Cuts wide circles on panels, plywood and composition board. Cuts tenons, notches and grooves. Excellent for dadoing.

Raises and lowers—Simple adjustment permits cuts varying in depth from a scratch to 1¼".

Tilts—For bevel cuts, you can tilt the Guild Saw up to 45°. Cuts 1" deep at full bevel of 45°.

Guaranteed for all time against imperfections of workmanship and materials.

Costs Only $49.50*

Model A-2 Electric Sander

EASIER Sanding 10 Times Faster!

Practically pays for itself in just a few sanding jobs!

WHY wear your skin down with tough, hand-sanding drudgery? The sturdy A-2 Belt Sander actually does hours of smooth, expert sanding in minutes.

Versatile—Sands both flat and curved surfaces on wood, plastics, metal and stone. Does re-finishing of furniture, and clean-up work. Removes old paint and varnish. Smooths down glued joints. Produces beautiful, smooth finish in a truly professional manner.

Adaptable—You can use the A-2 in a vertical, horizontal, or overhead position. Even operates on its sides or clamped in a vise.

Light and sturdy—Weighs only 9 lbs. Powerful motor speeds belt at 600 surface feet per minute. Overall size is 4" x 12" x 6". Belt is 2" x 21" . . . and can be changed almost instantly.

Costs Only $57.00*

Write today for more detailed information about these two time-saving . . . work-saving Porter-Cable machines. No charge or obligation. Porter-Cable Machine Co., 1902-9 N. Salina St., Syracuse 8, New York.

*Price subject to change without notice.

PORTER-CABLE MACHINE CO.
1902-9 N. Salina St. Syracuse 8, N. Y.

Do a Better Job WITH ONE OF THESE EMPIRE LEVELS

EMPIRE TORPEDO LEVEL

Smallest, most handy and accurate Level made. "Cigar-shaped"—no sharp corners to tear pocket. Aluminum stock. Only 3 oz. wgt. 9" long. Has Level, Plumb, 45° Vials. No. 26 ..... $2.00

ALUMINUM LEVEL — No. 151

Cast and Machined, a Beautiful Tool, with Patented, Removable Level and Vial.
With 2 Plumb, 2 Levels, 2 — 45° Vials. 18" $6.00
24" ..... $6.50 28" $7.00

Order EMPIRE LEVELS from your local dealer. Write direct for literature.

EMPIRE LEVEL MFG. CO.
Box 97, Dept. 707 • Milwaukee 13, Wis.

Engineers All Metal Army Type Hand-Sighting LEVELS

$2.00 PRECISION QUALITY

WHEATSTONE BRIDGES

Portable. Used, in excellent condition. Manufactured by Thompson Lever Mfg. Co., Philadelphia. Value $150.00. **Special** $49.50

Send 25c for catalog of new and used guns, ammunition, binoculars and powder flasks.

PUBLIC SPORT SHOPS
11 S. 16th St., Phila. 2, Pa. No COD's

NOW! FILE YOUR OWN SAWS

Do expert saw filing at home. Precision filing easy without experience. Two simple adjustments. Keeps any hand saw extra sharp and true-cutting. Complete with file. Money back guarantee. Cash with order, prepaid, (COD postage extra.) Order today.

THE SPEED CORP., Dept. PS
2025 N. E. Sandy, Portland 12, Oregon

LAW

STUDY AT HOME for Personal Success and LARGER EARNINGS. 39 years expert instruction—over 114,000 students enrolled. LL.B. Degree awarded. All text material furnished. Easy payment plan. Send for FREE BOOK NOW—"Law and Executive Guidance."

AMERICAN EXTENSION SCHOOL OF LAW
Dept. 93-PS, 646 N. Michigan Ave., Chicago 11, Ill.

ASSEMBLE YOUR OWN BOAT

FROM PRE-CUT "PACKAGED BOAT" KITS

Save 50% — Build from our complete, easy-to-assemble Plywood Kits. 16 Models to choose from, all parts pre-cut, frames pre-assembled. Finest designs (8 to 18 ft.)—Exclusive features—Outstanding performance. $34.50 up.

Send 25c (coin) for illustrated literature.

MARINE MART, BUFFALO 7-A, NEW YORK

Snap-on Bench Grinders

With the famous Blue-Point Trade Mark

...have the construction features that guarantee smoother, more powerful operation

GRINDING WHEELS of natural aluminous oxide abrasive . . . fully vitrified. From 60 grit for fine grinding to 24 grit for heavy work.



WIRE WHEEL BRUSHES High quality wire and metal, bound to prevent chips flying loose. Crimped bristles cannot bend or break.

WHEEL DRESSER Quickly trues, cleans grinding wheels. Protective hood over cutters. Includes extra set of easily inserted cutter wheels.



EYE SHIELDS Thick safety glass for clear vision, protection. Sturdy aluminum frame. Easily attached to grinder.

COMPLETELY ENCLOSED MOTOR: Super powered, precision balanced motors enclosed to prevent dirt, grit, etc. from entering.

BALL BEARING CONSTRUCTION: Oversize grease sealed ball bearings used throughout, assure smooth, motor operation.

LARGE RUGGED BASE: Rubber feet provides solid mounting free from vibration. Recessed bolt openings for permanent mounting.

INDUCTION RUN MOTOR: Develops less heat in the windings — more desirable for continuous operation.

LARGE WHEEL GUARDS: Allow use of special shape grinding wheels or wire brushes. Guards fitted with chip breakers.

BELL TYPE CONSTRUCTION: Provides full clearance so that long straight pieces may be ground across the face of the machine.

STURDY TOOL RESTS: Adjustable for any type of work with ample take-up for wheel wear.

CAPACITOR START MOTOR: Uses low starting current . . . actually less than 15 amps. is consumed.

VOLTAGE: Standard models of the 1/3 H.P. and ½ H.P. grinder require 110 Volts, 50/60 cycle AC current. Standard 1 H.P. grinder takes 220 Volts, 50 or 60 cycle AC current.

SNAP-ON TOOLS CORPORATION

8060-I 28th AVENUE • KENOSHA, WISCONSIN

International Division: Kenosha, Wis., U. S. A.

SNAP-ON TOOLS CORPORATION
8060-I 28th Ave., Kenosha, Wisconsin
Please send me more details about Bench Grinder and accessories.

Name.....
Position.....
Company.....
Address.....
City.....(.....) State.....

Shave with extra ease... save money, too

STROPS—CLEANS WITHOUT REMOVING BLADE

RAZOR, STROP AND 5 VALET BLADES $1.25

SELF-SHARPENING . . . ONE PIECE

BUILD and ENJOY YOUR OWN BOAT!

ASSEMBLED IN 8 HOURS

WITH A

Plywood Boat Kit

ONLY $54.00 Freight paid

LIGHTWEIGHT, 12 FEET LONG.

READY CUT—needs no forms nor special tools to assemble. Kit includes all hardware, paint, etc. (less oars). *Send for Free Folder.*

TAFT MARINE WOODCRAFT
Dept. N, 636 39th Ave. N.E., Minneapolis 18, Minn.

Save Time and Money with this Press

Ten-ton press, ideal for all kinds of pressing, separating, straightening, and bending jobs. Ample capacity for home shops. Easily adjustable table takes work up to 18 inches wide and 11½ inches high. Roller-bearing ram for long life. Send for free bulletin showing press and wide variety of accessories.

UT-10A Press f.o.b. factory $31.00

DAKE ENGINE COMPANY
622 Seventh Street, Grand Haven, Michigan

USE YOUR BENCH SAW FOR JOINTING & CUTTING MOULDINGS



With our six inch tool steel cutters make mouldings, casings, drop-leaf tables, grooves beading and jointing. Moulding cutters, A 1 in. wide $1.50. 1½ in. $2.00. Jointing cutters, B 1 in. $1.50. 1½ in. $2.00. E 1 in. for drop-leaf tables, $1.50. E 1½ in. Makes ¾ in. cove & Quarter. $2.00. Postpaid. Guaranteed. State size hole. List & Folder free.

JOHN A. SANDSTROM
Rt. 1-P, Clearwater, Fla.

OWN A Printing Business

Cards, Tickets, Stationery, etc. Good profit in spare time. PRINT YOUR OWN greeting cards, movie titles, church work, etc. Save money. Easy rules supplied. Raised printing like engraving too. Have home shop. Sold direct from factory only. Send dime for supply book, suggested outfits, all details and advice on your needs. No obligation. KELSEY, INC. C-33, MERIDEN, CONN.

WRITE FOR YOUR FREE COPY OF THE NEW KRW HYDRAULIC PRESS BOOK

Describes all manner of Production and Shop Work on KRW Hydraulic and Bench Type Arbor Presses. 32 pages illustrating the new KRW Hand-operated, Electric-operated and Air-operated Hydraulic Presses. *Write for your copy today.*



K. R. WILSON, DEPT. 54, 215 MAIN ST., BUFFALO 3, N. Y.

Weld Cast Iron this Easy Way

Use P&H Nicast electrodes — and get sound, fully machinable welds

Nicast is ideal for making quick, easy repairs in cast iron, reclaiming cast-iron parts, and correcting machining errors

These cast-iron arc-welding jobs are easier to do and cost less when you use P&H Nicast Welding electrodes:

- Iron casting repairs
- Building up worn castings
- Welding cast iron to steel
- Correcting machining errors on castings
- Maintenance work for industrial plants
- Automotive repairs:
  - Cylinder blocks
  - Cylinder heads
  - Transmission housings
  - Clutch-plate fingers, etc.

P&H Dial-lectric AC Welder with built-in remote control. Sizes to 650 amps.

Yes, welding cast iron is easy when you use P&H Nicast electrodes. Why? Because Nicast operates in a low heat range — no preheating, no postheating, no other time-consuming preparation is required. And, too, you can weld with Nicast in any position — flat, vertical, overhead, horizontal.

Here's why Nicast welds are easy to machine

The steady, soft arc produced by Nicast has just the right amount of penetration. This feature, with the low amperage required, prevents dilution of carbon from the parent metal to the fusion zone and to the weld metal deposited. This absence of diamond-hard carbon particles is what makes Nicast easier to machine than other electrodes.

There is no hard fusion zone to drill, tap, mill, or machine. Tools and cutters stay sharp longer, break less often. Your work is finished in less time. And you make more profit on every cast-iron repair job you do with Nicast.

Nicast welds are sound

After machining or grinding, Nicast welds almost match the color of the parent metal. But more important, they are non-porous and free from cracks. Prove this to yourself by checking a multiple-pass Nicast weld under hydrostatic pressure.

Nicast can be used on any type of welder

This versatile P&H electrode operates equally well on AC or DC current. You can use it to reduce welding time and save money, no matter what type of welding machine you have.

And speaking of welding machines, we suggest that you get all the facts about the new P&H AC Arc Welder. *This is the only welder with easy-to-use Dial-lectric Control.* It has no moving parts and needs no maintenance.

Connectible to 220-or 440-volt current, the P&H Dial-lectric has many features that help to reduce welding costs. Here are a few that make for better, faster welding: Built-in remote control. Easy quick-start arc. High-low welding range. Elimination of arc blow. A three-quarter turn of radio-like knob for complete welding range. Compact design. Sizes range up to 650 amps.

Go after profitable cast-iron welding jobs. Your nearby P&H distributor can supply you with Nicast electrodes — the electrodes especially designed to do cast-iron work faster and better. Nicast is available in 1/16, 5/32, 1/8, and 3/32 sizes and comes in handy 10-lb. containers. See your P&H distributor today or mail us the coupon below, clipped to your business letterhead.

P&H HARNISCHFEGER CORPORATION
WELDING ELECTRODES
4674 W. National Ave.
Milwaukee 14, Wisconsin

Manufacturers of America's Most Complete Arc Welding Service

TEAR OUT COUPON. ATTACH TO YOUR BUSINESS LETTERHEAD AND MAIL TODAY

HARNISCHFEGER CORPORATION
4674 W. National Avenue, Milwaukee 14, Wisconsin

Yes, I'm interested in welding cast iron the easy way with P&H Nicast electrodes, and in the new P&H AC Arc Welder with revolutionary Dial-lectric Control. I would like information on the items that I have checked below:

☐ P&H Nicast Electrodes ☐ P&H AC Arc Welders
☐ Send representative ☐ Send address of distributor
☐ Send Free Book, "Simplified Welding"

Name.....

Position.....Company.....

Address..... ☐ Home ☐ Business

City.....( ) State.....

The bike that is really different! Super Streamlined air-flow design . . . new "Air-Wing" head shield . . . new mar-proof and chip resistant finish . . . and dozens of other exciting new features. For sale by better stores everywhere.

MONARK SILVER KING, INC., Department B-83
6501 W. Grand Ave., Chicago 35, Illinois
Send free folder showing complete line in full color.

Name _____

Address _____

City _____ State _____

New BRUSH Electroplater

ESPECIALLY BUILT FOR MECHANICS, MODEL MAKERS HOME CRAFTSMEN

Easy to Plate GOLD, SILVER, NICKEL, COPPER, etc... *For Pleasure and Profit!*

If you have a workshop—at home or in business—you need this new Warner Electroplater. At the stroke of an electrified brush, you can electroplate models and projects—you can replate worn articles, faucets, tools, fixtures, silverware, etc. with a durable, sparkling coat of metal... Gold, Silver, Nickel, Copper, Cadmium, *and after a bit of practice,* even Chromium! Everything furnished—equipment complete, ready for use. *By doing a bit of work for others, your machine can soon pay for itself.* So make your shop complete by getting a Warner Electroplater right away. Send today for FREE PLATING SAMPLE and illustrated literature. ACT AT ONCE.

WARNER ELECTRIC CO., Inc., Dept. T-18
1512 Jarvis Ave., Chicago 26, Illinois

FREE *Details & Sample!*

WARNER ELECTRIC CO., Inc., 1512 Jarvis Ave., Chicago 26, Illinois, Dept. T-18
Gentlemen: Send Free Sample and Details to:

Name _____

Address _____

City _____ *State* _____

Stucco Spraying
· Today's Outstanding Business Opportunity

Beauty and protection are sprayed on old and new buildings . . . exterior and interior surfaces . . . by COLORCRETE. It's a plastic, water-resistant material, spread evenly over surfaces and forced into cracks by air pressure. Fuses to masonry with enduring tenacity. Many textures. Range of 30 smart colors. Fully proven by 20 years of actual use under all conditions.

BIG EARNINGS FOR COLORCRETORS

Colorcrete ties in with today's huge building program. Renews old buildings. Makes new construction more attractive and enduring. Large waiting market, because building owners get long lasting beauty and protective values at low price. Yet your selling price can be several times your basic cost. Machine is easy to operate. Moderate investment. Write or wire for complete information.

COLORCRETE INDUSTRIES, INC.
572 Ottawa Avenue Holland, Michigan

COLORCRETE

Get This New TEMPLATE CATALOG *Free!*

Rapidesign Time-Saver Templates for engineers, draftsmen, architects, designers, office, store and factory layout.

Write for FREE catalog No. 48 to

RAPIDESIGN, INC.
Dept. PSM 98 Box 592, Glendale, Calif.

How to make Liquid Marble

Make amazing Liquid Synthetic Marble at home in your kitchen, basement or garage. Terrific demand! BIG PROFIT! No heat, pressure or machinery needed. No experience necessary. MOLD, TROWEL or BRUSH—make in almost any color.

FLEXIBLE MOLDS: Valuable information for novelty casting. 3c material makes $1.00 item. PERMA-TEX Plastic Flooring: Make lifetime floors in any color or shade. Can be laid over wood, concrete, brick, etc. Work out beautiful patterns in contrasting and harmonious colors.

WRITE FOR FREE CATALOG!

BING PRODUCTS Dept. PS-9B, 88 Broad St., Boston 10, Mass.

ELECTRICITY *Anywhere*

● Onan gasoline-engine-driven Electric Plants supply reliable, economical electric service for any use. Portable, stationary or stand-by models. Water or air-cooled, compact and rugged.

A.C.: 350 to 35,000 watts in all standard voltages and frequencies. D.C.: 600 to 15,000 watts. 115 and 230 volts. BATTERY CHARGERS: 500 to 3,500 watts: 6, 12, 24, 32 volts.

Write for folder

D. W. ONAN & SONS INC.
2787 Royalston Ave., Minneapolis 5, Minn.

Onan PRODUCTS

"Here's the .22 for Me"...

says famous Maine Guide

"This 765 can't be beat . . a real friend on a hunting trip . . ."

"Pioneer"

It's a full size he-man rifle . . . more features than any other single shot bolt action .22. Streamlined for fast, safe, accurate shooting. Look at these special and exclusive features . . .

MODEL **765**

ONLY **$13.50**



At right, top . . . Exclusive H&R "Red Devil" hooded sight. Middle . . . Exclusive H&R "Redi-Feed" drop-in loading platform. Bottom . . . Special H&R self-cocking; side thumb-safety; live cartridge ejection; streamlined full size bolt and bolt handle.

Write for folder or see your dealer

HARRINGTON & RICHARDSON ARMS CO

356 PARK AVENUE, WORCESTER 2, MASS.

Live in a House?

This light, strong, easily handled device—weight-tested to 500 pounds—will let you *Wash—Paint—Putty Your Windows—Hang Screens* and *Awnings—Service Combination Storm Windows without a Ladder!* Protective steel railing—wide substantial floor—rubber house protectors. Model H adjustable to all household wall thicknesses—9" to 17". $9.85 C.O.D. plus fee. $10.50 postpaid. Add $1.00 west of Rockies. Money back guarantee. Pat. pend. A Morsafe* Product. Agents, Dealers, Territories Open. *T.M.

THEN YOU NEED A WindoStep*

FOR ALL OUTSIDE WINDOW WORK ...UPSTAIRS OR DOWN

An Ideal Gift

MORRISON CRAFTERS
765 Miami Street, Toledo 5, Ohio

NAME _____

ADDRESS _____

CITY _____ STATE _____

C.O.D. ☐ PREPAID ☐

PS-9 SEND CIRCULAR ☐

NEW *Electric* SANDER

Amazing MOTO-SANDER AND POLISHER

Saves Time—Saves Effort! Dremel has developed a combination **electric** Sander and Polisher for home or shop . . . so easy to handle that a child can use it. New, inexpensive **"Moto-Sander"** delivers about 7,200 strokes a minute. Because of its high speed and fast, reciprocating action, **Moto-Sander** does a magically smooth job of sanding . . . gets into places other sanders can't reach. Rubber cushioned sanding pad measures 2¼" x 5½". Cam-type-clamp paper holder permits changing sandpaper in seconds. **Moto-Sander** has only two moving parts . . . never needs oiling or adjustment . . . weighs only 2¼ lbs. Uses 110-120 volt, 60 cycle A.C. electric current (only). Gives no radio interference. Comes with 8 ft. (Underwriters' Approved) rubber cord plus 6 sheets assorted grade Garnet paper, plus ⅛" thick **felt pad** and **sheepskin** for wax polishing.

EASY FOR AWKWARD PLACES

SANDS FLAT SURFACES EVENLY

GETS INTO TIGHT CORNERS

ROUNDS CORNERS LIKE MAGIC

Fine Finishes—Fast!

Use **Moto-Sander** to get satin smooth finish on woodwork, stairways, doors, furniture; ideal for sanding boats, painted walls, bird houses or scale models. Just guide it. Uses 2/0 Garnet paper or finer. For speedy, effortless **polishing** of waxed furniture, automobiles and other surfaces, use felt pad or sheepskin (furnished) in place of sanding paper. **Moto-Sander** is the lightest, most practical electric sander on the market—**the only one of its kind, and is patented.**

MONEY-BACK GUARANTEE: If your dealer does not yet have **Moto-Sander,** send only $14.85 . . . we'll pay postage. Or send $2 now, and pay postman balance plus postage. Money back if not delighted after 5 days' trial.

DREMEL MANUFACTURING CO.
Dept. 128-J Racine, Wis.

1500 MILES for $9.20

All-Steel Crosley Station Wagon seats 4, or 2 with ¼ ton load. Priced $600 to $700 less than any other station wagon, costs about ⅓ as much to run. Typical owner's report:

Robert T. Knight, 2157 W. Warne, St. Louis, Mo., drove his Crosley 1500 miles, averaged 40 miles per gallon of gasoline. Total cost, $9.20.

Four other smart Crosley models to choose from.

CROSLEY
a **FINE** *car*

For beautiful full-color catalog, write: Crosley Motors, Inc., 2532-JQ Spring Grove Ave., Cin'ti 14, Ohio

BOYS-IT'S FREE!

Exciting, new book tells about
"ATOMIC ENERGY"
and "THE WONDERS OF CHEMISTRY"

Also shows how to amaze friends with Chemcraft magic and do many exciting home experiments. Free. Send today!

THE PORTER CHEMICAL CO. 57 Prospect Ave., Hagerstown, Md.

LAWN ORNAMENT-NOVELTY PATTERNS

28 Lawn Ornament Patterns, 25c. Other patterns: 15-20" high; Dutch Girl, Dutch Boy, Pirate, Bull Terrier, Mexican Girl, Mexican Boy, Dwarf, Penguin, Flower Girl, 10c each. 25 Novelty Patterns, 30c. **All 62 Full Size Patterns, $1.00 Postpaid.**
Strether Pattern Service, Dept. 7-AK, Box 383, Belington, W. Va.

GRIND TOOL BITS ON YOUR LATHE

A simple, versatile, fast-adjustable holder for every home work-shop. Makes precision tool bit grinding possible, increases capacity of your lathe, permits you to do things heretofore thought too large for present set up. Facilitates edge turning and grooving. At your dealer or order direct. Introductory price postpaid **$2.65**

HURON FACTORY SERVICE CO.
505 Lafayette Bldg. Dept. 11 Detroit 26, Mich.

Electrically Welded Endless *Paramount* BAND SAW BLADES



Made in widths from 1/8" to 1-3/4"

Make your band saw do more work for you. The proper width of blade will extend the scope of this important machine. Burrill's Paramount Blades are made from tough Nickel Alloy Steel properly tempered. Teeth accurately set and filed, and all saws carefully straightened. Send order and check today. Delivery will be made as promptly as conditions permit, from a few days to a week or two. You can obtain these saws at the following prices:

⅛"-3/16"-¼"-⅜" wide, 5'6" long.....$1.04 each
⅛"-3/16"-¼"-⅜" wide, 6'6" long.....$1.16 each
⅛"-3/16"-¼"-⅜" wide, 7'6" long.....$1.27 each

Other sizes at proportional prices

NO C.O.D. SHIPMENTS ACCEPTED
State Make of Machine
Your satisfaction is guaranteed

BURRILL SAW & TOOL WORKS
405 E. Main St., Ilion, N.Y.

FINE TOOLS *NEED* FINE OIL!

• Lubricates
• Prevents Rust
• Cleans • Polishes

SOLD EVERYWHERE

3-IN-ONE *Oil*

GENSCO
SLOYD KNIVES & WOOD CHISELS

MADE IN SWEDEN

Sweden's toughest charcoal inlaid steel goes into these hand-honed, razor-sharp knives! They're ideal for wood, plastics, linoleum . . . for carving, carpentry, and general shop work. Curly birch, easy-grip handles. 6⅛", 6⅞", and 7 11/16" lengths.

Here's UNBEATABLE tool craftsmanship . . . Swedish charcoal steel tanged-butt wood chisels, individually heat-treated, tempered and honed! Blades have beveled edges for straight chipping and cutting. Curly birch handles. Sizes from ¼" to 2" wide.

MADE IN SWEDEN

See Your Hardware Dealer or Write:

GENSCO TOOL DIV.

General Steel Warehouse Co., Inc.
1830 N. Kostner Ave., Chicago 39, Ill.

MACHINE SHOP EQUIPMENT

• The 1949 edition of the famous Center Tool Co. Catalog is now ready! Every workshop owner should have a copy. 240 pages full of illustrations, descriptions, and prices of the latest tools made by best known manufacturers in U.S. You pay the cost of printing —50c. ***We refund your 50c with your first order of $10.00 or more*** Prompt delivery on most tools. Send check or money order today!

CENTER TOOL CO., 153 Centre Street, Dept. D, New York 13

L*M CARBIDE SCRIBER
NON-MAGNETIC

$2.00 PRICE POST PAID

Tungsten Carbide — carefully ground on diamond laps, brazed into stainless steel 6" handle for marking steel and other metals — for etching, marking, cutting glass. In plastic case with pocket clip.

PRICK PUNCH

Tungsten carbide tip, silver brazed into 3½" heat treated steel body. **with Carbide Tip . . . . $1.50** Price Post Paid

LUCAS-MILHAUPT ENGINEERING CO.
5051 SOUTH LAKE DRIVE • CUDAHY, WISCONSIN

COLOR FANS
say it's terrific

UNIVERSAL'S
MERCURY II
—the candid with single frame as used in Hollywood movie cameras. Coated f2.7 lens 82.90

"THE best color shots I've ever seen." . . . "Nothing can touch it for color . . . even the background is crisp and sharp." . . . "The best color camera, American or foreign, that I've used, regardless of price."

When experts . . . camera fans who have tried them all . . . write such glowing tributes to Universal's Mercury II, it must have something special!

It has! It has single frame design, the same miracle single frame that all Hollywood movie cameras use. Result: the lens is 30% closer to the film; depth of focus is unparalleled; you don't even need a range finder. At all reliable dealers.

UNIVERSAL CAMERA CORPORATION
New York, Chicago, Hollywood

NEW! UNIVERSAL'S **UNIFLEX**
"The expert's reflex." 17 expensive features. UNIFLEX I—Coated f4.5 viewing, f5.6 taking lens 55.00
UNIFLEX II—f3.8 viewing, f4.5 taking lens 75.00

NEW! UNIVERSAL'S **ROAMER**
More "good picture" features than any other folding camera.
ROAMER I — Coated, color corrected lens 29.75
ROAMER II — Coated f4.5 lens, speeds to 1/200th, 48.00

For Pictures that *Click*...click a *UNIVERSAL*

Perfect pictures

INDOORS, TOO!

Indoor pictures are easy when you use a WESTON. It gives you correct camera settings which assure perfect exposures indoors or out, with any type of camera, and all film. Used by amateurs and professionals everywhere. Available at leading photo dealers.

WESTON

EXPOSURE METER

The meter most photographers use

DIE HOLDER FOR LATHES

Mounts in tailstock spindle of lathe for holding 1-1/2 inch diameter button threading dies. Permits perfect alignment of die with workpiece to produce accurate threads. Die Holder precision-made from steel—shank accurately ground.

SOUTH BEND LATHE WORKS
456A E. Madison St., South Bend 22, Indiana

DIE HOLDER with
No. 2 Taper Shank . . $4.00
No. 3 Taper Shank . . $4.50

See your dealer—or sent direct postpaid.

SOUTH BEND

Pull the trigger and the iron heats itself!

QUIK-SHOT

SOLDERING IRON

Most amazing iron you ever saw!

NO Electricity!
NO Blowtorch!
NO Flame!

Needs NO EXTERNAL HEAT of any kind!

A small chemical cartridge supplies intense heat. Pull the trigger; the iron

HEATS ITSELF

Reaches working temperature in 5 seconds! Holds it 6 to 10 minutes. Peak wattage rating of 200. For large jobs or small. Interchangeable ⅜", ½", ⅞" tips. Lasts a lifetime. SAFE! No sparks or flames!



Open tip, insert cartridge, screw shut.

Pull spring rod "trigger" button on handle, and release.

Price with 1 Tip (Specify Size) and 4 Cartridges. Postpaid. 5.95
Additional Tip 1.50
Extra Cartridges 4 for .49

See Editorial Comment

KEMODE MFG. CO., Dept. B
2 W. 46th St., New York 19, N. Y.

SpeedWay



No. 117 portable bench grinder $14.95

Light, handy, efficient for workshop, garage or factory. Self-contained grinder with 1 fine and 1 coarse (4½" x ⅝") grinding wheels. New powerful shaded pole motor operates at correct speed. Self-aligning bearings. 1-piece cast aluminum housing has integral wheel guards, tool rests and switch. Plugs into any 110-120 A.C. circuit. No. 69 Electric Drill, drills holes up to ¼" in steel. Die-cast, pistol-grip makes it natural to drill straight holes. Has specially wound high torque tool motor, only $11.80.

Ask your dealer to show you the complete line of SpeedWay Blue Line Portable Electric Tools.

No. 69 ¼" Drill $11.80



SPEEDWAY MANUFACTURING CO.
1864 S. 52nd Ave., Cicero, Ill.

PHOTOGRAPHERS, profit from your hobby!
Enter the 1948 GRAFLEX PHOTO CONTEST!

62 PRIZES TOTALING $5000.00

Three classes! (A) Teen-agers (B) Non-professionals (C) Professionals. Two Divisions! *Action:* spot news, action, candid shots. *Feature:* portrait, pictorial, general salon work. Color section open to all groups! Lots of chances to win! Contest extends from September 1 to December 1, 1948.

GET ENTRY FORMS FROM ANY GRAFLEX DEALER

PRIZES

(A)	Action Division	Feature Division
1st	$150.00	$150.00
2nd	100.00	100.00
3rd	50.00	50.00

10 Honor Awards (5 in each division)—$10.00 each

(B) (C) each	Action Division	Feature Division
1st	$350.00	$350.00
2nd	200.00	200.00
3rd	100.00	100.00

10 Honor Awards (5 in each division) — $25.00 each

COLOR	
1st	$350.00
2nd	200.00
3rd	100.00

10 Honor Awards — $25.00 each

Special Press Award — $300.00 — open to all groups. Enter any photo published in a newspaper or magazine between October 1, 1947 and December 1, 1948.

NOTE: Only pictures made within the above dates with a *GRAPHIC*, Graflex, Crown or Century camera, anywhere in the world, are eligible in the contest.

GRAFLEX INC.
ROCHESTER 8
NEW YORK

Western Division: 3045 Wilshire Blvd., Los Angeles, Calif.
New York Sales and Service Offices: 50 Rockefeller Plaza



MOTION PICTURE CAMERAS

This beautiful 8mm Keystone is only **$67.50**

Taylor Field Compasses $1.50; Navy Deck Clocks 8 day only $37.50; Navy Type Boat Compass 4½ inch $35.00; Waterproof Flashlights (Navy) $1.75; Weems-Longines Navigation Watch (steel) $43.75; Fairchild Sextant (War Surplus) $12.50; Navy Lanterns, waterproof, with batteries $7.95; Navy type Barometers $17.50; Air Force type Sunglasses $2.75; Universal Binoculars 6 x 30, Price $85.00 plus federal tax. (Free Catalog)

PAN AMERICAN NAVIGATION SERVICE, Div. H-4 12021 VENTURA BVD., N. HOLLYWOOD, CALIF.

BURN WATER IN YOUR CAR!

THE NEW OCTA-GANE WATER INJECTING CARBURETOR GIVES YOU
BETTER MILEAGE & PICK-UP
MORE POWER & MORE PEP
CLEANER & COOLER MOTOR

New OCTA-GANE is the only water injecting carburetor engineered on the Venturi Principle. Only $24.25 complete with tank. Send only $1.00 down with special offer coupon at right. Send today! Mail postcard for particulars.

CONTINENTAL CARBURETION
DIV. 9A 1478 UNIVERSITY AVE., BERKELEY, CAL.

DEALERS: Write on your letterhead for discounts.

CONTINENTAL CARBURETION CO
Div. 9A, 1478 University Ave., Berkeley, Cal.

Sirs: Please ship me immediately one complete OCTA-GANE assembly under the plan checked below

☐ $1.00 enclosed, pay postman balance c.o.d.
☐ $24.25 enclosed, ship fully prepaid.

(PLEASE PRINT)

Name _____
Address _____
City _____ State _____
Make, Year & Model Car _____

Install ANCHOR AUTOMATIC HEATING *NOW.. for Winter Comfort!*

● Coal is still the *least expensive, most plentiful* fuel in most localities. However, ANCHOR provides all types of safe, clean, uniform heating equipment. Investigate ANCHOR *now!* Enjoy "Summerized" comfort this winter. Send coupon today for details on time-tested ANCHOR heating equipment.

Anchor Oil Burner Conversion Unit

ANCHOR Automatic GAS FIRED FURNACE

ANCHOR DIVISION, STRATTON & TERSTEGGE CO.
P. O. Box 311, New Albany, Indiana . P59
Please send literature on ANCHOR Heating Equipment.

Name_____
Address_____
City_____ State_____

ANCHOR

America's Finest Automatic Heating Equipment

FREE ALLIED'S GREAT RADIO CATALOG!

172 Value-Packed Pages
SEND FOR IT TODAY

Everything in Radio At Lowest Prices!

Get ALLIED'S *latest* Catalog—biggest and most complete in Radio! Tremendous values in new Television receivers, home radios, latest Amateur receivers and Ham station equipment, Sound Systems. Everything for the Builder and Experimenter—thousands of parts, tubes, test instruments, tools, books, diagrams and builders' Kits—the world's largest stocks—all at money-saving low prices! Get your copy today.

The Only COMPLETE Radio Catalog

FREE Catalog! Send for it

ALLIED RADIO

ALLIED RADIO CORP., 833 W. Jackson Blvd., Dept. 7-J-8
Chicago 7, Ill.

☐ Rush FREE 172-Page ALLIED Catalog.

Name_____
Address_____
City_____ State_____

AUTOMATIC SAW SET

HAND AND BAND SAWS

Set Saw TEETH Automatically—400 per minute without effort. Perfect hammer and anvil action sets teeth uniformly—tensions metal. No tooth breakage. Write today!



WITH MOTOR

Retooth Saws Automatically—with Burr Retoother. Cuts new teeth in 50 seconds—any size 4 to 16 points. Old teeth fall off as chips. Easy to operate. A perfect job. Write for literature on Circular Saw Sharpener.

BURR MFG. COMPANY
8943-Y Venice Blvd.
Los Angeles 34, Calif.

VALUABLE BOOK
Order Burr's Blue Book of Coast to Coast Prices for Saw Shop Services. **25c**

DUAL TAIL PIPE EXTENSION

Fits all cars—chrome plated
DEEP TONE
produced by 2½ inch outlets **$2.95**
Postage free on prepaid orders
DEALER INQUIRIES INVITED
LYONS PRODUCTS COMPANY
Pat. Pend. 2426 South LaBrea, Dept. P5-9, Los Angeles 16, Calif.

MILL IT ON YOUR LATHE

PALMGREN MILLING ATTACHMENT

Mill, slot, grind, groove, square shafts, recess-on lathe. Shops, schools, homes need this fixture. Fits Craftsman, Atlas, So. Bend, Logan, Sheldon, Perkins and others. Accurately graduated for rotary and vertical feed. No. 150, 1¼" Jaw $18.75. No. 250, 2½" Jaw, $24.75. No. 400, 4" Jaw, $39.75.

ORDER TODAY! Write for Circular No. 10

CHICAGO TOOL and ENGINEERING CO.
8396 South Chicago Avenue Chicago 17, Illinois

WOODWORKERS ... *Get this*

CONSTANTINE MASTER MANUAL

Get the Most Fun From Your Hobby

Indispensable to woodworkers. Newest, biggest edition, more pages, more color, helpful how-to-do-it articles, pre-war and new items, more bargains. Send 25c today and we will include ***FREE! FULL YRS. SUBSCRIPTION*** to Chips and Chats, published bi-monthly. Keeps you up-to-date on everything in woodworking, offers big money-saving bargains. Send now.

ALBERT CONSTANTINE & SON, Inc.
793-E 135th Street, New York 54, N. Y.

OTTAWA Buzz Master

No Other Like It!

A faster brush cutter and wood sawing machine. Propels itself while cutting saplings and brush. 7 H-P motor. Many outstanding and exclusive features. Available attachments: sickle bar, rotary tiller, sprayer, air compressor, snow plow and pulley for belt work. Thousands in use. Send for FREE booklet.

OTTAWA MFG. CO., 1-801 Brush Ave., Ottawa, Kansas

FLASH THAT VOLTAGE



Turn that knob. Extinguish the neon glow. Instantly read voltage off dial. MINI-VOLT model 400B measures 65 to 660 V. AC. Also DC. Tells AC or DC. Virtually burn-out proof. Guaranteed for 10,000 hours. 12" test leads. A "must" in electrical and radio work. At dealers or postpaid $2.50. (C.O.D. 25c extra.)

INDUSTRIAL DEVICES, INC., EDGEWATER 2, N. J.

DURABLE

TIME-TESTED

Stocks and fore-ends of *beautiful, durable, time-tested* TENITE are just an added *plus* feature when you buy a Stevens. Low in cost—tops in value and dependability—these Tenite-stocked models bring you highest quality stock features and appearance on guns priced with the lowest. *And* . . . Tenite stocks and fore-ends are durable and practical, too. They won't split, chip or crack under hard service . . . are moisture resistant and aren't affected by climatic temperature changes.

SEE these Tenite-stocked models, and other Savage-built rifles and shotguns—at your dealer's. Write for free catalog.

Savage Arms Corporation *Firearms Division* **Chicopee Falls, Mass.**

TENITE-STOCKED VALUES



STEVENS Model 124—12 gauge *Repeating Shotgun*. A 3-shot "repeater" that's entirely NEW in design and *sensationally* LOW in price.



STEVENS Double and Single Barrel Shotguns—Models 311 (double) and 94 (single). 12, 16, 20 and .410 gauge. Thousands of shooters know the top value and dependability of Stevens single and double barrel shotguns. They offer you quality gun features at lowest cost.



STEVENS Model 22-410—Over-and-Under. Upper barrel shoots .22 rifle cartridges—lower barrel, .410 shot shells. One of the most popular, practical guns ever built.

First in the Field

STEVENS
PIONEERING BETTER GUNS AND GREATER VALUES SINCE 1864

SAVAGE
WORLD FAMOUS FOR DEPENDABILITY AND ACCURACY

A Versatile Wire Recorder

for amateurs, hobbyists experimenters, professionals

Webster-Chicago MODEL 78

Webster-Chicago Model 78 Wire Recorder is designed for installation in existing radio consoles or with external amplifiers and speakers — ideal for ham radio, custom or home-built sound systems, public address equipment, home or professional movies, control rooms, etc. Model 78 is complete with

- **the famous Webster-Chicago wire transport mechanism**
- **Push-button control for finger-tip selection of recording through the microphone or direct from radio or record player and listening through radio or external amplifier**
- **Meter type recording volume level indicator**
- **Self-contained 105-120 V., 60 cycle power supply**
- **All necessary cables and plugs for simple and efficient installation are included**
- **Microphone and one spool of wire included**

The Webster-Chicago reputation for quality is behind this flexible wire recorder unit—a real value.

WEBSTER-CHICAGO

famous, too, for Webster-Chicago Record Changers and Magic Nylon Phonograph Needles.

5610 W. Bloomingdale Avenue, Chicago 39, Illinois

NEW!

12" BAND SAW

Cuts WOOD, PLASTICS, COMPOSITIONS

Add new work range in your shop with this new Power King band saw. It's smooth, accurate, powerful, solid . . . weighs 135 pounds! 14" x 14" precision ground table. Cuts to center of 24" circle. Saw wheels turn on 4 ball bearings. Blade is guided by 4 Oilite bearings—supported in back by 2 ball bearings. Here's a quality tool you'll be proud to have in your shop — built for years of service. Send for new free literature.

ATLAS PRESS CO. • Kalamazoo 13D, Mich.
959 North Pitcher Street



Sensational TWIN CARBURETION

POWER • SPEED • ECONOMY

• Amazing Mani-Daptor Unit allows twin carburetors on any car. Steps up motor efficiency approx. 20%. Firing order at no time affected by fadeouts—yet saves gas. More high gear driving, faster pickup, more economy with a Mani-Daptor. Precision-built aluminum polished unit will last for years. Comes complete with necessary linkage, easy-to-follow instructions. ORDER YOURS TODAY!

For 8-cyl cars $26.50 — **Chrome stacks $1.25 ea.**
For 6-cyl cars $32.00 — **Finned stacks $2.00 ea.**

Free Illus. Folder — *Stacks and carburetors are not included in price of unit*
Cash, check or money order. C.O.D.'s o.k.

L. B. BACKUS CO. Dept. PS-9
10617 Prairie Ave. Inglewood, Calif.

"Famous Industrial Safeguards Since 1910"

Save Fingers with Steel-Grip Finger Guards

Hundreds of factories are saving time and protecting workers with Steel-Grip Finger Guards. Used for handling rough, sharp articles, buffing, grinding, sanding, polishing, punch press work, many other jobs. Wear on fingers or thumb, front or back. Durable leather, elastic web back for snug, cool, comfortable fit. Easy on and off. One size fits all, men or women. Send 10c each for samples or trial order box of 50 at $4.25 less 10%.

Catalog of Steel-Grip Safety Apparel free on request.

INDUSTRIAL GLOVES COMPANY
1424 Garfield Blvd., Danville, Ill.
(In Canada: Safety Supply Co., Toronto)

Make this Cut-Out FREE

...on the amazing

NEW-SAFE SYNCRO MAGNETIC

JIG SAW AT YOUR HARDWARE STORE

1. PASTE GIRL ON WOOD

2. SAW AROUND GIRL

3. RESULT—a realistic photo "cut-out" suitable for mantel, desk, dresser use, or as "gift".

Now you can enjoy a FREE PERSONAL TRIAL on SYNCRO'S new, improved jig saw—so SAFE small children can use—so powerful, versatile, it's the handiest fun or profit tool for any home or home workshop! DO THIS NOW Paste "Miss Syncro" (or snapshot of yourself, family, sweetheart) on a piece of ¼" plywood, or ½" softwood—take it to your hardware store that displays SYNCRO—present Free Trial Coupon. Then flip switch on his SYNCRO SAW and cut out a wooden silhouette of "Miss Syncro" or your snapshot—take home for desk, mantel or dresser use. SYNCRO needs NO MOTOR! Plug into any 50-60-cycle, 110-120 Volt A.C. only—switch on and saw! Portable—use anywhere. Practical for craftsmen—cuts plastic, wood, thin metals, clean, smooth, no sanding needed Educational for children—safe—used in schools! Hundreds of thousands sold! Many use it to earn extra cash making signs, photo cut-outs, jewelry, initial pins, bookracks, what-not-shelves, etc. The ONLY safe jig saw made! Biggest, most powerful with greatest clearance of any magnetic jig saw! NEW ADJUSTABLE arm permits sawing ANY length material. New Off-On switch. Quieter operating. *Still* only $17.50 at dealers in U.S.A. If none near you, send only $17.50 (plus one dollar to cover cost of shipment) direct to factory with name, address of favorite hardware dealer—we'll ship saw to you POSTPAID on 10 Days Money-Back Trial. Or rush postcard for full, free details. (Dealers! Write, wire for "Special Direct to Dealers Introductory Demonstration Deal Offer.") Hurry!

EASILY MADE PROJECTS



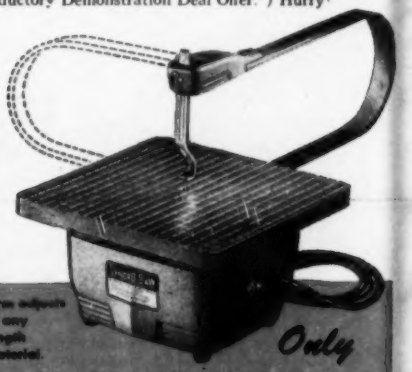

Arm adjusts to any length material.

Only **$17.50**

(No Motor to Buy)

"Miss Syncro the Magnetic Jig Saw Girl"

THE SAFE FAMILY PROJECT TOOL

SYNCRO™ CORPORATION
Dept. M-98
Rochester, Michigan, U. S. A.
World's Largest Makers of Electric Jig Saws

FREE TRIAL COUPON

MR. SYNCRO DEALER: This Coupon entitles bearer to cut-out, on your SYNCRO SAW, absolutely FREE, one illustration of "Miss Syncro" or *any other* snapshot or picture which has been pasted on ¼" plywood or ½" soft wood—or to personally try Syncro at store using material you furnish

SYNCRO CORPORATION, Rochester, Mich.

Excitingly Complete

FOR COMFORTABLE LIVING!

SCHULT

Your key to a 1948 Schult unlocks a furnished, equipped home that is today's outstanding VALUE in convenience, privacy and amazing completeness.

See the beatifully decorated living room, with china-closet desk and studio couch . . . the well-organized kitchen, with oven range, refrigerator, sink, and ample storage space . . . the separate bedroom, with built-in wardrobes.

Your Schult, a quality product backed by more than a decade of experience, offers many *plus-values* for year 'round living or extended travel. New, machine construction assures better quality than ever. Ask your Schult dealer to show you the latest 1948 models. Schult Corp., Dept. 3109, Elkhart, Ind. *In Canada:* John Inglis Co., Ltd., Toronto.

Free
Write today for book with pictures, details of latest models.

SCHULT *Trailer Coaches*

A TOOLSHOP IN YOUR HAND

THERE'S ONLY ONE GENUINE HANDEE

First tool of its kind—today's finest. Smooth, steady power at your fingertips. Easy to handle. Make ship, plane and train models, bookends, costume jewelry. Grinds, drills, polishes, routs, carves, sands, saws, engraves on metal, wood, plastic, glass, leather, etc. 25,000 r.p.m. AC or DC. Wt. 12 oz. With 7 accessories $20.50. In case with 40 accessories $27.50. At stores or sent postpaid. A fine gift for a friend or yourself. CHICAGO WHEEL & MFG. CO., 1101 W. Monroe St., Dept. PO, Chicago 7, Ill. Free 52-page manual.

HANDEE TOOL OF 1001 USES

New Precision Built Commercial

Wood Shaper and Matcher

Now Within The Reach Of Every Home Workshop

Make corner matched joints, panelling, fluting, routing, notching, inlay, tongue and groove and joints. Designed for commercial use, now simplified design and mass production brings it within the reach of every one. Just attach in chuck of drill press and it's ready to use. Write for complete FREE information.

Write for FREE Information **T & H Mfg. CO.** 811 East 31 St. Dept. DS-1, Kans. City, Mo.

BUILD YOUR POWER TOOLS

WITH POLY BALL BEARING ARBORS

Model D-12 Pictured

HEAVY DUTY GRINDER

3/4" x 17 1/2" precision spindle, self-lubricating ball bearings, heavy casting, V belt, 2 step pulley driven through rear or base.

ONLY **$15.95**

Ship wt. 13 pounds

FREE! Write for POLY illustrated literature.

C4-1/2 Pictured

POLY BALL BEARING ARBORS
C4-1/2 x 12 1/2 spindle, housing 2 x 8, $7.95 pp.
C5-5/8 x 12 1/2 spindle, housing 2 x 8, $8.25 pp.
C6-1/4 x 12 1/2 spindle, housing 2 1/4 x 8, $9.25 pp.
D8-1 x 17 1/2 spindle, housing 2 5/8 x 11, $17.00 pp.

SHAPER ARBORS 3 inches between collars, C4-1/2 $14.25, C5-5/8 $14.25, C6-3/4 $15.25, D8-1 $23.00, B25—1 1/2x2" capflange mount $5.50.
PILLOW BLOCKS—Ball Bearing: 1/2 $3.50, 5/8 $3.50, 3/4 $4.25.

POLY PRODUCTS, 2032-B E. Walnut, Pasadena 8, Calif.

BUILD AN ARC WELDER FROM OLD GENERATOR

For Light or Heavy Work. 75-200 amps. No previous experience needed. Complete **PLANS** and valuable Catalog 35c.

LEJAY MANUFACTURING CO.
1323 LeJay Bldg., Minneapolis 8, Minn.

ELECTRIC SHEAR SHARPENER

OVER 55,000 SOLD—IT MUST BE GOOD!

Genuine Carborundum wheel ideal for shop or home use. Send remittance with order and shipment will be made at once, prepaid to your door, complete with electrical goods catalogue.

Motor driven **$9.75** complete with vise

WILLIAM MARVY COMPANY, Dept. 7
479 St. Peter Street St. Paul 2, Minn.

Powell SETS THE PACE

DEALER INQUIRIES INVITED

- 7 H.P. Motorcycle-type Engine
- Faster pick-up than a car
- Automatic clutch
- Smooth, simplified control
- Solid steel frame
- Highway cruising speed of 45 miles per hour
- Chrome-plated fenders, handlebars, and sport muffler —looks like a custom job
- Costs no more than ordinary scooters

Write for FREE FOLDER and address of nearest dealer

Powell MANUFACTURING COMPANY DEPT. PS-8 COMPTON, CALIF.

New! Safe! Low-priced!
$49.95
Without motor, belt, or switch

Price subject to change without notice.

No chatter or backlash — with this

HOMECRAFT® SHAPER

No. 43-110

Short, stiff spindle runs in closely-spaced ball bearings that are lubricated for life. This cuts out whip and helps prevent chatter.

This *Homecraft* Shaper is "made to order" for you, the hobbyist. It is low in price. You don't pay for size and weight you don't need. But — features like these add up to a lot of shaper for the money:

- The spindles — 5/16" and ½" in diameter — can be interchanged. Thus, you can use a wide variety of cutters. You can make cope and reverse moulding, sash mouldings, door mouldings, brick moulds, base moulds, edges for cabinet work, etc.
- Fence is 25¼" long, when fully extended. For safety, you can adjust cutter-opening to cutter size.
- Big, heavily-ribbed 15½" x 18" table is finish-ground, for accuracy.
- Belt and motor pulley and spindle pulley are completely guarded.
- Shaper runs at 9,000 r.p.m. — for smooth, clean work — and can be reversed.

Ask your *Homecraft* dealer to show you this No. 43-110 shaper, and his complete display of *Homecraft* Power Tools that range in price from $9.80 to $49.95. Visit him now!

HOMECRAFT® POWER TOOLS

General Sales Office — Chicago 2, Illinois

HOMECRAFT POWER TOOLS

are built by the makers of Delta-Milwaukee* Power and Machine Tools — the tools with a widespread reputation for safety, accuracy, and dependability, in factories and schools, as well as thousands of home shops.

If your goal is a shop equipped with power tools that embody the most advanced principles of engineering, design, and construction, then insist on Delta-Milwaukee Power Tools.

HM-60

Send 10¢

— for woodworking handbook and catalog of Homecraft Power Tools. It's your guide to hobby happiness!

TEAR OUT COUPON AND MAIL TODAY!

DELTA MANUFACTURING DIVISION
Rockwell Manufacturing Company
683K E. Vienna Ave., Milwaukee 1, Wis.
Enclosed is 10c. Send me copy of new Homecraft Catalog HC-1.

Name.....

Address.....

City.....(....) State.....

BE YOUR OWN BOSS WITH A WOODBOSS

THIRTY SEVEN POUNDS OF CUTTING MAGIC

FALLING — BUCKING — SAWING TIMBERS

Hundreds of case histories prove that a man with a Woodboss Saw is always in demand. You and Woodboss can earn $200 to $300 a week! Contract logging or sawing for city, county or construction companies; contract falling and bucking, cutting cordwood, to mention a few. *Be your own boss with a WOODBOSS.*

Dept. S Write for free booklet and full particulars.

WOODBOSS, INC. 2712 N. Mississippi Ave., Portland 12, Ore.

New IMPROVED Electric MOTO-SAW

Only $5.85 (with 3 Saw Blades) Postpaid

SAFE AS A HAND SAW JUST GUIDE IT!

More like magic than any tool you ever saw. Imagine an electric scroll saw only slightly heavier than a hand coping saw . . . a tool that takes no effort to run, no pressure to feed. Works at any angle—on big assembly jobs or on the tiniest piece you can hold in your fingers. Runs 7200 strokes a minute . . . so fast the blade seems to stand still. Sturdily built . . . only two moving parts . . . never needs oiling. Easily cuts intricate designs—so smooth it eliminates sanding. Novice or craftsman, a thrill awaits you when you get a Moto-Saw in your hand.

THOUSANDS OF SATISFIED USERS

U.S. Patent 2233862 Other Patents Pend.

DREMEL MFG. CO. Dept. 128-J Racine, Wisconsin

No Limit to Length of Stock It Will Cut. Saws to Center of 19" Widths.

It's fast . . . cuts on an average of 1 ft. per minute up to 3/4" medium hard wood. Operates on 110-120 V. 50 or 60 cycle alternating current. If your dealer does not yet have Moto-Saw, send $5.85 . . . we'll pay postage. Or send $1. pay postman balance plus postage. MONEY BACK if not delighted after 5 days' trial.

NOW YOU CAN HAVE YOUR OWN ELECTRO-PLATING BUSINESS



The VARI-PLATER—110V. A.C.

Start your own business! Plate on metals, non-metals—it's profitable, simple! Start today! Plate GOLD-SILVER-CHROMIUM-PLASTICS, etc.

FREE! Write for information, price list.

LEWIS ELECTRICAL MFG. CO. 1943-S Walton Ave. New York 53, N. Y.

DEPENDABLE CRAFT SUPPLIES

LEATHER CRAFT • PLASTICS • POTTERY CRAFT
BLOCK PRINTING • BELT CRAFT
TEXTILE COLORS • POWER TOOLS • WOOD BURNING
INSTRUCTION BOOKS • WRITE FOR CATALOG

DWINNELL CRAFT SHOP

Dept. PS-89 • Elm Grove, Wheeling, W. Va.

Sensational New Electric ① WELDER ② CUTTER!

NOW! 10 DAY TRIAL

BOTH only $12

INSTRUCTIONS INCLUDED

The WELDRITE combination—tested and proven by countless commercial and amateur users, is now offered direct to you at the amazingly low price of only $12.00. No Gas—No Gauges—No Spark Lighter needed. Always ready for immediate use—Just plug WELDRITE into 110-115 AC or DC outlet. Uses standard welding and brazing materials available at all welding supply stores.

Uses 110-115 AC or DC

WELD - BRAZE - CUT
MELT - SOLDER - HEAT TREAT

WELDRITE furnished complete with Converter Unit, #1 Single Holder with attached Alligator clip, for welding metal up to 3/16" thickness, using up to 1/32" rod, and #2 Double Holder with Copper Coated Dual Carbon Electrodes for Cutting, Brazing, Heat Treating, Soldering, etc. Starting welding materials and instructions included.

Ideal for home workshop. Invaluable for body and fender shops, garages, repair and machine shops, manufacturers, etc.

WELDER HOOD With Wilson Weld Lens No. 10, approved by American Optical Company. Used in Hoods costing to $10, only 3.95

NAME _____

ADDRESS _____

SEND NO MONEY! 10 DAY TRIAL OFFER Order your WELDRITE Electric WELDER-CUTTER C.O.D. today. Pay postman $12 plus postage charges (wt. 4 lbs.) or send $12 and we pay postage. Either way, if not satisfied, return WELDRITE in 10 days, and money will be refunded. WELDER HOOD—Approved lens found in hoods costing to $10—only $3.95. California orders please add 2¾% sales tax.

☐ Send Weldrite C.O.D. $12 plus P.O. charges.
☐ Send Weldrite & Hood C.O.D. $15.95 plus chgs.
☐ Send Weldrite postpaid. I enclose $12.
☐ Send Weldrite & Hood postpd. I enclose $15.95
Same 10 day Trial Offer
☐ Send Free Folder.

CALIFORNIA TECHNICAL PRODUCTS CO. 448 So. Hill St., Los Angeles 13, Calif. Dept. BA-9

NONE BETTER! SUPER DRILL GRINDER

Sharpens round shank drills from 3/32" to 1 1/16" in diameter, up to 11" long. Grinds old drills like new in 4 different point angles, using hand or power grinding wheels. Money-back guarantee.

Price only $2.98
At Dealers or Postpaid

Crandall Mfg. Co. 1512 W. Slauson, Dept. FB-33 Los Angeles 44, Calif.

A BIG REEL AT A LITTLE COST!

KEEN KASTER THUMB CONTROL SPECIAL ☆ $1.94

Precision-built throughout. 5" diam. aluminum spool holds 500 ft. or more of line. Self-oiling, stainless steel shaft. Sensitive drag adjustment. No "back lash."

(Wn. State Res. add 6c Sales Tax)

Send P.O. Money Order to: THE BARRY COMPANY
P. O. Box 61, University Station Seattle 5, Washington

SPECIAL OFFER! SAVE ½
PORTABLE AIR COMPRESSOR
SPRAY PAINTING OUTFIT



½ HP. GE MOTOR **$47.50** COMPLETE LESS BASE

2.8 C. F. M. Displacement Compact Power Plus

Complete as shown, less base

Here is what you get: ½ HP. GE motor or equal, 110 volt, 60 cycle, 1 phase, 1750 RPM, with 6 ft. cord and plug; Compressor, 2 x 1¾ piston type; Spray gun with qt. cup, 2 nozzles, round-fan spray, oil and water trap, 20 ft. hose and fittings; belt and pulley. All belts necessary for mounting on base. We pass the big saving in labor on to you. All you have to do is mount on base as shown. Complete operating instructions furnished. Weight 50 lbs. **Special Price** **$47.50**

ALSO SOLD SEPARATELY:

Spray Gun, 2 nozzles, 20 ft. hose, weight 6 lbs. ..... $ 9.45
Air Compressor with oil and water trap, weight 15 lbs. 19.95
½ H.P. G.E. Motor, weight 26 lbs. 14.50

PRICES ARE F.O.B. CHICAGO. Immediate delivery. SOLD ON MONEY BACK GUARANTEE. Send check or money order today. WRITE FOR FREE FOLDER.

C & M EQUIPMENT COMPANY 1831 S. State St., Dept. S-9, Chicago 16, Ill.



SEWING MACHINE MOTOR KIT...

How To Convert Your Old Model Sewing Machine into a Modern All-Electric Machine—in a few minutes. Save up to $175 over cost of an electrical machine! Send for **free** folder. **Brownell Co., 308 Canal St., New York 13, N. Y.**



Make This MILLING MACHINE *Yourself* From low-cost LEWIS CASTINGS!

MILLS SLOTS, keyways, dovetails, flat surfaces, etc., in all types of metals. Castings sold rough or semi-finished. Comparable to similar commercially-built machines in quality and capacity. **WRITE FOR FREE CATALOG describing many LEWIS Power Tool Castings and Projects!**

LEWIS MACHINE TOOL COMPANY
P.O. Box 1896, Sta. A, Dept. 9, Los Angeles 23, Calif.

DRESS UP YOUR CAR WITH

Ace FENDER PANTS

Install these "heavy steer" prime finished fender skirts yourself—and pocket a "substantial savings."—Your car will have that "new look!" Hooks on in a jiffy to any 1935 to 1949 model of the cars listed at the right. Enclose money order—save freight—or order C.O.D., freight collect. Specify car make, year and model.

DEALERS WANTED

ACE AUTO PRODUCTS
Dept. PS-9, P.O. Box 366, Station S
Huntington Park, Calif.

Order by Mail $16.95 pr.

FORD OLDSMOBILE BUICK
MERCURY CHRYSLER DODGE
DE SOTO PLYMOUTH FRAZER
PONTIAC CHEVROLET KAISER

OWN YOUR BUSINESS

Start in Spare Time with a FOLEY SAW FILER

Here is a steady repeat CASH business you can start at home in your basement or garage, while you are working at your regular job. No experience is necessary to turn out perfect cutting saws—"the first saw I sharpened came out 100%. I think the Foley Saw Filer is a marvel of perfection," writes C.E.P. Every saw you sharpen will bring you new customers. You will find you can make up to $2 or $3 an hour—$20 to $30 a week in your spare time as a starter.

With a Foley Saw Filer you can file all hand saws, also band and cross-cut circular saws. It is easy to operate—simple adjustments—no eyestrain. Patented jointing principle evens up all irregular teeth and makes an old saw cut just like new.

This Free Book Shows How to Start

"INDEPENDENCE AFTER 40" shows you how to get plenty of saws to file without canvassing, and how you can develop into a general repair shop that will be your own business. This is a helpful, practical book that tells just what to do—send for your free copy today.

Send For **FREE BOOK**

FOLEY MFG. CO., 919-8 Foley Bldg., Minneapolis 18, Minn.
Send me free book "INDEPENDENCE AFTER 40!"

Name.....

Address.....

MASTER CRAFTSMEN
use these finest fillers!

- SAVES TIME
- SMOOTH TEXTURE
- EASIER TO WORK
- SHRINKS ONLY 1%
- STAYS IN

FOR a perfect surfacing job on wood, metal or plastic—use the expert's choice—Duratite. Easy to use—faster—shrinkage is so slight, it fills completely in just *one* application—stays in! 7 wood colors. Ask your dealer or send for large tube.

SEND FOR LARGE TUBE

WEBB PRODUCTS COMPANY
232 S. G St., San Bernardino, Calif.
Enclosed find 25c, send large tube Duratite Wood Dough.

Name_____
Address_____
City_____ Z____ State_____



DURATITE
WOOD DOUGH and SURFACING PUTTY

Pneumatic Air Tools

SAVE $64.00 AND UP

Ideal fender and bumping hammers, and for riveting brake lining, concrete breaking and many other uses. Like new. At these unheard of low prices it pays to order a good supply.

CHICAGO PNEUMATIC RIVETER & CHIPPING HAMMER
CP4X offset handle, with air control. Takes up to 1/4" rivet, weight 8 lbs. List Price $79.00. Special Price **$10.95**



RIVETER & CHIPPING HAMMER
Chicago pneumatic CP4 with air control, push button throttle, takes up to 3/16" rivet. Weight 6 lbs. List Price $73.00—Special Price..... **$8.95**

ARO AIR DRILLS—NEW 1/4" with Jacobs Chuck... Size 3/16"... $19.50 **$22.50**

PRICES F.O.B. CHICAGO. Immediate delivery. SOLD ON MONEY BACK GUARANTEE. Send check or money order.
Write for free folder
C & M EQUIPMENT COMPANY 1831 S. State St., Dept. B-9, Chicago 16, Ill.

1/4-TON ARBOR PRESS

Ideal for straightening, bending, light stamping, riveting, staking, production assembly and general presswork. Used ten years in plants and shops—bushings, cameras, reels, typewriters, instruments, light molding, etc. Grey iron castings. Height 7 1/2"; over table 2 1/2"; over base 4 3/4"; ram 5/16" x 7/16"; ram travel 2 1/4"; approx. pressure 500 lb. Weight 7 lb.

$9.50 POSTPAID U.S.A., MONEY-BACK GUARANTEE.
No C.O.D.'s, Please
H. D. HERDER, Tool Specialties
2423 Brock Dr. KALAMAZOO 82, MICH.

Powerful
Amazingly Accurate
Indoor or Out, the big, new
Boone AIR TARGET PISTOL

Including 150 rds BBs
Rustless steel and aluminum 9 3/4" long $3.95 postpaid (or $1, with $2.95 and postage C.O.D.)
PRECISION SPORTS PRODUCTS
Parma 11, Michigan
$3.95 POSTPAID

SOUTH BEND LATHE COLLETS

Precision Steel and Brass Collets for use in any make of lathe or other machine that they will fit.

SPECIFICATIONS

Collet No.	Thread Dia. In.	Thread Length In.	Th'ds Per In.	Body Dia. In.	Collet Length In.	Head Dia. In.	Head Taper Deg.
3	.650	3/4	26	.6495	2-11/16	.852	12
2	.855	13/16	20	.8595	3-5/16	1.095	15
5	1.250	3/4	20	1.2495	3-9/32	1.452	10
4	.950	13/16	20	.9495	3	1.150	10

	No. 3	No. 2	No. 5	No. 4
STEEL COLLET	$3.75	$4.00	$4.75	$4.25
BRASS COLLET	2.00	2.25	2.50	2.35

SOUTH BEND LATHE WORKS 456A E. Madison St. South Bend 22, Ind.

CARBURETOR TOO RICH
MAKES MOTORIST TOO POOR

Car owners who are wasting money and not getting proper gas mileage due to over-rich mixtures will be pleased to learn how to save gasoline by VACU-MATING over-rich mixtures. VACU-MATIC fits all cars, trucks and tractors. It is *automatic* and operates on the supercharge principle. Easily installed in a few minutes.

SALESMEN WANTED! Big Profits! Send name, address on penny postcard for *free particulars* and how to get yours for introducing.

VACU-MATIC CO., 7617-1385 W. State St., WAUWATOSA, WIS.

GIVE YOUR CAR THE "WOLF CALL"
of Deep Tone DUAL MUFFLERS

ADVANCE MUFFLERS
6800 S. Vermont Ave., Los Angeles 44, Cal.

The rich, low, mellow sound of "straight thru" ADVANCE mufflers is something all your friends will admire.

Also greater power, speed, and economy result from the reduced back pressure of this scientific design. Rugged steel tube throughout (no aluminum); blowout-proof.

SIMPLE TO INSTALL. No welding, cutting, or holes to drill. Complete with rubber mounted clamps (no rattle) and all necessary fittings.

ADVANCE MUFFLERS, 6800 S. Vermont Ave., Dept. PS-98, Los Angeles 44, Calif.
Send Check, Money Order, or we will mail C.O.D.
You pay postage upon receipt.

Dual Muffler Set (Ford, Mercury only) $20.00 ☐ Single Muffler (other makes) $3.50 ☐
Single Muffler (Ford, Chev., Plym.) 4.86 ☐ 2½" Chrome tail pipe tips 1.75 ☐

Car make_____ Year_____ Model_____
Name_____
Address_____ City_____ State_____

REMOTE INDICATORS

(For use with Remote Weather Vane Indicator as described in POPULAR SCIENCE, p. 180, March 1948.)

Selsyn remote position indicators. When the shaft of one unit is turned the shaft of a remote unit will follow to the same position. Operates at any distance with only simple electrical connections in between.

Brand new units manufactured by General Electric, 2¼" diam. by 3½" long, with threaded shaft and nut. Pair operates with capacitor on 115 volt/60 cycle AC house current. Capacitor and complete instructions included.

STOCK NO. SEL-50 ..... **$3.95** Pair

Mail orders please include 30c per pair east of the Rockies, 50c west, for postage and handling.

DUBIN ELECTRONICS CO., INC., Dept. PS-9
103-02 Northern Blvd., Corona, N. Y.
Tel. HI 6-3066 • Send postcard for bulletins on "surplus" electronic equipt.

Guard against CAR BATTERY FAILURE

Don't risk being stalled through storage battery failure. The HANDY BATTERY TESTER shows individual cell voltage under operating conditions. Calibrated color scale, 0-3 volts, indicates "satisfactory" or "unsatisfactory" under load, no load or charging. Also checks flashlight or #6 dry cells. Anyone can use it. A fine, durable instrument. Attractive permanent finish. Check or money order. **$2.00** post-paid

DUBIN ELECTRONICS CO., Inc.
Dept. PS-9 Box 68 Corona, N. Y.

ASSEMBLE King Midget

Highway runabout. Low cost. 45 miles per hour. 90 miles per gallon. Just bolt together our factory built units. See how easy it is. Send $1 (refunded first order) for 24 page assembly book with blueprints, drawings, photos. PLUS detailed illustrated circular.

Circular only—25c.

SAFE ● PRACTICAL ● ECONOMICAL ●

MIDGET MOTORS Athens, Ohio

MACHINE STEEL AND BRASS USERS

TOP-GRADE ¼" GROUND AND POLISHED
DRILL ROD—ONLY 82c ..... **3 Foot Bar**
A WIDE ASSORTMENT, BIG STOCK
COLD FINISHED STEEL, in rounds, flats, squares, hexes
FREE CUTTING BRASS in rounds and hexes

WRITE FOR FREE PRICE AND STOCK LIST

This Chesterfield Price and Stock List is yours for the asking. Prices, specifications and uses are shown on the complete line of machine steel and brass. A **must** for every home hobbyist, small shop and farmer. You'll surely want your copy today. Write immediately.

AN INTRODUCTORY OFFER FOR YOU!
For your first order of $5.00 or more, we will give you ABSOLUTELY FREE, a handsome calibrated 6½" rule! AND YOUR NAME IS ENGRAVED IN GOLD LETTERS ON THE FACE OF THE RULE! When you write for the stock list, you will get full details.
DON'T DELAY! WRITE TODAY!

CHESTERFIELD STEEL SERVICE CO.
Dept. S-9 P. O. Box 3058 CLEVELAND 17, OHIO

Millers Falls No. 220 "Dyno-Mite" Drill. Length 9¼"; weight 3¼ lbs. For home workshop, farm or light production and maintenance work.

It's new! It's DYNO-MITE

If you've always wanted an electric drill, because you've known how useful a good, compact, lightweight drill can be — then "want" no longer! The new Millers Falls "Dyno-Mite" is the drill for you — packed with all the power and speed and stamina you've dreamed of in a tool this size.

"Dyno-Mite" is typical of all the other fine drills, hammers, grinders, screw drivers, sanders, and polishers in the Millers Falls line of portable electric tools. There are 80 years' experience behind every Millers Falls tool you buy at your hardware dealer's. Millers Falls Company, Greenfield, Mass.

It's Millers Falls!

Celebrating 80 Years of Toolmaking

MILLERS FALLS TOOLS
SINCE 1868

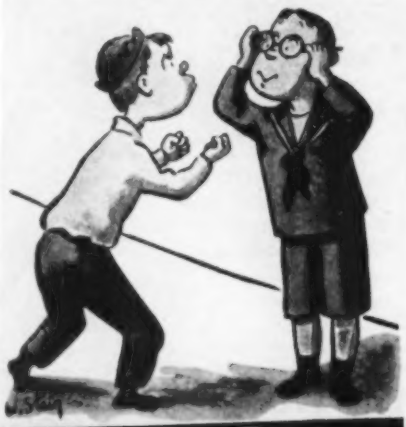

What's Extra Protection Worth to You?

★Casite gives you extra protection and cuts engine wear because it improves lubrication. No matter what kind of motor oil is being used, Casite gets it around—quickly and into the tight spots. Casite retards formation of sludge and gum . . . keeps your motor clean and free-running . . . guarantees Better Motor Performance or Double-Your-Money-Back.

Get Casite today, from your garage, service station or car dealer. The Casite Corporation, Hastings, Michigan, and the Casite Division, Hastings Ltd., Toronto.

75¢ A PINT
95¢ IN CANADA

IMPROVES LUBRICATION CUTS ENGINE WEAR

World's Most POWERFUL, Most USEFUL, Most

COMPLETE

Hand Tool !

Tremendously **POWERFUL**—double-lever action gives one hand **TON** Gripping Power! Amazingly **USEFUL**—adjusts to ratchet action or **LOCKS** to the work, freeing both hands—is actually many tools in one. Now has important new features: 1—**INVOLUTE JAW CURVE** gives tremendous holding power, all shapes. 2—**THIN NOSE**, stronger than ever, gets into close quarters. 3—**SUPER WIRE CUTTER** cuts wire, small bolts. 4—**KNURLED JAW TIPS** hold to the very tip. 5—Easier to open from locked position. Fine alloy steel. Nickel plated. **With** cutter—7", $2.25; 10", $2.50. **WITHOUT** cutter—7", $1.85; 10", $2.25.

If not at your dealers, order direct. Postage paid if price accompanies order.

Made only by PETERSEN MFG. CO., Dept. E-9, DeWitt, Nebr.

EVINRUDE Catalog Free

Describes complete line of 1948 Evinrude Outboard Motors—sensational new "Sportwin" model — 2 models with revolutionary "Weedless Drive" — 3 thrilling four-cylinder models. Gives helpful information on boats, speeds, etc. Profusely illustrated. Write

EVINRUDE MOTORS
5842 N. 27th St., Milwaukee 9, Wis.

LUMBER

TOP GRADE KILNDRIED
Walnut
Mahog.
Cherry
White
Hard
Maple
Poplar
Oak
Aromatic
Red
Cedar

A BOARD OR A CARLOAD

Harold Hunt wants to send you big, new No. 15-B Catalog. Over 148 pages of woodworking ideas. 12 pages of rare woods in colors. UNEQUALLED BARGAINS in imported and American woods, supplies, hard-to-find hardware. Send only 15c to cover postage and handling.

CRAFTSMAN WOOD SERVICE CO.
2729 S. Mary St. Dept. B-97 Chicago 8, Ill.

Say You Saw It In Popular Science

WORLD'S LOWEST PRICED

ADDING MACHINE

Vest Pocket Size
FREE TRIAL
Only $2.95
Total Cost
SEND NO MONEY

IDEAL FOR BUSINESS OR PERSONAL USE—GUARANTEED ACCURATE. Not a toy. Operates with only a finger flick. Adds, subtracts, multiplies, divides. Counts up to one billion. Pays for itself over and over. Ideal Gift—for Business, Income Tax and School use. MONEY BACK GUARANTEE. Send name and address. Pay postman only $2.95 plus postage. ; Send full cash if outside U.S. ; Beautiful rich-looking Leatherette Case included at no extra cost. Money back in 10 days if not delighted. **AGENTS WANTED.**

Calculator Machine Co., (Mfrs.) Dept. 504, P.O. Box 248 Glenview, Illinois

You "PLATE" when you LUBRICATE WITH GRAPHITE!

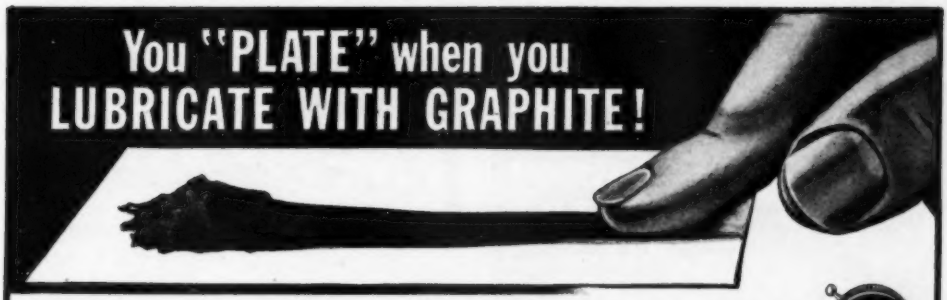

Whether you apply a graphite powder, a graphite stick, a graphite grease or a graphite oil, an adequate amount of graphite becomes microscopically deposited or "PLATED" on the wearing surfaces!

This lubricating "plate" of graphite stubbornly resists the extremely destructive forces of friction, pressures, speeds, heat, cold and solvents that decompose or displace ordinary lubricants. You'll be amazed at how much more *effectively* the plating action in *Graphite Lubrication* reduces wear, saves lubricant and labor.

There is a ready-to-apply GRAPHITE "PLATING" LUBRICANT for nearly every use in every home, industry, auto, boat, railroad, airplane etc. Illustrated here is one typical product of each of these *four types* of Dixon's Graphite Plating Lubricants stocked by the nation's supply houses.

POWDER
Dixon's Graph-Air Gun, Type 4....40¢

STICK
Dixon's Slipstik 20¢

GREASE
Dixon's Cup Grease No. 3..60¢ 1 lb. can

OIL—Dixon's Lubricating & Penetrating Oil...30¢

DIXON'S GRAPHITES

JOSEPH DIXON CRUCIBLE COMPANY JERSEY CITY 3, N. J.
DIVISION 27-KP-9

MAILED FREE for the asking—this Data Sheet Directory shows what free descriptive printed matter is available on 20 Dixon Lubricating "Plating" Graphites.

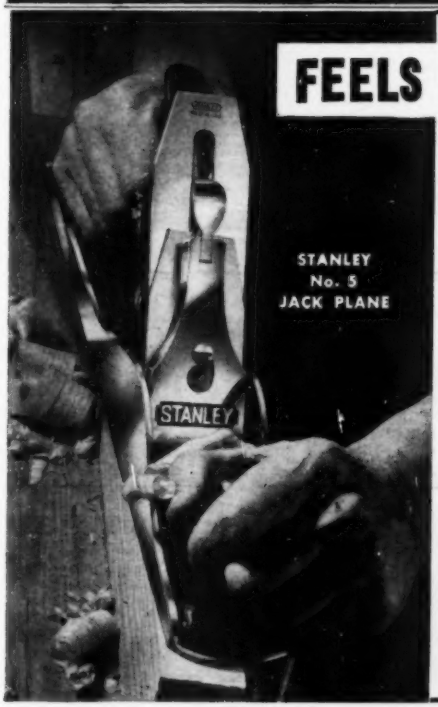

FEELS RIGHT...WORKS RIGHT!

The minute you grasp a Stanley Plane and ease the cutter into the wood, you feel the fitness of a fine tool . . . the skill of your hand and eye going right down to the face of the work. It's responsive! It's beautifully balanced! It's right in every detail, from the bevel of the cutter to the way the knob and handle fit into your hands. A lot more than good steel goes into a tool like that . . . the best ideas of generations of the best tool users. You can't get more than that in any tool: you always get a full measure of it in Stanley Tools.

Let this coupon bring you these two books

THE TOOL BOX OF THE WORLD
STANLEY
Reg. U.S. Pat. Off.

One is FREE! The other, the latest edition of a famous textbook for the home workshop, clothbound, fully illustrated, just $1.00

– HARDWARE • HAND TOOLS • ELECTRIC TOOLS –

Stanley Tools, 298 Elm St., New Britain, Conn.
Please send by return mail:

☐ **FREE booklet: "The Joy of Accomplishment".** ☐ **188-page book: "How to Work with Tools and Wood". $1.00 enclosed.**
(In Canada: Send order to Stanley Tool Co. of Canada, Ltd., Roxton Pond, Quebec.)

Name.....
Address.....
City..... *State*.....

ELECTRIFY YOUR SEWING MACHINE



SEWING MACHINE MOTOR KIT...

90 DAY GUARANTEE

$16.75 COMPLETE

ANYBODY CAN INSTALL IT!

ADJUSTABLE FOR USE WITH ANY TYPE OF SEWING MACHINE

FULL SATISFACTION OR MONEY BACK



COMPLETE SET CONSISTS OF:
- MOTOR—Fan-Cooled, universal AC or DC, 60 cycle, 115 volts
- BELT—Long wearing rubber
- PULLEY—Single grooved steel hubbed pulley.
- BRACKET—New and improved.
- FOOT CONTROL—7 step rheostat.
- CORD SET—Extension cord with plug and socket.
- Installation Instruction Sheet.

SPECIAL OFFER!

If you send your order within a twenty day period we include a FREE Sewing Machine Light complete with attachment Socket & Light bulb (value $2.75) with your kit.

PS-948 **BROWNELL DISTRIBUTORS, INC.**
308 Canal Street, New York 13, N. Y.

Please rush your kit at $16.75. The make of my machine is ..... Handwheel turns: ☐ towards me ☐ away from me.

NAME .....

ADDRESS .....

CITY ..... ZONE ..... STATE .....

To save postage and C.O.D. charges, I am enclosing $16.75 ☐, check ☐, money order ☐. Send C.O.D. I'll pay postman $16.75 plus C.O.D fees

BUILD YOUR OWN • FAST FREEZER •

PLANS $1

It's easy to build this household appliance with LeJay Plans. Made from new or used parts. Save up to 75%. No expert knowledge needed. Plans show 5 sizes and are easy to follow. All details clearly explained. Enjoy making one of these freezers. Mail $1 for set of plans and catalog. **LEJAY MFG. CO., 423 LeJay Bldg., Minneapolis 8, Minnesota**

5 sizes 8 to 40 cu.ft.

EASY TO BUILD

KAYAKS
INBOARDS
OUTBOARDS
ROWBOATS
RUNABOUTS
DINGHIES
V23 CRUISER

U-MAK-IT BOAT KITS for Home Assembly. Complete with Illustrated Instructions. No Experience Necessary. SEND 25c Postage (Coin) Today for 3 Money Saving Illus. Catalogs Showing all '48 Models & Construction Details.

KAYAK BOAT CO.
703R-WHITTIER ST., N. Y. 59, N. Y.

HARGRAVE I-BAR CLAMP

PATENTED

The Hargrave "I" Bar Clamp—the favorite of craftsmen everywhere—is designed for the hard, everyday grind of production. Web notches permit quick action, no slipping. Heat treated steel screw. Openings from 2 feet to 10 feet.

At Hardware and Mill Supply Dealers Everywhere.

Write for Catalog of Complete Line

1955 Waverly Ave. Cincinnati 12, Ohio

The **CINCINNATI TOOL** *Co.*

Even Cuts Bolts Without Hurting Blade

3½" blade, 7" overall. Finest lucite handle in black, red, blue or green. Rugged saddle leather sheath included.

AMAZING BENCH KNIFE CUTS ANYTHING

My famous handmade Buck knife has a blade that's tempered by a secret process to last a lifetime. The edge is ground to razor sharpness—cuts anything. Handiest tool on your work bench. Ideal for small game. Send check or money order. Satisfaction guaranteed or your money back. $5 postpaid.

H. H. BUCK & SON
1272 Morena, San Diego, California

SPEED AND POWER HANDBOOK

Very latest methods! Construct your own super-chargers, water injectors, compression heads, fuel saving devices—easily, practically without cost. Get racing speed, acceleration, dynamic power increases from any automobile! Build stock conversions! Fast roadsters! Hot-rods! Get ingenious formulas! Speed secrets! Also "Economy Information"—Tuning techniques! Ignition, Carburetion, Fuels, Mileage tricks! Illustrations! Catalogues, Including "California Re-styling Ideas"—Glossy photographs! Drawings! Model revising! Customizing! Streamlining! Sport changes! Leatherlike bound—$1.98 complete.

NEWHOUSE AUTOMOTIVE INDUSTRIES, 5906-44 HEREFORD, LOS ANGELES 22, CALIF.

SAVE! ON POST LAMPS!

New Kits bring beautiful rugged colonial post lamps in reach of all craftsmen. Deluxe Kits $7.95 and up. Send for FREE LITERATURE today.

LORENZEN INDUSTRIES, Dept. PS-9, Niles, Mich.

THIS IS THE BUSINESS YOU DREAM ABOUT

QUICK STEADY PROFITS

CORADIO

The Coin Operated Radio

IT'S the new, fast-growing, depression-proof business. Coin operated radios are placed in hotels, tourist courts, clubs, hospitals, etc. on a commission basis—play 1 or 2 hours for 25c and produce immediate profits.

The best coin operated radio is CORADIO

ACT NOW

Start your own lifetime business, full or part time. Limited capital required.

Send for further information.

WRITE TODAY Dept. P.S.

CORADIO
COIN OPERATED RADIO
212 Broadway, N.Y.7, N.Y., Beekman 3-0038-9



NEW!

HANDY FLEXIBLE SHAFT

ONLY $2.95

- **Converts Any Motor, Drill Press, Electric Drill, Electric Fan Into A Handy Rotary Tool.**
- Attach ROTA-SHAFT in a Jiffy. Can Be Used for Grinding, Polishing, Sharpening, Cleaning, Engraving, Marking Tools, Carving, On Metal, Plastic, Wood, Glass.

YES! Only $2.95 and ROTA-SHAFT turns your old motor, drill press, electric drill or electric fan (10 inch or larger) with blades removed, into an efficient, versatile Flexible Shaft Tool for doing hundreds of grinding, polishing, sharpening jobs, especially in hard-to-get-at places. Attaches to motor shaft or in chuck. Convenient handpiece for ease of handling. Generous 40-inch overall length. Comes complete with buff and sanding disc ready to use in a drill press chuck. Order today.

OLD FAN MOTOR

YOUR ELECTRIC MOTOR

VACUUM CLEANER MOTOR

SEND NO MONEY! Just mail order. Pay postman only $2.95 plus postage on delivery, or send $2.95 and we pay postage. Try 10 Days—if not delighted return for money-back.

If you order Rota-Shaft for use on motor add 35c for Special Coupling and State Shaft Diameter. MAIL ORDER NOW!

STRADER PRODUCTS CO. Dept. E-102
259 Strader Ave. Cincinnati 26, Ohio

Go Right Ways without Delays with a HULL AUTOMOBILE COMPASS

(Left to right)
Beaconlite illuminated **$5.95**
Streamline standard **$3.95**
Streamline Marine $2.75
Fully Guaranteed
At your dealer's. Write for circular.

HULL MFG. CO., P. O. Box 246-E9, Warren, Ohio

Free Leathercraft

instructions

All materials for making easy-to-assemble leather goods. Free instructions included. No experience necessary.

MAKE AS GIFTS—OR TO SELL

Belts, gloves, purses, woolskin toys and mittens, 100 other practical, money-making items. Largest complete stock of leather and leathercraft supplies in America. Immediate delivery.

Send 10 cents for new catalog of gift suggestions and profitable ideas. Write today.

J. C. LARSON COMPANY
826 S. Tripp Avenue, CHICAGO 24, ILL.

Only CASCO gives you

A COMPLETE ELECTR-O-TOOL KIT

for only 14.95

You get routers, sanding discs, buffing wheels, mandrels, chocks, grinding wheels, drill, wrench, rubber polishing wheel — all of the most popular accessories *plus* the famous precision-built Casco power-head with genuine fractional HP AC-DC motor—all in a sturdy tool box, *everything* for just $14.95!

EVERYTHING A CRAFTSMAN NEEDS TO TURN OUT PROFESSIONAL WORK!

Job-tested in industry! Smooth vibrationless operation at 20,000 RPM. 14-part ribbed commutator turned within .0005. On-off switch for easy one-hand control. Oilless bearings. Unbreakable plastic Tenite case. Special safety sleeve and shaft lock. Non-slip chuck. Triple cooling for steady performance under load. 90-day guarantee.

On sale in leading stores!

Standard 21-pc.

CASCO 14.95

Electr-o-tool kit

with famous Casco electric power-head and popular accessories. Sturdy carrying box.

10c brings you this 36-page PROJECT BOOK

Casco Products Corp., Dept. PS-9
Bridgeport 2, Conn.

Enclosed is 10c to cover cost of mailing my 36-page Casco PROJECT BOOK.

My hobby is_____

Name_____

Address_____

City_____ State_____

"PLASTICS"

Work in a fascinating and profitable hobby. Just out—our latest fabricating manual. Tells you how to work with Plastics. Our new Catalogue provides all needed materials: Plexiglas—Lucite—Tenite—Catalin—Acetate—all in sheets, rods, and tubes. Complete line of cements, dyes, accessories and supplies. Send 20c today for Fabricating Manual and Catalog. No overseas shipments.

HOUSE OF PLASTICS

8648 Linwood Avenue, M. O. Dept., Detroit 6, Michigan

Make your STOP LIGHT SHOUT!

AMAZING STOP LIGHT FLASHER!

Make Your Stop Light Flash 115 Times Per Min.

A SENSATION! Automatic. Instant acting when foot brake applied. Non-rusting, Dust, Oil, Vapor & Waterproof. Used by police & fire depts. Attach in 5 min. to any model car or truck. Approved by leading safety engineers. **FREE WITH ORDER, "HOW TO SAVE MONEY ON CAR 'Motoring Hints' BOOKLET".** ACT NOW! If dealer can't supply send $3.00 cash or M.O. We pay postage.

"STOP-IT" makes stop light flash 115 times per min.

MACCHI & CO., Dept. SS
927 Larkin St., San Francisco, Calif.
Dealers & Agents Wanted

FASTEST PLANER in the WORLD at this Low Price... $215.00

BELSAW Multi-Duty Planer

Speed up production! Increase your profits! BELSAW power self-feeds at 24 feet per minute...The lowest-priced surfacer that will handle 12 x 6 in. stock. Planes green or dry sawed lumber into smooth, worked forms. Three high-speed steel knives make 42 cuts per inch. Multi-duty BELSAW takes inexpensive attachments for all planing mill operations—Jointing, Rabbeting, Grooving, Matching. BELSAW is the ***only*** 12 in. planer providing ***attachments for jointing and grinding its own knives.*** Start planning NOW for BIGGER VALUE and BETTER PERFORMANCE, with BELSAW. Write for FREE specifications, illustrations and low prices.

● LARGER CAPACITY ● FASTER OUTPUT ● KNIFE SHARPENING ATTACHMENT

BELSAW MACHINERY CO 1020 Field Bldg., 315 Westport Rd., Kansas City, Mo.

BARGAIN!
ELECTRIC DRILL KIT

Use your Electric Drill or Drill Press to polish, buff, clean rust, sharpen tools and shape metals.

With 1/4" shank—$5.00
Worth many times this special price.

Kit consists of

1—3 x 1/4 x 1/4 Emery wheel
1—4 x 1/16 x 1/4 Cut off wheel
1—3 x 1/16 x 1/4 Cut off wheel
1—2 x 1/4 x 1/4 Rubber wheel
1—1 1/4 x 1/4 Wire wheel
1—3 x 3/4 x 1/4 Buff
1—1/4 Arbor for above wheels
5—Asst. mounted stones 1/4" shank
4—Asst. Felt Bobs
1—Arbor 1/4 shank for Felt Bobs

HIGH SPEED ROTARY FILES

Set of 5 Assorted		$ 2.00
" " 10	"	3.75
" " 20	"	7.25
" " 30	"	10.00

1/4" shank

BARGAIN KIT FOR HAND GRINDERS

15 Asserted 1/8 shank mounted stones as shown below.....$2.50



SEND FOR FREE CIRCULAR — Enclose 3c stamp for mailing

SID TOOL CO., INC.
183 Grand Street New York, N. Y.

ROLLER BEARING WHEELS

IDEAL for home use: garden and shopping carts, wheelbarrows, coasters, wagons, racers, etc. Heavy cushion rubber treaded tires. Baked cream enamel steel discs 10" x 1.25". 3 1/2 lbs.
SATISFACTION GUARANTEED.

Send Check or Money Order $1.85 ea.
Set of Two $3.55 Set of Four $6.95

Postage Prepaid

COLSON EQUIPMENT & SUPPLY CO.
1317 Willow St. Los Angeles 13, Calif.

$5.95 *SURPLUS VALUE of the MONTH!*

THE HANDY KIT

20 brand new tools and sets . . . over $25 value. ALL the ready tools for household repairs . . . car adjustments too! Ideal for farm and city homes. In a compact all-metal case.

3/4 x 7/8 end wrench; 3 screwdrivers, wrench set: 7/16 box and open, 11/32 x 3/8, 5/16 x 9/32, 1/4 x 5/16, ignition wrench with feeler gauge, 3/8 x 7/16. Pliers, punch set, rivet set, rubber tape, tire gauge, hack saw, tack hammer, paint scraper, parts brush, stencil set, spill-proof oil can, mechanic's apron, bearing scraper, leather tool case, eye shield, and flashlight.

SHIPPED F.O.B. PINEDALE, CALIF. Send 25% Deposit With C.O.D.'s

SEND FOR FREE CATALOG

VALLEY DISTRIBUTING CO.
Dept. S, P. O. Box 8
PINEDALE, CALIFORNIA

RIDERS!

HERE'S AMERICA'S MOST COMPLETE MOTORCYCLE LINE

DEALERS!

For the cyclist who wants the best . . . for the dealer who is looking for machines that will answer every requirement for pleasure, racing, business, Johnson Motors has the most complete line of motorcycles in America.

MUSTANG

The sensational lightweight motorcycle that delivers maximum safety, performance and economy for both veterans and beginning riders. 19 1/2 cubic in. motor. Sells for less than $400.



ARIEL

The world's most exclusive motorcycle, available in two models: the "Red Hunter," 30.50 cubic inch O.H.V. Single, and the famous 4-cylinder, 61 cubic inch "Square Four." 30.50 O.H.V. "Twins" available soon.

TRIUMPH



Triumph Twins have earned a place of leadership in sport and business all over the world. Available in three models, with overhead valve engines: 21 cubic inch "De Luxe," 30.50 cubic inch "Speed Twin" and famous 30.50 cubic inch "Tiger 100."

Exclusive Distributors for the United States

Johnson Motors, Inc.

267-C W. Colorado Street Pasadena, Calif.

DEALERSHIPS STILL AVAILABLE
WRITE FOR INFORMATION

CASH IN ON THE BUILDING BOOM!

MAKE BUILDING BLOCKS RIGHT IN YOUR OWN BACKYARD AMAZING GENERAL BLOCK MACHINE

CAPACITY 1000 BLOCKS PER DAY

ONLY $199 LESS MOTOR F.O.B. PLANT SHIPPING WEIGHT 400 lbs.

Cinder and Concrete Blocks in big demand. Sell all you produce, to contractors and builder supply yards, at 15c to 25c each. Easy to start your own profitable business.

GENERAL BLOCK MACHINE can be operated indoors or out, in floor space 9 ft. x 10 ft. All steel construction. Vibrator mounted in sealed ball bearings. Simple to run. Powered by ½ H.P. electric motor or 1 H.P. gas engine. Produces up to 1,000 8x8x16 blocks in 8 hour day. Superior 3 core type, meeting all building code requirements. Produces 4x8x16, 8x8x16, 12x8x16 blocks. Material for blocks, cinders, cement and sand, obtainable anywhere. Full instructions and mixing formulas with each machine. Immediate Delivery. Mail coupon at once for full details, sent free without obligation.

HOW TO BUILD YOUR OWN CONCRETE BLOCK HOME Only $1 Prepaid

Wonderful book written and illustrated by our staff of experts.

GENERAL ENGINES CO.
(EASTERN DIVISION) DEPT. H—DREXEL BLDG., PHILA. 6, PA.

Shows you 8 ways to save money and how to make and lay blocks, laying out building lines, mixing your own concrete, building steps, porches and concrete floors, includes floor plans for 6 beautiful easy to construct concrete block bungalows. Mail coupon at once with $1.

Name .....
Address .....
City ..... Zone ... State .....

TX-5 GEIGER COUNTER for Locating RADIOACTIVE MINERALS

The TX-5 is light weight, battery operated. Locates deposits of radioactives. Simply switch "on"—clicks in headphones indicate presence of radioactives. Extra sensitive, yet ruggedly built.

Each unit comes complete with headphones, probe, batteries and manual. For prospecting and mining operations. Write for details and price. Address Dept. 9

Geiger Counters for every purpose
• OIL PROSPECTING
• MINERAL LOCATION
• HOSPITAL WORK
• INDUSTRIAL USE

OMAHA SCIENTIFIC SUPPLY CORP., 3623 LAKE, OMAHA 4, NEBR.

CROSMAN Silent RIFLE

POWER without POWDER

You'll like a Crosman because there is no recoil to spoil your aim . . . no noise . . . no odor . . . no cleaning! Rifled barrel for greater accuracy . . . adjustable power, too, for short or long range shooting indoors or out. Available in .177 and .22 cal. models.

AT YOUR DEALER OR WRITE DIRECT
CROSMAN ARMS CO., INC.
9 HENRIETTA ST., ROCHESTER 7, N. Y.

$4.95 REAL ENGINE VALUE

A miniature gas engine that really operates. Thousands of Buzz "B" gasoline engines have been sold at twice the price. Now is your chance to buy a real 1/6th H.P. gas engine for only $4.95. Turns up over 8,000 rpm. For Boats, planes, midget cars, etc. Guaranteed and ready to run. Includes Champion spark plug and tank. Send only $1.00, engine shipped collect for balance, same day. Write for free catalog or SEND 10c FOR NEW MAMMOTH ILLUSTRATED CATALOG OF THOUSANDS OF HOBBY ITEMS.

America's Hobby Center, Inc., Dept. B-98, 156 West 22 St., N.Y. 11

Woodworkers !!
Make your circular saw the most versatile tool you own!

CUT GROOVES LIKE THIS

$4.95 SET POSTPAID INCLUDING TAX

WARREN DADO SAWING WASHERS WILL FIT THE ARBOR OF ANY POWER CIRCLE SAW AND CAN BE USED WITH ANY DIAMETER SAW BLADE. . . . CUTS GROOVES CLEANER, EASIER AND FASTER THAN ANY DADO CUTTER ON THE MARKET . . . MICROMATIC ADJUSTMENT PERMITS A CUTTING ANGLE CHANGE IN 15 SECONDS . . . SAW BLADE HELD RIGID . . . WILL NOT CHATTER . . . WARREN DADO SAWING WASHERS CAN BE LEFT ON THE ARBOR OR QUICKLY REMOVED FOR CUT OFF SAWING. . . . ORDER YOUR SET OF FOUR WASHERS TODAY. TRY THEM FOR TEN DAYS. IF NOT SATISFIED, YOUR MONEY WILL BE REFUNDED IN FULL. DEALER INQUIRIES INVITED

Arbor ☐ ½ ☐ ⅝ Sizes ☐ ⅝ ☐ 1
☐ Free Circular
☐ Check
☐ Money Order

Gentlemen:— Please send ____ sets of sawing washers
Name .....
Address .....
City ..... State .....
ALL SETS SHIPPED POSTPAID 49

WARREN DADO SAWING WASHERS CO.
P. O. BOX 98 NORTH END STATION
DETROIT, MICHIGAN

HEAVY CAST ALUMINUM DOUBLE EXHAUST BLOWER

Only $15.85



Install it yourself with any household tools. Double intake and exhaust from 2 balanced wheels. Flanges for attachment to ducts. Cont. duty motor is extraordinarily quiet. 110 V., A.C. 50-60 cycles. Heavy duty cord attached.

SINGLE EXHAUST BLOWER—same heavy cast alum. construction as DOUBLE—$10. Add 50c handling; $1 west of Miss. Send check, M.O. Money Back Guarantee. Free lit.
UNIVERSAL YONKERS CORP. (S-9), 137 Alexander St., Yonkers 2, N. Y.

DRIVE WITH NO SUN GLARE

THE ACE AUTO VISOR makes driving more restful and safer . . . no sun in your eyes . . . protects windshield from rain, snow, fogging and bug spatters. Streamlined design with Heavy Chrome Ends and Center Chrome Strip adds beauty to your car. Specify: ☐ Prime finish for painting. ☐ Hi-polish metal finish—requires no paint.

Enclose money order and save freight . . . or order C.O.D., freight collect.

Easy to Install. No Holes to Drill. Heavy Chrome Ends. Center Chrome Strip. Clear Vision Sides.

ORDER BY MAIL AND SAVE . . . $13.50
IMMEDIATE DELIVERY
ACE AUTO PRODUCTS, DEPT. PS9
BOX 366 HUNTINGTON PARK, CALIF.

A NEW KIND OF MOTORCYCLING WITH

JAWA

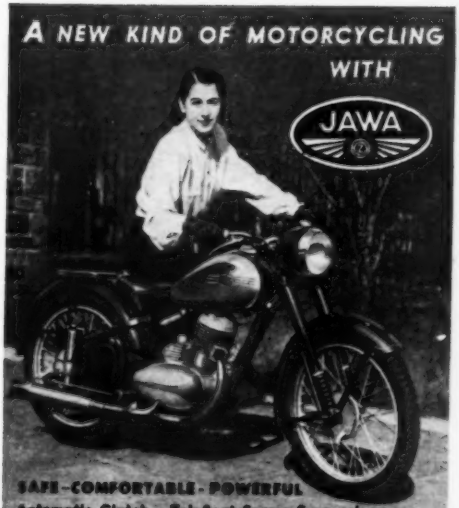

SAFE-COMFORTABLE-POWERFUL

Automatic Clutch. Telefout Spring Suspension. Foot Gear Shift. 95 miles per gallon. 70 Miles per hour.

See and drive it at your nearest JAWA DEALER or write for free folder.

JAWA MOTORCYCLE CO.
Dept. S,
460 FOURTH AVE., NEW YORK 16, N. Y.

DEALER INQUIRIES INVITED

CURIOUS?
About a
SHIP-IN-A-BOTTLE?

Here is the secret plus all of the material for only 75c postpaid, less bottle. Also send 10c for complete catalog and ask your dealer about this kit.

BRAUN-CRAFT 1232 Etowah, Dept. PS-9, ROYAL OAK, MICHIGAN

75c Postpaid in U.S.A.

MAKE YOUR OWN TABLES!

FREE! "How-to-do-it" Woodworking Plans. Complete instructions and diagrams for easy-to-make handsome end tables, hampers, sewing cabinets, etc., for your home, for gifts. A full size jar of famous Rogers "Gorilla Grip" Glue included. Same as used by cabinetmakers. Makes furniture, toys last a lifetime.

Take advantage of this special offer . . . send 10c today to Rogers Isinglass & Glue Co., Gloucester, Mass.

ROGERS
the best LIQUID FISH GLUE
GLOUCESTER, MASS.

NEW Atlas 24" JIG SAW

AN INDUSTRIAL TOOL FOR AMBITIOUS HOME SHOP MEN



This is the jig saw many of America's real craftsmen have long been waiting for. It's big enough to handle any practical jig-sawing project you want to tackle . . . precisely built for professional workmanship . . . just what you need if you plan to make your shop pay you a profit.

Artistic furniture, valances, toys, inlaying, costume jewelry of plastic, bone, ivory, metal . . . whatever you want to make . . . the big 14" x 14" tilting table, 4 speeds, wide blade and sabre capacity, and smooth operation of this new Atlas will help you do your best work. Full details gladly sent. Write today.

Send THIS COUPON OR POSTCARD FOR FREE LITERATURE ABOUT NEW 24" JIG SAW.

Name_____
Address_____
City, State_____

ATLAS PRESS CO.
955 N. Pitcher St., Kalamazoo, Mich.

MATCHED PRECISION TOOLS FOR MACHINING AND WOODWORKING

Flex-O-Shaft

HANDLES LIKE A PEN*

$35.00

FLEX-O-SHAFT is an improved all-purpose machine for homes, schools, shops, or factories. The slender, light-weight aluminum hand piece is ideal for grinding, drilling, sawing, buffing, scoring, etching, polishing, and scores of other uses. There is no bulky, throbbing, pulling motor in your hand. The light-weight motor can hang on the wall, or can be set down on working table. Speed is controlled by foot-operated rheostat, leaving hands free. This precision ball-bearing tool is as easily guided as a pen, speeding up operation because of ease in handling. It is a wonderful, compact, power house for making all kinds of objects. This unit consisting of Flex-O-Shaft with 6-ft. cord, 1/16 H. P. Motor, Rheostat with cord and plug, all for $35.00. Send for complete information today! Use coupon below.

FLEX-O-SHAFT and complete Tool Kit with 66 accessories ONLY **$50.00**

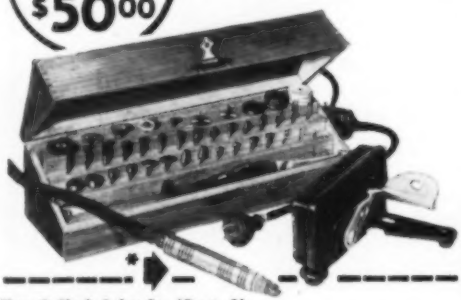

Flex-O-Shaft Sales Co. (Dept. C)
Prairieview, Illinois

☐ Please send complete information on the Flex-O-Shaft Kit.
☐ Please send one Flex-O-Shaft Kit. $50.00 enclosed. Shipping charges C.O.D.

Name .....
Address .....
City ..... Zone ..... State .....

WINDMILL-RAINBOW-FLASHER

SPINNING AUTO LIGHT

Patented

• Spins with the wind. The most beautiful light in the world. Red, White & Blue. Everybody wants one. Easily put on Auto, Bicycle, Airplane or Boat. Pay mailman $2 plus postage or send $2 and we pay postage. Be first. Agents wanted.

SPIN LIGHT CO.
373 B. Belmont Ave. Paterson, N. J.

STAR UNIVERSAL *NO-LEAK* TESTER

Test CONTINUITY **ON THE SPOT**, anywhere in factory or home. No batteries. Just plug into any 110 volt receptacle. Locate open circuits, dangerous grounds in motors, fixtures, etc. Vest pocket size—wt. 2½ oz. Also unexcelled for line testing. 110 to 600 volts.

A NECESSITY for Electricians, Maintenance Men, Home Owners

No-leak neon lamp in one test prod shows definitely what is wrong . . . and where. At most dealers, or direct from us postpaid **$2.50**

FREE Illustrated Folder on Request. Address Dept. PS

STAR FUSE CO., 233 Canal St., New York 13, N. Y.

NEW 1948
Plastics Supplies Catalog

Just off press. Full details on Plexiglas, Lucite, rods, sheets, tubes. Acetates, cements, dyes, buffs, molding sets, tools, carving kits, accessories. Everything in plastics. Gives prices, sizes, colors, etc. Price 10c, stamps or coin, with ad for catalog.

PLASTICS MFG. & SUPPLY CORP.
Dept. S-9 4707 Euclid Ave. Cleveland 3, Ohio

WRITE NOW FOR FREE CATALOG NO. S-023

THE Foster LINE

POWER TOOLS

FOSTER MFG. CO., 1 KINSEY AVE., BUFFALO 17, N. Y.

CLOSEOUT!!!

110 V-AC Heavy Duty **MOTORS**



Brand New, Fractional HP Ideal for Models, Fans, etc. Never again at this price. 100 practical uses. **$3.95** f.o.b. N.Y.C. 10 for $35.00

Send Check or M.O. no C.O.D.'s

MANUEL KLEIN 74S CORTLANDT ST. NEW YORK 7, N. Y.

5,000,000 FEET OF LUMBER @ $35 per M.B.M.

One man did it. You can too, with a BELSAW All-Purpose Sawmill. Replace or repair farm buildings with your own well-finished, low-cost lumber. Portable BELSAW goes to the trees, brings back ALL the lumber for ALL your buildings . . . boards, joists, lath, shingles.

Send For FREE Book

BELSAW MACHINERY CO
2846S Field Bldg., Westport Rd., Kansas City, Mo.

ATKINS *Silver Steel* SAWS

FOR MEN WHO APPRECIATE THE BEST

- HANDSAWS
- HACK SAWS
- CIRCULAR SAWS
- BAND SAWS
- ALL OTHER TYPES

E. C. ATKINS AND COMPANY, Indianapolis 9, Indiana

SAVE MONEY

GOV'T SURPLUS

PUMPS

Brand New
In Original Crates
2", 4", 6"—Marlow & Carver
Gas Engine Driven
Cap. 55 g.p.m., to 525 g.p.m.

LOWEST PRICES EVER OFFERED

FREE 10 gal. all steel gas tank—with each order. Write for circular—state size or output required.

MIXING MACHINES

Brand New! Dough, feed, paint, all uses. Briggs and Stratton engine. Variable speed—automatic unloading. $96.50 f.o.b. Brooklyn.

Write for circular or send 25% deposit—remainder C.O.D.

Benjamin's For Motors

2100 MILL AVE. BROOKLYN 10, N. Y.

Sand Casting—Forging—Heat Treating—Case Hardening

BRONZE FOUNDRY

In your own workshop allows you to design and build your own GASOLINE ENGINES, STEAM ENGINES, STATUARY, ART OBJECTS, SPECIAL TOOLS, NEW INVENTIONS, ETC. You can also make forgings and case harden steel. Your shop is not complete without a FOUNDRYETTE. Three sizes are available capable of making bronze castings of 1½, 3 and 6 pounds weight, aluminum, copper, brass, etc., $22.50, $29.50, $42.00 f.o.b. Kansas City. Domestic gas supply and 110 volt AC or DC energy required for operation. Write for circular.

KANSAS CITY SPECIALTIES CO.
Box 6022, Dept. S-8 **Kansas City, Mo.**

---

1 M.A. METER

$1.95 NEW

APN-1-Altimeter Indicator—An excellent 1 M.A. basic movement with a built-in 5 M.A. shunt—270° scale for easy reading. Made by General Electric for Air Corps at original cost of over $30.00. A good basic instrument for constructing your own ammeter, voltmeter, ohmmeter, etc. Install your own shunts, multipliers and scales. Include $.25 for postage and handling.

METER RECTIFIER, full wave midget Selenium, 10 volts, 30 M.A., N-1.....$ .29

PHOTOCON SALES, Dept. PS-9
1062 N. Allen Avenue Pasadena 7, California

Complete New

SUPER POWER TOOL KIT

Built by DURO

ONLY $19.95

Complete With Power Unit, 5 Accessories, Sturdy Case and Full Instructions

America's Greatest Power Tool Value!

Hobbyists, home craftsmen—this is the power tool kit for you! Heavy duty DURO super power unit does cutting, grinding, polishing, engraving, carving and scores of other operations. Smooth, vibrationless in operation . . . this DURO power unit runs at 20,000 RPM—develops 42 watts output. Complete power tool kit contains the power unit with cord, 5 abrasive points and cutting burrs and full operating instructions—for only $19.95.

FLEXIBLE SHAFT MEANS ADDED UTILITY!

New DURO flexible shaft with ball bearing hand piece makes engraving, free hand carving, sanding, easier, lots more fun. Double the utility of your DURO Super Power Tool Kit with this useful flexible shaft for only **$13.95**

You can start with this LOW COST Power Tool Kit . . . and BUILD A COMPLETE HOME WORKSHOP

One DURO super power unit is used on all of these home workshop tools! You may buy them singly—or in a group.



WRITE FOR FREE CIRCULAR giving full details on the *Super Power Tool Kit* and the new, low cost home workshop units.

DURO METAL PRODUCTS CO.
2688 N. KILDARE AVE., CHICAGO 39, ILL.

NEW FOREDOM Model #99 at an Amazing LOW PRICE

FLEXIBLE SHAFT MACHINE with PENCIL-SIZE HANDPIECE

$15.95 COMPLETE WITH MOTOR

Grinds, Polishes, Cleans, Sharpens, Mills, Carves, Engraves, Etches on Metal Wood, Glass and Plastic

5 REASONS WHY FOREDOMS ARE TOPS:

1. Extra power and longer motor life because motor not dwarfed to fit hand. 2. Correct handpiece size for deft, sensitive, finger-tip control. 3. No obstructed view of your work. 4. Freedom from gyroscopic action—hence better work. 5. Small handpiece size lets you get into hard-to-reach places.

Hundreds of Uses

Foredoms handle hundreds of tasks. Use them for pleasure or profit, for tinkering or expert craftsmanship. Their versatility is unlimited. Use them to grind, polish, mill, engrave, sharpen, slot, rout, saw, carve, clean, sand, etch, cut, etc. Ideal for internal carving of plastics, the astounding new craft. You can work on wood, glass, plastic and all metals with a Foredom. No. 25 Accessory Set (A truly versatile assortment) only $5.50 extra.

Over 70,000 Foredoms now in use

Foredom PRESTO-FLEX with PENCIL-SIZE Handpiece $5.95

Now turn your old motor, drill press, or electric drill into a Flexible Shaft Tool. Simply attach to your electric drill, drill press or motor. Presto—a flexible shaft machine! Off again in a jiffy! Pencil size handpiece gives you finger-tip control. Gets into tight places you can't reach with any other tool. Handy 35" overall length. And—only $5.95 complete! Not to be confused with inferior imitations. Precision made, backed by ¼ century experience in this field. All parts replaceable. Order NOW. If ordered for use on motor, specify motor shaft diameter and add 50c for coupling. (Available for ¼", 5/16", ⅜", and ½" shafts.) No. 50 Accessory Set Available $1.50 extra. Order TODAY.

FOREDOM ELECTRIC CO., Dept. B-109 — Mail Coupon Now
27 Park Place, New York 7, N. Y.

Please send me FOREDOMS checked below on 10 day trial.

- ☐ Presto-Flex Tool ($5.95)
- ☐ Motor Coupling (50c)
- Specify motor shaft diameter...
- ☐ Flexible Shaft Machine ($15.95)
- ☐ No. 50 Accessory Set ($1.50)
- ☐ No. 25 Accessory Set ($5.50)
- ☐ Catalog on request
- ☐ I enclose payment. Send postpaid.
- ☐ Send C.O.D. plus postage. I will pay postman.

(Money back either way if not delighted)

Name.....

Address.....

City.....Zone.....State.....

7 x 50 PRISM BINOCULARS

BRAND NEW

$48

With Coated Lenses & Prisms

$58

Plus 20% Tax

Ultra-precise optics, made to rigid military specifications. Sealed against moisture and dust in lightweight aluminum bodies. Richly finished case and straps included. Money-back guarantee. Immediate delivery. We pay postage.

BROWNSCOPE CO.

Dept. 9P — 24 West 45th St. — New York 19, N. Y.

PRICE **$2.80**

The Original *E-Z* DRILL SHARPENING FIXTURE

(PAT. NO. 2411,609)

Sharpens drills 3/32" to 1 1/2" dia. to factory precision in 30 seconds. Made of cold rolled steel (no pot metal). Aluminum protractor. Production or home workshop.

E-Z MFG. CO. 4408 San Fernando Rd. Glendale 4, Calif.



HOUSE PLAN TEMPLATE

Simplifies Plan Drawing

Made of clear sheet plastic, with accurate cut-outs for drawing door-swings, plumbing and electric fixtures, fireplace, stairs, molding, roof-pitch, etc. Standard ¼" = 1'-0" scale.

$1.50 POSTPAID

TIMELY PRODUCTS CO.
Box 206L, Columbus 9, Ohio

NOW! 3-Way Drill Point Gauge

Amazing new gauge measures drill point angles from 45° to 75°—clearance 6° to 15°—chisel point 117° to 135°. Chart, showing proper point angles for various materials, included. No more guessing! Be accurate! Nothing like it! Order today: sent postpaid (U.S.). Satisfaction guaranteed.

$2.50

SWANSON PRODUCTS INC.
2929 N. Pulaski — Chicago 41, Ill.

Would You Believe It? **POWER TOOLS**

Only $7.00 Each?

5 big capacity power tools in one machine: lathe, drill press, circular saw, grinder and sander. Equal to equipment costing five times as much—uses ¼ to ½ H.P. motor. Factory-to-you only $34.95 complete. Send $17.50 (balance COD) on 10-day FREE trial, money-back guarantee, or write for FREE catalog.

EMRICK, INC., 1759 Clinton, Kalamazoo, Mich.

World Headquarters for **HOT ROD** *and* **RACING** *Equipment*

SPEED STACKS

Wind Tunnel Design Guaranteed to INCREASE POWER, SPEED, MILEAGE, APPEARANCE. Fits all carburetors. Polished aluminum, with bright red trim.

POSTPAID $1.95 EACH

Hydraulic Brake Conversion Units FORD A-B and through '38

Install Hydraulic Brake system now — Be SAFE. Complete kit includes everything needed — Cylinders, backer plates, lines, spacers, brackets, hoses, fittings, easy-to-follow instruction and etc. Easy to install in 3-4 hours. Money back guarantee.

ORDER DIRECT AND SAVE!

Complete kits only $65.00 F.O.B. Los Angeles. Check, Money Order, etc. 25% deposit on C.O.D.

Streamline your Ford

Lower the body with our special shackles. Easily installed. Gives car that fast, low racing look. Set of 4—$1.50 Lower your Chevrolet—$9.00 per set. (Specify 4" or 6" shackle)

FREE—HISTORY & CATALOG with order.

We supply everything you need to build your own Track Cars — Hot Rods and Boats — the ideas, technical data and equipment. Start Today — Order Speed STACKS and Streamline SHACKLES, RACING HISTORY and CATALOG 25c without order.

HISTORY OF HOT ROD AND HIGHLY RACING AND CATALOG 25¢

ANSEN AUTOMOTIVE ENGINEERING CORPORATION
3801 W. Jefferson — LOS ANGELES CALIF.

THE BULL BUFFER

PAT. PEND.

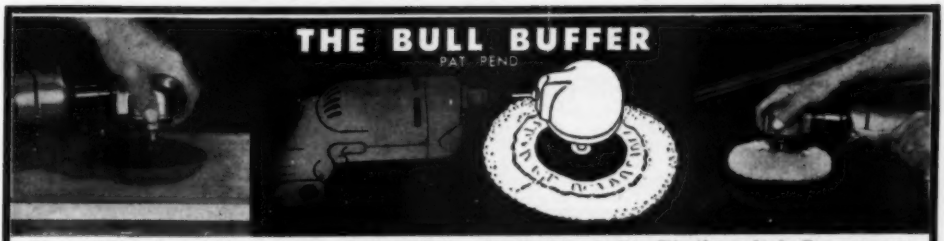

You polish and sand faster, easier — do beautiful, *professional* work—with this amazing new attachment for your hand drill. And it more than pays for itself *the very first time* you polish and sand your car, floors, woodwork, furniture.

The Bull Buffer fits any chuck on an electric drill (or flexible shaft). It's the only buffer you can turn *in a complete circle* while you hold your hand drill stationary. Reaches all curved and flat surfaces. It's packed with power, built of lifetime materials and *guaranteed*.

If your dealer doesn't stock, send cash, check, or money order for your Bull Buffer, complete as pictured below..... **$9.95**

ORDER THESE ACCESSORIES FOR YOUR BULL BUFFER:

Cup wire brush attachment for removing paint from that hard-to-scrape surface, **$1.75**

Jacobs key chuck increases ¼" drill to ½" capacity—reduces speed, increases power. **$5.00**

Bull Buffer car cleaner	$ .50
Bull Buffer car polish	1.00
Extra sheepskin bonnet	1.25
Extra sanding discs (000-00-0-1-2½-3-4)	.10
½" Jacobs No. 6425 key chuck (see photo)	5.00
2½" cup wire brush (see photo)	1.75

Bull Buffer comes complete with 5-inch rubber disc, sheepskin bonnet, and 2 sanding discs, only **$9.95.**

BERTRUM E. ENGINEERING COMPANY

3121 MAIN ST. *Dealers write for information* **KANSAS CITY, MO.**

French Type Phone

TS-13C HAND SET

With butterfly switch on handle. When the switch is pressed, the microphone is connected into the circuit and an additional set of contacts are closed, to operate a change over relay. Has a 6 ft. length of cord, with a PL 55 plug for earphone and PL 68 for microphone and switch. Impedance of earphone approx. 2500 Ohm; impedance of microphone approx. 250 Ohm (carbon); connected with batteries it can be used for intercommunication system. They are brand new and the original cost is many times what we are offering them to you . . . while they last.

$3.95

MICHAEL STAHL, Inc., 39 Vesey St., Dept. PS9, New York 7, N.Y.

FREE for Trailer Builders

Safety-Engineered

• TORQ-LESS AXLES • BULL DOG HITCHES AND PARKING JACK LITERATURE

HAMMER BLOW TOOL CO.

D-28 • WAUSAU, WIS.

FREE . . . WRITE TODAY!

The New Improved All-Purpose

DYNAMIC Super Charged ARC WELDER

Industrial Transformer Type

IT WELDS ● IT BRAZES ● IT SOLDERS

IDEAL FOR AUTO—HOME APPLIANCE AND FARM REPAIRS. This portable, industrial transformer type welder easily carried right to the job **can be operated from any convenient** properly wired **110 Volt 60 Cycle Line.** Can also be supplied for 220 volt 60 cycle operation and other voltages and cycles at slight additional cost.

EASY-TO-OPERATE. If inexperienced you can easily learn to do a variety of high grade welding jobs by following the practical, simplified **Welding** and **Operating Instructions furnished.** Once you see the **DYNAMIC WELDER** in operation you won't want to be without it. Its simplicity will amaze you. In a year the **DYNAMIC** only costs you about 7c a day. Comes complete ready to operate with helmet, rods, cables, holder, operating and welding instructions, etc.

SAVES YOU VALUABLE TIME AND MONEY!

DESIGNED TO DO HIGH GRADE WELDING inexpensively—Maintenance Men, Farmers, Mechanics, Machine Shops, Foundries, Auto, General Repair and Job Welding Shops, all using the **DYNAMIC** find it so indispensable and useful that they can not afford to be without it. **Works on Iron, Steel, Brass, Bronze and Other Metals.** Has 8 metallic and carbon arc heat stages. Does work you would think only possible with a larger, more expensive machine.

ONLY $28.50 COMPLETE

DO YOUR OWN WELDING

Just a few repair jobs will pay for this machine. A practical and profitable machine tool for any workshop. Make money doing repair work for others.

Write for Particulars

Get Details on our 10 day Trial Offer

Member Chicago Association of Commerce.

DYNAMIC WELDER CO., 15 East 23rd Street, AN, CHICAGO 16, ILL.

SPECIAL GIFT OFFER! ARC TORCH WORTH $6.80 YOURS at NO EXTRA COST!

TWIN CARBON TORCH (illustrated) for use with DYNAMIC is unsurpassed for brazing, soldering, pre-heating and cutting iron, steel, brass, bronze and other metals. With it you greatly increase profitable uses of your welder. Does work of oxy-acetylene torch. Comes complete with instructions, carbons and cables. For LIMITED TIME ONLY we are giving a Twin Carbon Electric Arc Torch worth $6.80 with every DYNAMIC WELDER. Act now to get this valuable premium at the single low price of welder alone.



—*Mail Coupon* FOR FREE FACTS—

10-DAY TRIAL OFFER

Dynamic Welder Co., 15 E. 23rd St., AN, Chicago 16

Send me FREE details of your ELECTRIC Arc Torch Gift Offer and Dynamic Welder 10-Day TRIAL OFFER.

NAME _____

ADDRESS _____

CITY _____ ZONE _____ STATE _____

BOICE-CRANE POWER TOOLS

for shop men and homecraftsmen.

Write for literature on this versatile, low-cost, sturdy line.

BOICE-CRANE COMPANY
944 Central Ave., Toledo 6, Ohio

NOW!...

CARRY GARMENTS IN YOUR CAR WRINKLE-FREE!

Hartal Car Rack

Snaps on in a few seconds. No tools needed

The only car rack installed without bolts or screws. Will not damage car or upholstering. Fits any car. Automatically adjusts to any body—torpedo and etc. The heavier the load the tighter it holds. Fits high up near top of car. Plenty of headroom for rear passengers. Pays for itself in saving on pressing bills. Ideal for CLEANERS DELIVERY — TRAVELING GARMENT SALESMEN — TOURISTS — ARRIVE WITH CLOTHES WRINKLE FREE. Money back guarantee. Thousands in use. ORDER NOW!

$6.95 EACH
Postpaid
$2.00 deposit on C.O.D.
Distributors Wanted

COOLIDGE
2508 W. SLAUSON AVE. LOS ANGELES 43, CALIF.

CAMERAS

COLOR *Candid Type* CAMERA

NOT A TOY But A Real Camera—Lifetime Guarantee

Amazing MONEY SAVING Offer Gives you this NEW "*THE CHAMPION*" Model with Latest Features . . .

COLOR *Candid* CAMERA

- Guaranteed for Life-time Service!
- Fixed focus! Exposure automatically correct at all times.
- QUICK-Action, level view finder! Just sight and snap!
- Takes full NATURAL Color pictures, indoors or outdoors!
- Takes 16 black-and-whites on ordinary 8-exposure roll!
- New film track brings entire picture to sharp focus. $10.00 Value.

ONLY **$2.00** POSTPAID

C.O.D. Orders Send $1.00 Deposit

FREE If you order today 1 year's subscription to Philadelphia Home Mail Order Monthly.

HOME SERVICE BUREAU
622 Penfield Bldg. P-5 Phila. 7, Pa.

MOTO-TOOL ★ *THE "POCKET-SIZE"* MACHINE SHOP

ELECTRIC DREMEL POWER TOOLS



A TESTED TOOL THAT PACKS YEARS OF PLEASURE

If you get a kick out of making things, you'll have fun with a Moto-Tool. It grinds, drills, routs, carves, polishes . . . does work better, faster . . . on practically any material. Moto-Tool is backed by 10 years of successful industrial service . . . also used by every branch of the Armed Forces. Compare Moto-Tool with other grinders and see for yourself why it's better.

10 Reasons Why Moto-Tool's a Better Buy

Oil-less, sealed bearings ● Patented automatic chuck lock pin ● Oversize armature shaft; hardened, ground, polished ● 110 Volt, AC-DC motor ● Sliding snap-type switch ● Handy hanger hook; cord protector ● Shock-proof bakelite housing ● Dust-filtered air-cooling system ● Dynamically balanced for vibrationless operation ● Weighs only 13 oz.

Approx. 27,000 R.P.M.

PRE-WAR PRICES STILL PREVAIL

Moto-Tool Kit No. 2, $30.00; you save $6.50.) with 23 accessories (high speed steel cutters, grinding wheels, polishing accessories) and heavy-duty professional Model 2 Moto-Tool in natural-finish, hardwood case **$23.50** (Items purchased separately would cost about

Moto-Tool No. 2, with one emery point **$16.50**

Moto-Tool Kit No. 1, with 34 accessories and Model 1 Moto-Tool in wood case . . . **$17.50**

Model 1 Moto-Tool, with one emery wheel point **$9.85**

MONEY-BACK GUARANTEE

Buy Dremel Moto-Tools from your dealer. If he cannot supply you, order direct from the factory on 10 day trial, money-back guarantee. Shipped postpaid for payment in full (send check or money order); or send only $2., we will ship C.O.D. You pay postman balance plus postage. Catalog of Moto-Tools and Accessories FREE.

DREMEL MFG. CO.
Dept. 128-J Racine, Wisconsin

***New* DREMEL DRILL PRESS**

ONLY **$9.95**
(Less Moto-Tool)

Here's a portable, precision drill press at an amazingly low price. Just the thing for creating costume jewelry, model making, wood carving, routing, etc. Utilizes Model No. 2 Moto-Tool, which can be raised or lowered, swung in any direction, or quickly removed for off-hand use. Drill Press stands 12" high. Base is 6¾" x 4". Weighs approximately 3½ pounds.

Amazing 2 for 1 Offer!

Paint Your Car with LUSTR WIPE

THE MIRACLE NEW AUTO ENAMEL THAT

WIPES ON WITH A POWDER PUFF!

Fix Body and Fenders

WITH DURO AUTO BODY SOLDER AT NO EXTRA COST!

BOTH
LUSTR-WIPE New Auto Enamel and DURO Auto Body Solder
AT ONE PRICE

only $3.95
Applicator Furnished

SEND NO MONEY MAIL COUPON NOW

ONE QUART OF LUSTR WIPE PAINTS YOUR ENTIRE CAR
Anyone Can Do a Beautiful Job

LUSTR-WIPE is different than any auto enamel you ever tried. WORKS LIKE MAGIC! Almost ANYONE can paint his own car and get a high gloss finish that looks like a professional spray job. JUST WIPE IT ON with a powder puff. NO BRUSH, NO SPRAY, NO MASKING. NO STREAKS, NO LAPMARKS. Takes about an hour to get a brilliant "factory-finish." Dries dust-free in an hour. Goes over any enamel or lacquer.

BLACK	$3.95 Qt.
GREY (Gunmetal-Dark or Air Wing-Light)	3.95 Qt.
GREEN (Brewster-Dark or Jewel-Light)	3.95 Qt.
BLUE (Washington-Dark or Monticello-Light	3.95 Qt.
RED or MAROON or SUN BEIGE (Tan)	3.95 Qt.

NO BRUSHING
NO SPRAYING
NO MASKING
NO STREAKS

GUARANTEED FOR 2 YEARS
Not to crack, chip, peel or fade if simple directions are followed. LUSTR-WIPE is NOT a wax or polish but a marvelous Auto Enamel.

SEND NO MONEY! ORDER TODAY
Mail penny postcard. Then pay postman for LUSTRE WIPE plus postal charges. DURO Auto Body Solder will be included AT NO EXTRA COST. Or if you send money with order, WE pay postage.

A Can of DURO GIVEN with Every Quart of LUSTR-WIPE

DURO PLASTIC METAL BODY SOLDER

FIXES FENDERS AND BODIES LIKE NEW

DURO is foolproof—EASY TO USE. Fixes rust spots, cracked and dented fenders, body dents and rusted out holes QUICK AND EASY. Just apply right out of the can with putty-knife. Dries to metallic hardness overnight. Can be filed down smooth, sanded to the same finish as metal and painted. You never know it's there.

Fenders Rusted Out?

LUSTR-WIPE CORP., 166 W. WASHINGTON ST., CHICAGO 2, ILL.

AGENTS AND DISTRIBUTORS WANTED
Write for tried and tested money-making plan. Also our special quantity prices.

LUSTR-WIPE CORP., 166 W. WASHINGTON, DEPT. 95, CHICAGO 2, ILL.
Please send me _____ qts. of LUSTR-WIPE Auto Enamel at $3.95 Qt.
With each quart include a can of DURO Auto Body Solder AT NO EXTRA COST.

COLORS _____
☐ Send Postpaid, Full Payment of $ . . . . (check or M.O.) enclosed
☐ Send C. O. D. plus Postal Charges
☐ Send Information for Agents

NAME _____
ADDRESS _____
CITY _____ ZONE ____ STATE _____

NEW! 5-POUND, 37-INCH AUTOMATIC CARBINE

RIFLE $26.95
$27.80 west of Rockies

BRAND NEW DESIGN — Another Mossberg "first". Carbine-style, .22 cal., 7-shot, clip type automatic, with HINGED FORE-END. Model #152.

In prone shooting fore-end gives helpful ground support.

There's no other rifle in the world quite like this new Mossberg #152. It's well worth a trip to your dealer's to see it.

Scope shown is Mossberg 4-power Model #4M4, $9.95

Send for descriptive folder

O.F. Mossberg & SONS, INC.
89709 St. John St., New Haven 5, Conn.

Say You Saw
It In Popular Science

Build YOUR OWN LOG CABIN!

$425 to $5,000

Shipped In Sections —Ready to Erect

Build your log cabin yourself and save money! Braun Cabins (Patent No. 2320466) come to you prefabricated in sections, lettered and numbered—easy to erect. Beautiful Michigan White Cedar vertical half-logs, machined and splined. Weathertight joints. Interior—knotty cedar. Many designs to choose from, as low as $425, F.O.B. Detroit — or we can adapt our material to your plan. Prompt shipment. Send 25c for 24-page Catalog, including overnight and guest cabins.

Send 25c for Catalog

BRAUN LUMBER CO.
CEDAR CABIN DIVISION
1573 E. Davison Detroit 3, Mich.

BRAUN CEDAR CABINS

Sensational SHAPER CUTTER
For Endless Molding Contour Designs

Employs exclusive double notched sets of full 1" and ½" split blades. Blades automatically held in position by notched design and in absolute alignment. No set screws to loosen; blades cannot fly out. Provides endless varities of standard and special contours. Specify type of spindle on drill press or shaper. Available in six standard adapter sizes. Ten-day money back guarantee. Complete literature on request.

$9.00 Complete with 3 sets of Hi-speed Tool Steel Cutters

TOOLS FOR USE ON ALL DRILL PRESSES

ROTARY WOOD PLANERS — ROTARY SURFACE SANDERS
ALL-METAL SHAPER FENCES — DRUM SANDERS
SPINDLE ADAPTERS — AUXILIARY DRILL PRESS TABLES

FREE Power Tool CATALOG

BARRON TOOL COMPANY, INC,
270 Architects Bldg.: Detroit 1, Mich.

BARRON PRECISION WORK SHOP TOOLS

CRAFTSMAN'S GUILD September Features
HARD-TO-GET CRAFT MATERIALS
YOURS FOR THE ASKING

EVER TRY TO GET STARTED ON A PROJECT AND FIND YOU COULDN'T GET MATERIALS LOCALLY? That needn't happen again. Just write to the Craftsman's Guild for further information about:

- WOODS—fine selected kiln-dried hardwood, walnut, mahogany, plywood, lumber core stock, etc.
- HARD-TO-GET HARDWARE—Decorative hinges, brackets, knobs, finished screws, etc.
- FINISHES • STAINS • MOLDINGS • FILLERS • VARNISHES

HOBBY GIFT KITS—50c and up
Explained & illustrated in our free catalogue

ALSO STILL AVAILABLE, Complete Electric Sewing Machine Kit, as advertised in June Popular Science. Transform backbreaking treadle machine into a beautiful modern, easy-stitching Electric Machine. Save up to $125 over cost of new machine. Everything you need from finest woods to finishes for cabinet, and electrification unit. Complete for $49.50. Cabinet Kit only: $32.50. Electrification Unit only: $17.95.

SEND TODAY for Free Catalogue (enclose only 3c to cover postage)

CRAFTSMAN'S GUILD, Marlboro, New Jersey

3-Pc PAINT STRIPE SET Only $1.00

3 SEPARATE TOOLS—
EACH MAKES DIFFERENT WIDTH

Stripe perfect lines—straight, curved, with any paint, lacquer, enamel, easy as drawing lines with ruler! Beautify furniture, toys, autos; make signs and imitation tile. Simple instructions included.

SEND NO MONEY. Mail order. Pay postman only $1.00 plus postage. If not delighted return in 5 days for money back. Order Now.

STRADER MFG. CO., Dept. B-352
259 Strader Ave. Cincinnati 26, Ohio

A Sensational Value! Complete Sanding and Polishing Kit

ONLY $2.95

Will Fit Any ¼"-Inch Size Electric Chuck

Drill, Polish and Sand Combinations:

Black & Decker Home Utility ¼" Drill with Kit . . 21.90
Speedway Blue Line No. 69 ¼" Drill with Kit . . 14.75

Set includes two 5" discs, one 6" polishing bonnet, rubber cement, sand paper and instructions. Ideal for workshop or home. A good gift idea. Dealers' Inquiries Invited.

Order Now! We pay all mailing charges with Money Order or Check. Postage extra with C.O.D.

NEDRO SALES CO., Dept. PS 1, 102 N. 11th St., Phila., Pa.

RADIOMEN'S HEADQUARTERS ✧ WORLD WIDE MAIL ORDER SERVICE!

COMPRESSED AIR INSTANTLY, Anywhere!!



Portable Air Compressor and storage tank. Ruggedly built of best materials using lifetime lubricated ball-bearing on connecting rod and oil impregnated main bearing on shaft. Unusual design forever eliminates valve trouble, the most common fault in air compressors. **PATENTED** unique air intake system increases efficiency tremendously over other compressors so that air output is much greater than that from larger compressors powered by heavier motors. Will deliver appr. 3500 cu. in. air per min. at maintained pressure of 30 lbs., or will inflate a 90 lb. truck tire in less than 1 min. Complete with 100 lb. gauge, fingertip adjustment allows setting of output pressure at any value, which will automatically be maintained. Works from any 1/4 H.P. motor. Useful for spraying paints or lacquers, disinfectants, insecticides, annealing or brazing with natural gas, inflating tires, etc. Price $14.50 postage prepaid anywhere in U.S. Efficient, adjustable syphon type spray gun complete with 12 ft. of 100 lb. tested hose for only $7.75 with pint container, also prepaid. 25% required on C.O.D. orders. Send for free catalogs of radio parts and surplus items.

ALUMINUM GEAR BOX 18x8x7 that contains two powerful electric motors and two matched gear trains, 62 gears in all varying in size from 1/2 to 4 inches in diameter. This unit is readily converted to rotate a beam antenna or for any other similar use.....$3.00

Sensational Value In AC-DC Pocket Tester



This analyzer, featuring a sensitive repulsion type meter housed in a bakelite case, represents the culmination of 15 years achievement in the instrument field by a large company specializing in electronic test equipment.

Specifications of the AC-DC Model Volt-Ohm-Milliammeter:

AC Volts—0-25,50,125,250
DC Volts—0-25,50,125,250
Milliamperes AC—0 to 50
DC Milliamperes—0 to 50
Ohms Full Scale—100,000
Ohms Center Scale—2400
Capacity—.05 to 15 Mfd.

Total Price, prepaid anywhere in the USA—**$7.00**

Similar DC Meter, lacking the AC operated ranges of above, **$5.50** prepaid

RT-1248 INTERCOMMUNICATION TRANSCEIVER

This brand new 15 tube transmitter-receiver was designed for mobile service on 12 volts, and will operate in the "Citizens' Band," where no govt. license to transmit is necessary. It's a cinch for any radioman or amateur to connect this unit for 110 VAC operation by following the instructions and diagrams supplied, which cover numerous applications, including television. For those intending to use on car or boat, a new dynamotor, exactly as originally supplied, costs only $15.00. Don't fail to write for **FREE** descriptive bulletin. RT 1248 transceivers only **$29.95 each**, or **two for $53.90.**

TERRIFIC VALUE

ONLY

$19.95

Equipped with 1/4" Jacobs Geared Chuck and Key

PORTABLE ELECTRIC DRILL

(Sold at less than established factory price so we cannot mention brand name)

Not an intermittent duty drill, but a full size rugged tool. Most convenient type switch, natural grip handle, and balance like a six shooter. Precision cut gears—turbine type cooling blower—extra long brushes. No stalling under heaviest pressure because of powerful 110 Volt AC or DC motor and multiple ball bearing thrust. Other bearings self-aligning lifetime-lubricated Oilite type. Made for toughest year-in and year-out service in plant or on construction jobs. Amazing perpetual factory guarantee assures you of a lifetime of trouble-free use.

Full refund (you pay transportation) if not pleased with drill after trial.

$9.95 *TAKES ALL THREE*

BIG BARGAINS



1. SENSATIONAL, FASCINATING, AMAZING SELSYNS Brand new Selsyns made by G. E. Company. Two or more connected together work perfectly on 110V AC. Any rotation of the shaft of one selsyn and all others connected to it will rotate exactly as many degrees in the same direction, following unerringly as if the units were connected together by shafting instead of wire. This is true whether you twist the shaft of the master unit a fraction of a revolution or many revolutions. Useful for indicating direction of weather vanes, rotating directional antennas, or controlling innumerable operations from a distance. Complete with diagram and instructions. Per Matched pair $4.95.

2. RADIO HEADSETS. Latest supersensitive type with rubber earpieces. Every pair guaranteed perfect. $.59 per pair OR 3 PAIRS FOR $1.00.

3. HOME WORKSHOP AT BARGAIN PRICE. Accurate and precise 2 speed guaranteed hobby lathe, the essential machine for the home workshop. Sturdy enough for light production work or factory standby service. Supplied with 56" of belting for connecting to any available electric motor or power take-off, such as on a jeep or tractor. Also included in this unbelievable offer are such accessories as a 1/2" drill chuck with specially hardened tool steel jaws, a 4" electric furnace high speed grinding wheel, a cotton buffing wheel with a large supply of buffing compound, and a 4" steel wire scratch brush. Your cost $6.00. Sole export agent. Distributing inquiries invited.

HEAT GUN



Streamlined pistol grip heat gun in vivid red housing, that delivers a powerful 20 Cubic Ft. per minute blast of hot air at 160° Fahrenheit. Ordinary blowers have small fan motors, but this has a lifetime-lubricated AC-DC motor of the rugged vacuum cleaner type, that produces a hurricane of either hot or cold air. Perfect for blowing out dirt or dust, drying out ignition systems, warming up carburetors, drying paint, thawing out radiators, etc. Warning:—Keep this away from your wife, or she will be using it to dry her hair because it will do it in half the time of her ordinary hair dryer, to say nothing of her using it to dry stockings or clothing, or defrost the refrigerator instantly. Only $12.95. Satisfaction guaranteed or money refunded if returned prepaid within 5 days.

PE-109 32-VOLT DIRECT CURRENT POWER PLANT



This power plant consists of a gasoline engine that is direct-coupled to a 2000 watt 32 volt DC generator. This unit is ideal for use in locations that are not serviced by commercial power or to run many of the surplus items that require 24-32V DC for operation. **The price of this power plant is only $58.95.** We can also supply a converter that will supply 110V AC from the above unit or from any 16-32V DC source for **$12.95.**

(Due to the fact that the PE-109 comes to us sealed in heavy steel strapped govt. cases we are unable to determine whether the individual units are new or used or what the condition is if used, and consequently must sell them as is. In general, they represent a terrific bargain.)

CABLE ADDRESS BUFRAD **Minimum order $3.00—All prices subject to change—25% deposit with C.O.D. orders.**

BUFFALO RADIO SUPPLY, 219-221 Genesee St., Dept. 9S BUFFALO 3, N. Y.

Get this Valuable **BOOK**

for Home
Playroom
Summer Cottage
or Camp

If You're Building Your Own Fireplace

HERE'S AN EASIER FOOL-PROOF WAY TO DO IT

Choose a design that will look well with the materials you have available. Prepare a concrete or brick slab the size of your fireplace. Center your FYRO-PLACE, the warm-air circulating form, on the base, and build around it. You will have a well-engineered, successful fireplace You can't fail.

Book Also gives 10 Ideas for

OUTDOOR FIREPLACES

Now you can have the joys of an outdoor fireplace, at low cost. The FYRO-GRILL is a complete form around which you build your outdoor fireplace —simple or elaborate—as you wish, $19.95 at Buffalo.

WRITE FOR BOOK TODAY— Small book 4¼ x 5½ sent free. Larger book 8½ x 11, beautifully illustrated, 25c.

PRICE FIREPLACE HEATER & TANK CORP.
60 Austin Street, Buffalo 7, New York

Knife and sharpening stone in attractive gift box

Here's a wonderful buy—for yourself, or for a gift. Top quality CAMILLUS knife, Norton sharpening stone and directions. Only $2.00* at hardware and sport stores.

No. 63-B Knife 3⅝" closed. Maize plastic handle.

*May be higher on west coast

CAMILLUS *has the edge!*

Ka-MILL-us

CAMILLUS CUTLERY COMPANY, New York 17, N. Y.
Established 1876 . . . . Factory at Camillus, N. Y.

Aids to

Double-Walled Tumblers. These new iced-drink glasses of clear plastic are comfortable to handle as well as decorative, according to the maker, the Detroit Macoid Corp., Detroit. The air space acts as an insulator, preventing condensation on the outer surface. Sparkling and virtually unbreakable, the tumblers are enhanced by bright-colored felt inserts in the air space.

Electricity Cleans Silver. This gadget removes tarnish by electrolytic action, as in the familiar aluminum-and-soda method. But Touch-O ⓣ uses current from a single flashlight cell for speedy cleaning on contact of tarnished silver spoons and other small objects. Larger pieces take longer. Lux Industries, Buffalo, N. Y., is the maker.

Modern Living

Spring Holds Spices. Cans or boxes of seasonings are held in place on this metal rack by a coil spring. The holder is designed for the inner side of a cabinet door, but the makers, B and D Associates, of Rochester, N. Y., suggest it is equally useful in the bathroom for bottles or in the shop to hold boxes of tacks or nails. Containers in the rack are easily identified and shelf space is saved.



Rubber Backs Rugs. Rugback ⓣ, a United States Rubber Co. development, forms a tough, flexible, transparent rubber film when painted on the back of a rug. The company says the liquid dries in an hour and that it prevents rugs from slipping yet does not stick them to the floor. The price is $1 a pint, enough to cover about 40 sq. ft.

CELLULITE—Silvercote**

THE NEW DOUBLE-ACTION INSULATION

DOUBLE ACTION . . . NEWEST DEVELOPMENT IN BUILDING INSULATION! Two non-corrosive Silvercote membranes, one an asphalt-backed vapor barrier, reflect radiant heat. The two completely enclose a fluffy multi-fibre blanket whose millions of dead air spaces block heat by conduction and convection.

• Flameproof • Moisture Resistant • Pest Repellent • Contains no irritating fibres, odor, or dust • Scientifically tested and proved.

YOU CAN DO THE INSTALLATION JOB YOURSELF! Feather-light, CELLULITE-Silvercote is pleasant to work with, quick and easy to install.

Mail this today for descriptive folder

FREE

The Gilman Brothers Co.
Gilman, Conn.
Please send me full information about the new, double-action CELLULITE-Silvercote**
Name .....
Address .....
City ..... Zone .... State .....

**T.M. "Silvercote" Reg. U.S. Pat. Off. by Silvercote Products, Inc. T.M. "Cellulite" Reg. U.S. Pat. Off. by The Gilman Brothers Co.

CELLULITE

The Gilman Brothers Company
Gilman, Conn.

IT'S EASY TO
REMOVE PAINT
VARNISH, ENAMEL, SHELLAC, LACQUER

Don't paint over a cracked or peeling surface. It's so easy to remove it with Wonder-Paste. Applied with a brush, Wonder-Paste softens up any number of coats of paint, varnish, enamel, shellac, or lacquer...reduces it to a soft, unresisting sludge that yields readily to a putty knife.

Ask for Wonder-Paste at your paint or hardware store. Used by painters everywhere.

WONDER-PASTE

Write for Literature

Wilson-Imperial Company • 121 Chestnut Street, Newark 5, N. J.

IT'S EASY TO
"Trim-it-Yourself"
with
CHROMTRIM
METAL MOULDINGS

The perfected metal trim for wall or floor linoleum and building materials. 6' lengths. 8 shapes, easy to cut and apply.

Send 10c for "Trim Ideas" 16 page booklet. Over 30 projects and remodelling suggestions on where and how to use CHROMTRIM. Hints on lino-laying.

R. D. Werner Co., 291 Fifth Ave., N.Y. 16
Enclosed is 10c for CHROMTRIM "Trim Ideas" booklet P
Name _____
Address _____
City _____ Zone _____ State _____

REMODEL
KITCHEN
BATH • ATTIC

MAKE METAL
PROJECTS
with
CHROMTRIM



IT'S NEW

THE PUTTY MASTER

PLACES GLAZIERS SKILL IN YOUR HANDS

IT'S EASY

A putty knife with the patented shaper that anyone can operate—packs, shapes and trims putty perfectly with one stroke and allows only the right amount of putty to be applied—a time and money saving item that will more than pay for itself.

Only $1.00 Postpaid

anywhere in the United States.

I am enclosing $1.00—please send me one Duo-Fast Putty Master.
PUTTY MASTER
876 Fletcher Street, Chicago 14, Illinois

Name_____

Address_____

City and State_____

CADET DUAL VACUUM HORNS



At the Low Price We Can All Afford

Here is your chance to get air horn results—looks, blast and beautiful organ tone—at a fraction of the cost of air horns. Spun brass with gleaming chrome finish or lasting lacquer. Positive operation. Complete unit consists of one pair of beautiful vacuum horns with the mounting brackets, valve, control handle, hose, fittings and installation instructions. Can be mounted on front fendes or on top of or under the hood. A must for safety and smart appearance for any car. Chrome finish $29.50—Lacquer finish $23.75. Send check or money order and we will pay the postage—*or order C.O.D.*

The Protecturod Company Dept. 702
4033 Windsor Road - - Youngstown 7, Ohio

BUILD YOUR OWN POWER LAWN MOWER

WHY BREAK YOUR BACK MOWING FIELD OR LAWN?

WRITE FOR **FREE** Building Instructions The Rite-Way Mower Attachment ▶ Ball Bearing

SAVE MONEY SAVE TIME

Now anyone can save time and effort mowing field or lawn by building their own whirl type power mower. Build according to your own ideas and needs at small cost. Cut close to fences, walks, buildings, etc. Build in short time with parts and instructions we furnish. Save hours of time and back breaking labor. Write today for FREE information.

T & H MFG. CO., Dept. M-119
811 E. 31, Kan. City 3, Mo.

Aids to Modern Living

Hot Dogs Cooked Electrically. Preparing frankfurters at the table is simple with this small plastic cooker. After the dogs are pressed on the carbon electrode prongs, current is switched on automatically by closing the lid. The current flows through the frankfurters, which offer enough resistance to cook in one to two minutes. Triar, Inc., of Detroit, makes the cooker. Salts and moisture within the frankfurters are sufficiently conductive to carry a heating current.

Baby Bottle Has Air Valve. The No-Burp Nursing Bottle Ⓣ, offered by Baby Products, Inc., of Los Angeles, has an air intake valve built into the removable plastic base, minimizing the amount of air a baby swallows when feeding. The valve permits air to enter the bottle to replace the milk drawn from it by the baby.

Wind Gauge Fits Pocket. The Windikator Ⓣ shows wind direction and velocity, weighs less than 2 oz., is nonmagnetic, and corrosion resistant. The H. M. Sawyer and Son Co., of Cambridge, Mass., manufactures two models—one registering winds from 5 to 30 m.p.h. and the other from 10 to 50 m.p.h. The company guarantees the accuracy to plus or minus 5 percent.

Pin-Up Alarm Clock. A combination wall and table electric clock, the Pinwall Ⓣ has all controls on the front and may be used with or without the bracket. The clock, made by Telechron, Inc., of Ashland, Mass., is 2¾″ by 4¾″ by 7½″ with a 6′ cord attached. The case is ivory plastic set on a brown plastic base. The metal dial has ivory-colored characters on brown. Price: $7.95.





Lined Record Envelope. A soft, velvetlike lining in these new record envelopes is said to protect records and keep them free of dust and grit. The maker, Ever-Kleen Sales Co., of San Diego, Calif., recommends that a record be twirled a couple of times in the envelope to take dust out of the grooves before playing it.

NOW

THE JIFFY METAL CABINET
WITH RUSTPROOF ALUMINUM DRAWERS

32 DRAWER UNIT $8.95
POSTAGE PAID
64 DRAWER UNIT $15.95



APPROXIMATE SIZES
DRAWER
1¼″ Deep
2¼″ Wide
6″ Long

32 DRAWER UNIT
6″ Deep
12¼″ Wide
15¼″ High

64 DRAWER UNIT
6″ Deep
25½″ Wide
15¼″ High

for home or shop, the handy way to keep small parts, washers, nuts, bolts, nails, screws, etc.

AND STILL AVAILABLE
32 DRAWER UNIT $5.95
POSTAGE PAID
64 DRAWER UNIT $9.95

Solid one-piece aluminum drawers for greater strength and long life—and still at low cost. So handy to keep office, shop, work bench, household and hobbyist needs at your fingertips. Spot welded steel cabinet, enamel finish, and metal flange drawer guides.
32-Drawer Unit—$8.95. 64-Drawer Unit—$15.95. Postage Paid. Send check or money order. No C. O. D.'s, please. Add 3% sales tax for Ohio orders.

THE JIFFY METAL CABINET
WITH LAMINATED FIBREBOARD DRAWERS

Same steel cabinet as above with covered fibreboard drawers. Suitable for most home needs. Thousands in use. 32-Drawer unit—$5.95. 64-Drawer unit—$9.95. Postage Paid. Check or money order. No C.O.D.'s. Add 3% sales tax for Ohio orders.

KAYTEE PRODUCTS
DEPT S • BOX 588 • CANTON, OHIO

TO: Reader
FROM: Editor

PS Hits 550 m. p. h.

WHEN I started to climb into the plane, Tony LeVier, the pilot, asked, "Are you nervous?"

"No," I said. I wasn't, I suppose, because LeVier is one of the world's great airmen. I had confidence in him.

We were about to take off in the Lockheed TF-80C Shooting Star jet trainer. By the luck of the draw at Andrews Field, near Washington, D. C., I was to be one of a handful of civilians and the first professional writer in the United States to fly more than 500 miles an hour. My fellow writers, invited to make the flight by the U. S. Air Force, stood about watching as I took one last tug at my crash helmet.

Then I was in the rear cockpit; the long, plastic canopy came down, and we were taxiing out to the runway to the muttering of gases in the plane's tailpipe.

We were no sooner squared away than the throttle was opened. Unlike a reciprocating engine, a jet needs no warmup. The pressure on my back as the plane accelerated was no more than that in a conventional plane.

We made knots fast. The airspeed needle wound up. We came unstuck. We were airborne. My first reaction was, "How simple!" The familiar vibration associated with propeller aircraft was almost absent. So was the noise. The sensation was pleasant. LeVier was clocking 170 miles an hour as we climbed.

At 2,000 feet he levelled off. "Okay?" said LeVier through the interphone.

"Okay," I replied. I was. This was without question the most exhilarating experience I had ever had in an airplane.

"How does it feel?"

"It's the nearest thing to riding in a glider I've ever known," I said. And it was. Most of the sound reaching my ears appeared to be the swish of air caressing the long, sleek fuselage. It was like being suspended in space. There was, of course, no sensation of speed as the air speed built up. We were too far off the ground to have anything to compare our speed with.

The nose came up. We were climbing again. It seemed only a moment until we were at 10,000 feet.

"Want to feel some Gs?" asked my pilot.

We banked. The great speed in the turn crunched me down in my seat. We did an aileron roll. The maneuver was over before I knew it. We dived.

"I'm putting on the dive brakes," said LeVier.

It was a near-jolt as the brakes took hold. Down we went again, brakes retracted. My ears cracked as we levelled off on the deck, circled, and raced across the field a hundred feet above the runway.

The clock said 550 miles an hour.

I could only think, "Whew!" Off the wing I glimpsed the little knot of people watching from the apron. Then they were gone and the plane was climbing to make its approach for the landing.

LeVier sat her down at 110 miles an hour far more softly than I ever have put down the little putt-putts that I fly myself.

When we had come to a stop on the apron and I had unfastened my seat belt and shoulder harness, I discovered it was quite a job getting over the side of the cockpit and onto the wing root. The crowd was watching.

"Legs must have gone to sleep," I explained.

A man couldn't admit that his knees were weak.

Darcy Francis

Buying Home Heating?

Look at the Name...

CHRYSLER AIRTEMP

● Chrysler Corporation has put into its Chrysler Airtemp heating units the same advanced engineering and modern production skills which have distinguished Chrysler cars and trucks—creating heating equipment unexcelled for performance, efficiency and reliability.

Look at the Product...

● Smart, streamlined, modern! Look at the "take-life-easy" features! Look at the rugged, durable construction, and automatic operation precise as a stop-watch. A diversified line—stokers, boilers, furnaces, water heaters—everything for every size of home!

SEE YOUR CHRYSLER AIRTEMP DEALER SOON! He is a heating specialist, and will gladly help you plan the right system for your home. See the Chrysler Airtemp dealer in your vicinity today or write to us direct.

Look at the Economy...

● Chrysler engineers have thoroughly explored new ways of extracting maximum heat from home fuels . . . and incorporated their findings in a line of products truly outstanding in fuel economy. Yes, Chrysler engineering pays off for you in perfect comfort at low cost!

Please send complete information on Chrysler Airtemp Heating.

NAME_____

ADDRESS_____

CITY_____ZONE___STATE_____

PS

"WE CONTROL THE WEATHER INDOORS"

Chrysler Airtemp

AIRTEMP DIVISION OF CHRYSLER CORPORATION • Dayton 1, Ohio
In Canada: Therm-O-Rite Products, Ltd., Toronto

SOUTH BEND 9" PRECISION LATHE

This quality-built lathe gives workshop owners the capacity for work of industrial caliber. Its precision and versatility makes it possible to perform a wide range of operations to close tolerances. Numerous attachments are available for special classes of work such as milling, grinding and wood turning.

Mail coupon for complete information or see local distributor. He is listed under "Machine Tools" or "Lathes" in your classified telephone book.

SOUTH BEND LATHE WORKS
Building Better Tools Since 1906
456 E. MADISON ST., SOUTH BEND 22, INDIANA

SPECIFICATIONS
of 9" Model A Lathes

SWING—9¼" over bed and saddle wings. 5½" over saddle cross slide.

BED LENGTHS—3, 3½, 4, or 4½ feet

DISTANCES BETWEEN CENTERS—16" to 34"

SPINDLE SPEEDS—Twelve, 41 to 1270 r.p.m.

OPTIONAL DRIVES
Six Speed—41 to 658 r.p.m.
Sixteen Speed—46 to 1176 r.p.m.

POWER LONGITUDINAL FEEDS—Forty-eight—.0015" to .0853"

POWER CROSS FEEDS—Forty-eight—.0004" to .0252"

THREAD CUTTING RANGE—48 pitches, R.H. or L.H.—4 to 224 per inch

MAXIMUM COLLET CAPACITY—½ inch

SPINDLE BORE—¾ inch

NEW 14 INCH DRILL PRESS

A ruggedly built tool unsurpassed for accuracy, ease of operation and dependable performance. Prices include 1/3 h.p., single ph., 60 cy., 115 V. motor and switch—f.o.b. factory.

Bench Model, $129.30
Floor Model, $144.30

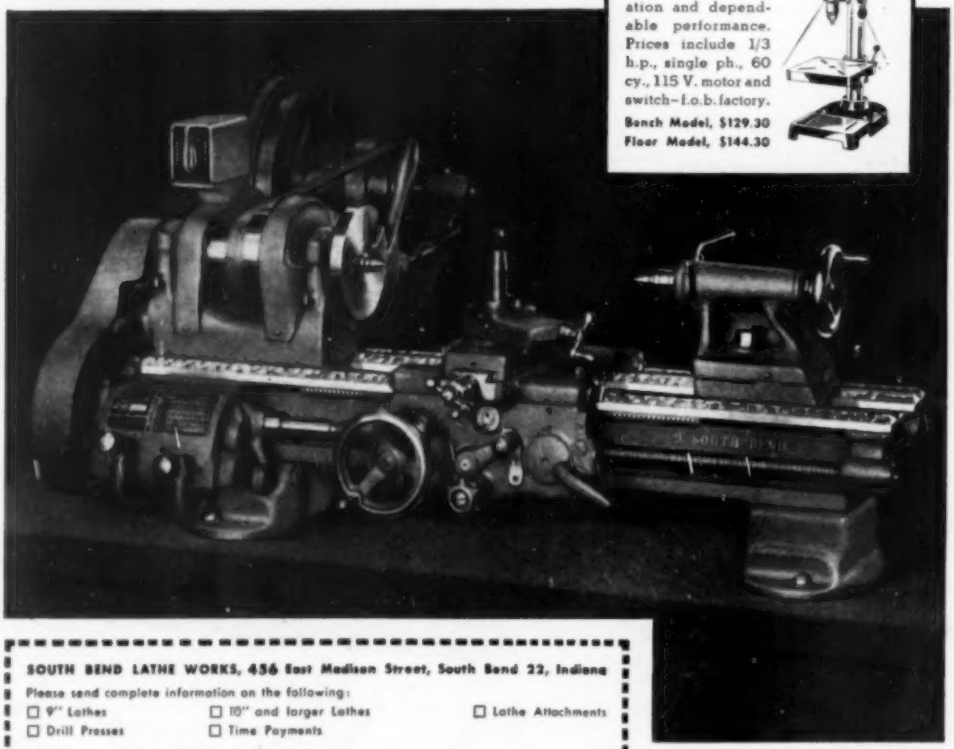

SOUTH BEND LATHE WORKS, 456 East Madison Street, South Bend 22, Indiana

Please send complete information on the following:

☐ 9" Lathes ☐ 10" and larger Lathes ☐ Lathe Attachments
☐ Drill Presses ☐ Time Payments

NAME _____

STREET _____

CITY _____ STATE _____

9" x 3' Model A 12-Speed Bench Lathe with 1/2 h.p., 1 ph., 60 cy., 115 V. motor and drum switch—f.o.b. factory **$344.45**

Other models priced from $160.

THE HOME MECHANIC'S HANDBOOK

PAINTING
DECORATING
WOODWORKING
METALWORKING
PLUMBING
MASONRY
ELECTRICAL WORK

HERE'S AN AMAZING OFFER

We are going to give you a copy of **The Roof Over Your Head** absolutely FREE! This up-to-the-minute book of home building and planning contains hundreds of practical facts for the man who is thinking about owning his own home. It tells exactly what to do and what not to do to safeguard your investment and insure the happiness of your family. Accept this down-to-earth guide now—it's especially designed to save you time, money and disappointments—and you get it absolutely *free!* Just mail the coupon.

THE

you
this b
FR

FREE a brand-new book of Home Building and Planning LOOK INSIDE

HERE ARE JUST A FEW OF THE PRACTICAL JOBS FULLY DESCRIBED IN THE HOME MECHANIC'S HANDBOOK

- How to choose the right paint for every job
- Figure the quantity of paint needed
- Paint a house
- Stain, varnish, shellac, and wax furniture
- Refinish or touch up auto
- Paper a room
- Repair cracks in plaster
- Put glass in windows
- Replace a sash cord
- Shingle or repair a roof
- Screen in a porch
- Tighten a loose chair, floor board or stair tread
- Fix a window, door or drawer that sticks
- Fit screens, storm windows, doors
- Build a chicken house, cupboard, workbench, storage cabinet
- Measure, cut, thread, join, and assemble pipe
- Fix leaks in faucets and valves
- Thaw frozen pipes
- Install a hot-water heater
- Make a flagstone walk, a sidewalk, concrete steps
- Waterproof concrete
- Build a brick fireplace
- Install glass blocks
- Install a call-bell system or a burglar alarm
- Locate a short circuit
- Repair electrical equipment and appliances
- Fix a radiator

CUT OUT AND MAIL THIS POSTAGE-FREE CARD

BUSINESS REPLY CARD
No Postage Stamp Necessary If Mailed In The United States

POSTAGE WILL BE PAID BY
D. VAN NOSTRAND CO., INC.
250 FOURTH AVENUE
NEW YORK 3, N. Y.

FIRST CLASS
Permit No. 3702
(Sec. 510 P. L. & R.)
New York, N. Y.

SOUTH BEND 9" PRECISION LATHE

This quality-built lathe gives workshop owners the capacity for work of industrial caliber. Its precision and versatility makes it possible to perform a wide range of operations to close tolerances. Numerous attachments are available for special classes of work such as milling, grinding and wood turning.

Mail coupon for complete information or see local distributor. He is listed under "Machine Tools" or "Lathes" in your classified telephone book.

SOUTH BEND LATHE WORKS
Building Better Tools Since 1906
436 E. MADISON ST., SOUTH BEND 22, INDIANA

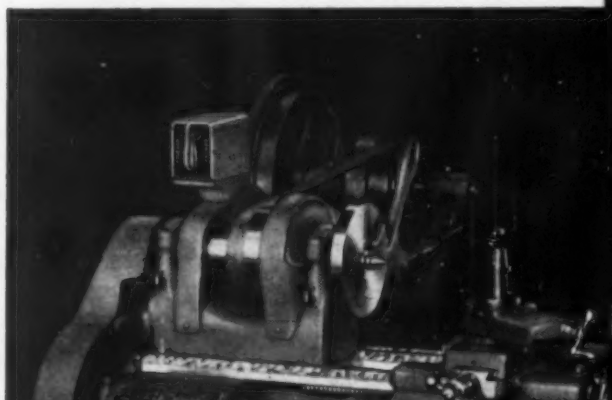

SOUTH BEND LATHE WORKS, 436 East Madison Street, South Bend 22, Indiana

Please send complete information on the following:

☐ 9" Lathes ☐ 10" and larger Lathes ☐ Lathe Attachments
☐ Drill Presses ☐ Time Payments

NAME _____

STREET _____

CITY _____ STATE _____

THE HOME MECHANIC'S HANDBOOK

PAINTING
DECORATING
WOODWORKING
METALWORKING
PLUMBING
MASONRY
ELECTRICAL WORK

HERE'S AN AMAZING OFFER

We are going to give you a copy of **The Roof Over Your Head** absolutely FREE! This up-to-the-minute book of home building and planning contains hundreds of practical facts for the man who is thinking about owning his own home. It tells exactly what to do and what not to do to safeguard your investment and insure the happiness of your family. Accept this down-to-earth guide now—it's especially designed to save you time, money and disappointments—and you get it absolutely *free!* Just mail the coupon.

HERE IT IS

MOST USEFUL BOOK YOU'LL EVER OWN!

Here, in one great, brand-new volume is EVERYTHING you need to know to do ANY job in or around your home—repairs, alterations, improvements, and new projects.

The Home Mechanic's Handbook

COMPLETE INFORMATION ON EVERY PRACTICAL TRADE
BIG—AUTHORITATIVE—TREMENDOUSLY HELPFUL

Turn to this comprehensive HANDBOOK with confidence. You will find its helpful pages crammed with the latest, most efficient and workmanlike ways of doing every kind of job about the home and in the home workshop. Carpentry, metal work, electrical work, plumbing, masonry, painting and decorating—all explained by master craftsmen. The most detailed information about how to choose, repair, and apply the right materials in the right places.

Every move in the use of tools is shown by vivid hands-at-work photographs. All the important operations and those "tricks of the trade" that play so great a part in good craftsmanship are explained and made crystal clear by detailed step-by-step drawings. There are complete directions, fully illustrated, for thousands of jobs, small and large—from fixing a broken window to installing a hot-water heater; from varnishing a chair to painting a house.

PAINTING & DECORATING

Principles of paint mixing, formulas, and how to obtain any desired hue. Full directions for selection and care of brushes and other equipment. How to calculate amount of paint required, and best methods of applying to wood, metal, brick, concrete, stone, stucco, plaster. Exterior house painting—interior house painting—choice of color schemes. Complete directions, fully illustrated, for obtaining decorative effects—stippling, mottling, texturing, stenciling, striping, etc. Methods of finishing with stain, shellac, varnish, and wax. Detailed, step-by-step instructions for wallpapering. How to refinish an auto quickly, easily, and inexpensively.

WOODWORKING

The many varieties of wood and their relative merits, working qualities, and uses. Plywoods, veneers, and wood substitutes—how to choose the materials best suited for the job. Sizes, types and functions of all carpentry tools—how to use, sharpen, and adjust them. All the basic operations and processes of woodworking—everything from how to avoid warping to full directions for cutting each of the common joints. Wood turning—the different cuts, roughing, facing, sanding, and finishing; drilling, boring, mortising, spinning, polishing. Hundreds or repair jobs and new projects are fully explained with diagrams and every fact you need to get the best results.

PLUMBING

The various kinds of pipe, pipe fittings, valves, and fixtures. All the common plumbing tools—types, sizes, functions, and how to use them. How to cut, ream, thread, and assemble iron and brass pipe. How to connect copper tubing and make lead joints. The technique of pipe fitting, and the proper sequence of steps in assembling a piping system. Household plumbing projects—installing a hot-water heater, radiator, and various other units. How to drain a plumbing system when closing the house for the winter. How to fix leaky faucets, and repair or replace a faulty section of pipe.

METALWORKING

Complete information about all the common metals, and the alloys—wrought iron, cast iron, steel, German silver, pewter, the brasses and bronzes, solders and babbitts—when to use, how to use, and how to work them. Hand tools and machine tools—their specific purposes, sizes, and the most detailed instructions for their use. Hints, ideas, and "tricks of the trade." How to use the engine lathe. Metal jobs and projects for home and shop, complete with bill of material, equipment needed, and a fully illustrated account of every step in the work.

MASONRY

Answers every practical question about concrete, plastering, stucco, brickwork, concrete-block and glass-block construction. Describes all tools, and just how to use them. How to specify materials and estimate quantities. How to build forms; mix concrete, color it, make it watertight, finish it off; how to build walls, floors, steps. Everything about plastering—from small repairs to doing entire rooms. Complete instructions for stuccoing—reinforcing, methods of applying different coats, and how to obtain various decorative finishes. Kinds of brick—handling and laying. Mixing and coloring mortar. Material charts. Types of construction. Various bonds. Forming cross joints. Fireplace construction. Working with concrete blocks—building the wall, corner construction. Kinds and sizes of glass blocks. Glass-block construction—mortar, full-mortar joints, set-in-wood construction.

ELECTRICAL WORK

Practical information about every electrical job the home mechanic may undertake around the house or in the home workshop. Principles of electricity—volts, amperes, ohms. Generation of electricity. Electrical energy and power. Fuses and circuit breakers. Parallel and series circuits. Standard electrical symbols. Tools, materials, and requirements of National Electrical Code. Complete, fully illustrated explanations of every step in various operations of general electrical work—splicing, soldering, taping, testing, etc. Installation of various signalling systems—bells, buzzers, and alarms. Wiring methods for power and lighting circuits. Complete projects for the home, such as BX wiring a room, and wiring a garage in conduit and BX. Portable appliances—fans, mixers, clocks, heaters, radios. Fixed equipment—oil burners, refrigerators, lighting plants, pumps, motors, generators, and control devices; all clearly described, with practical suggestions and hints for trouble-shooting and adjustment.



Yes, **this big-value book, "The Roof Over Your Head", is absolutely free. It's yours to keep, a gift from us. Profusely illustrated and jam-packed with useful information, this practical guide to home building and planning contains facts, figures, photos and sketches, *plus* eight basic home plans and a comprehensive cost chart that permits you to select a home that fits your wants, your needs, and your pocketbook. Accept this helpful book with our compliments—it can save you time, money and disappointments—and you get it absolutely FREE. Just cut out and mail this postcard**

SEND NO MONEY

Examine The Home Mechanic's Handbook at Our Risk

Don't send us any money, not a penny. Just fill in and drop this postage-free card in the mail box and you will receive "The Home Mechanic's Handbook" to examine for 10 days at our risk. What's more, you will also receive a copy of "The Roof Over Your Head" absolutely free—a gift from us that is yours to keep even if you should return "The Home Mechanic's Handbook."

So send in this postcard now. There is no obligation, no agents will call on you, you have nothing to lose.

D. VAN NOSTRAND COMPANY, INC. Pop. Sci.—Sept. 1948
250 Fourth Avenue, New York 3, New York

Please send me a copy of "The Home Mechanic's Handbook" and my FREE copy of "The Roof Over Your Head." Within 10 days I will either return "The Home Mechanic's Handbook," or send you $2.95, plus a few cents postage, and $2.00 a month for two months until the total price of $6.95, plus postage, is paid.

(If you send the entire amount of $6.95 with this coupon, we will pay the postage. Same return privilege and refund guarantee if not completely satisfied.)

Name.....

Address.....

City.....Zone.....State.....

Reference.....

Address.....

In Canada, Order From: D. VAN NOSTRAND COMPANY (CANADA) LTD.
228 Bloor Street West, Toronto, Canada

WATCH THAT WING!

R. J. Reynolds Tobacco Company, Winston-Salem, N. C.

According to a Nationwide survey:

MORE DOCTORS SMOKE CAMELS THAN ANY OTHER CIGARETTE

Three nationally known independent research organizations asked 113,597 doctors to name the cigarette they smoked. More doctors named Camel than any other brand.

MORE PEOPLE ARE SMOKING CAMELS THAN EVER BEFORE

THE CHOICE OF EXPERIENCE